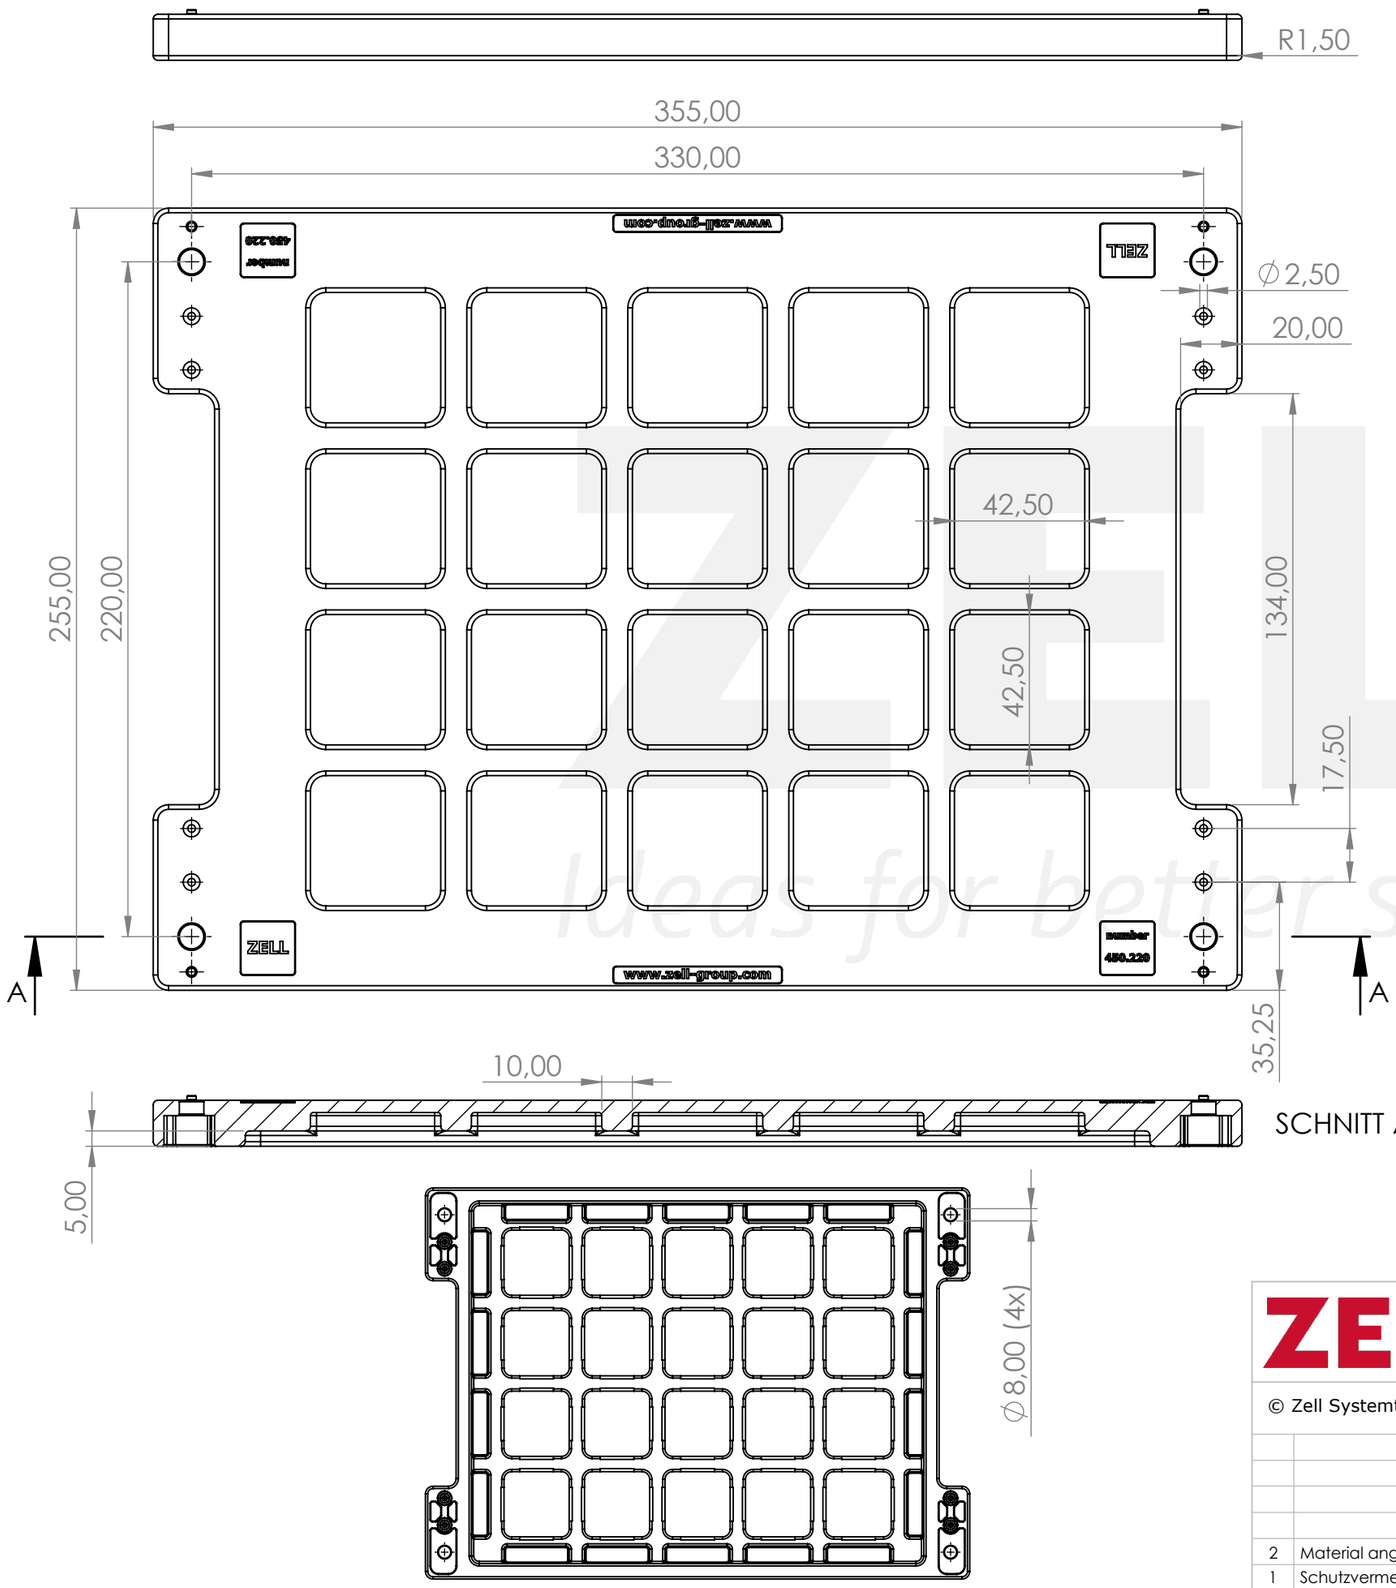

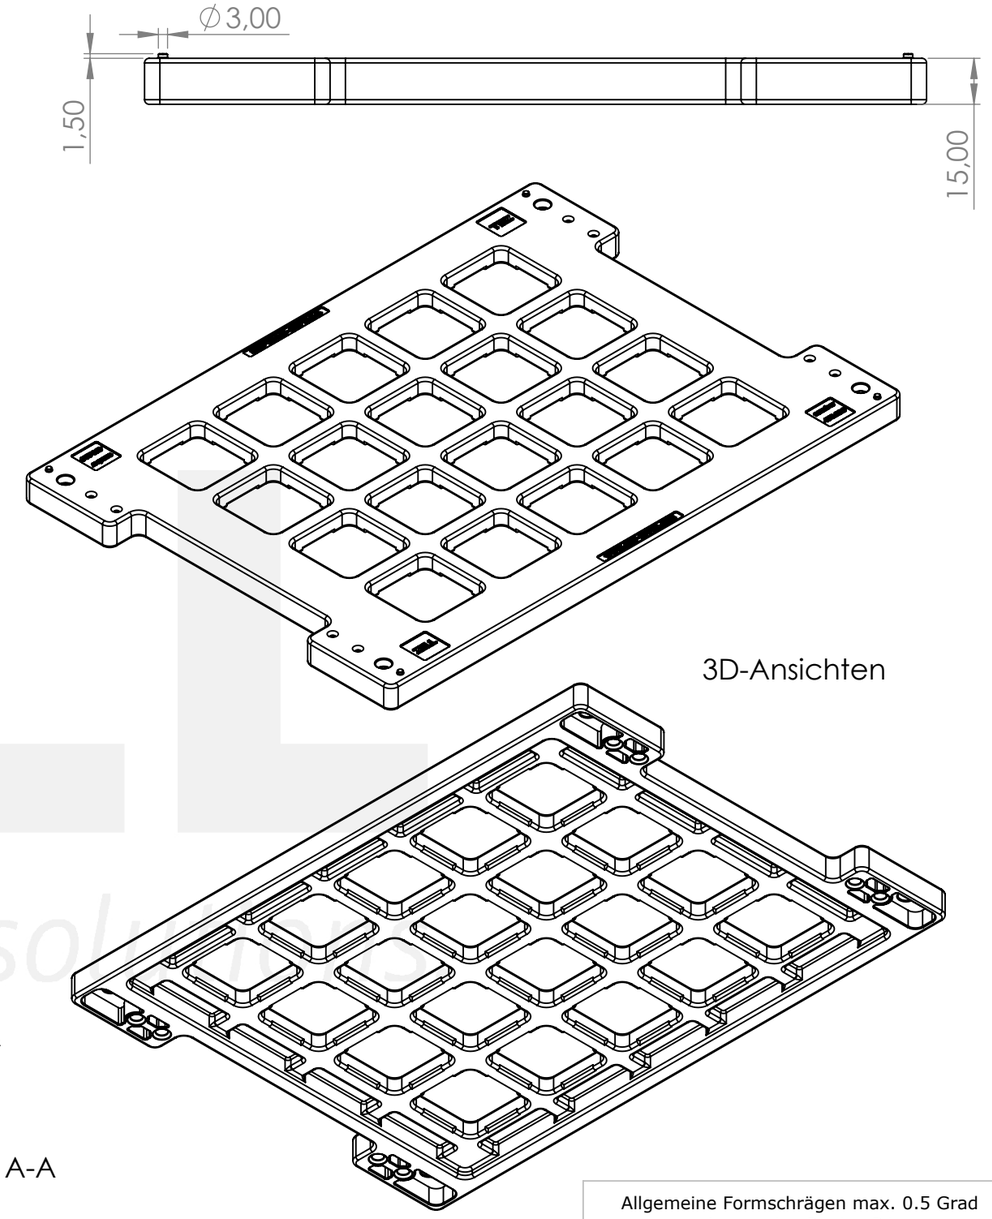

Allgemeine Formschrägen max. 0.5 Grad
Allgemeine Radien R1

Allgemeine Toleranzen nach DIN ISO 16742 / TG6

über	1	3	6	10	18	30	50	80	120	180	250	315	400
bis	3	6	10	18	30	50	80	120	180	250	315	400	500
	±0,07	±0,12	±0,18	±0,22	±0,26	±0,31	±0,37	±0,57	±0,8	±0,93	±1,05	±1,15	±1,6

ZELL

ZELL Systemtechnik GmbH
Zum Tannenesch 24
89584 Volkersheim
+49 7391 77004 - 0

Maßstab: 1:2 / 1:4

Werkstoff: PA6GF15GB30

Oberflächengüte: glatt

Blech /- Materialstärke:

Gewicht: 664,369 g

© Zell Systemtechnik GmbH 2019

	Datum	Name
Erstellt	05.05.22	I.Zell
Geprüft	08.07.26	F.Fiseli
Norm		

Schutzvermerk nach DIN ISO 16016

Bezeichnung: PA Träger 355x255 mm mit 20 Rastungen, 52,5x52,5 mm

Zust.	Änderungstext	Datum	Name
2	Material angepasst	08.07.26	FF
1	Schutzvermerk	18.11.24	TK

Kunde: Zell Gruppe

Artikelnummer: **450.220.01**

Blatt 1 von 1

A3

Neu: www.zell-group.com

Ers. f.

Ers. d.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.