


Pre-made Pouch Filler / Sealer TT-8D-R



- Widely flexible for various pouch formats and product types.
- Designed for safe and sanitary operation.
- Easy cleaning, washdown design.
- Simple, intuitive operation and maintenance using touch screen controls.
- Pouch size handling capability made wider than our model TT-8CR.

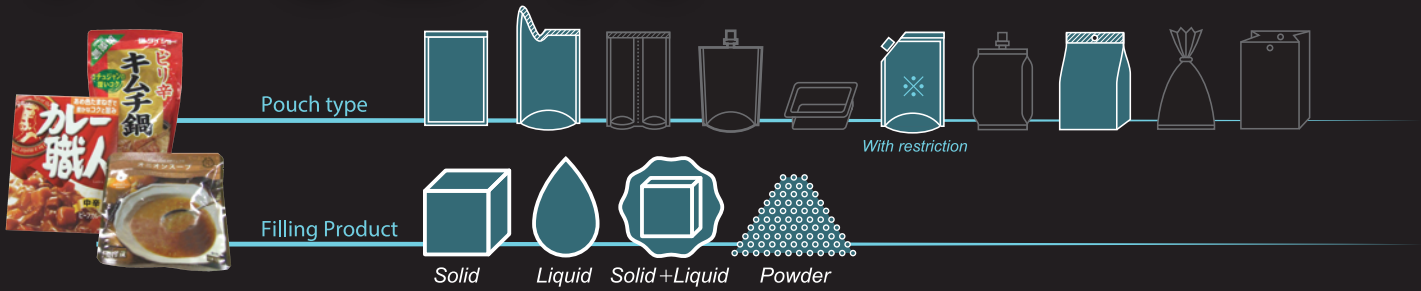

Retort/Hotfill



Wet Use



Stations



Simplex





Conveyor Magazine

Flat, standup & floating gusset pouch styles.
Optional ptc zipper / corner spout styles.
Standard & high capacity versions.



Pouch Opening & Filling

Precise pouch handling & opening assure product is properly & cleanly filled into the pouch.




Liquid Filling Pump

Simple access for easy cleaning.

Machine Dimensions

* F Specifications & dimensions subject to change without notice

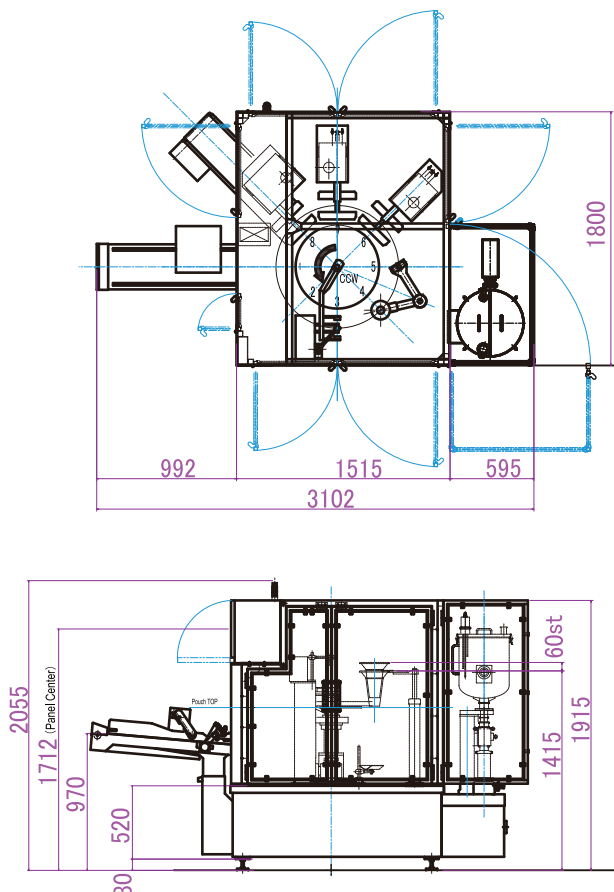

Machine Specifications

* Depending on product

Capacity	max. 40 ppm
Pouch Size	W: 120 - 260, 80 - 220 mm L: 130 - 400 mm
Pouch Material	Various laminated pouches, PE pouch
Pouch Style	Flat, standup & floating gusset. Optional ptc zipper or corner spout styles.
Filling Method	Various pump depending on filling product
Liquid Filling Volume	Choice of 300, 500 & 1000ml interchangeable pumps
Air Evacuation	Press Type
Sealing Method	3-stage heat/heat/cool sealing method
Electric Power	3.75 KVA
Air Consumption	0.5MPa (72psi), 350 - 450NL/min (ANR)
Machine Dimension & Weight	W 3,102 x L 1,800 x H 2,055 mm 1,800Kg
Accessories	Product feeding hopper, Product discharge conveyor Pouch opening follow-up guide, Product counter, Heater disconnection alarm Pouch opening detection device
Options	Date printer, Air squeeze device, Tapping Stand-up pouch bottom opening device N2 Gas flush device, Zip open-close device Fill pause mode, Seal area cleaning, Pouch recycle Double pouch detection, Various filling device, Pouch pick-up position detection, Product in seal detection

Applications

Shelf stable food, Delicatessen, Frozen foods, Pre-cooked rice, Juice, Seafood
Liquid detergent and many others