

Part Number: ICS-STD 2X2x2 PT Pass Through

About:

Designed as a vital accessory for ISO-classified cleanroom environments, the Instant Cleanroom Solutions Pass Box facilitates the safe transfer of tools, samples, and small equipment between clean areas or between clean and non-clean zones. Featuring an integrated interlocking system (electronic or mechanical) to ensure both doors cannot open simultaneously, it minimizes cross-contamination and maintains air pressure integrity.




Dimensions Standard Pass Through: <i>*modifiable</i>		
Width	Length	Depth
2'	2'	2'


Operating Environment and Safety Limits	
Temperature Range	-5°C to 45°C
Relative Humidity	< 85% (at +35°C)
Atmospheric Pressure	86 kPa to 106 kPa
Safety Interlock Feature	UV lamp safety lock (operates only when both doors are closed)

General	
Interlock type	Electronic Interlock System / Mechanical Interlock Option
Internal Chamber Material	Stainless Steel
Cabinet Construction	Powder-Coated Steel / Stainless Steel
Power Supply	AC 220V, 50/60 Hz

Optional: call for customizations	
Sterilization	Internal UV Germicidal Lamp with Dual-Side Controls
Lighting	Internal LED Lighting

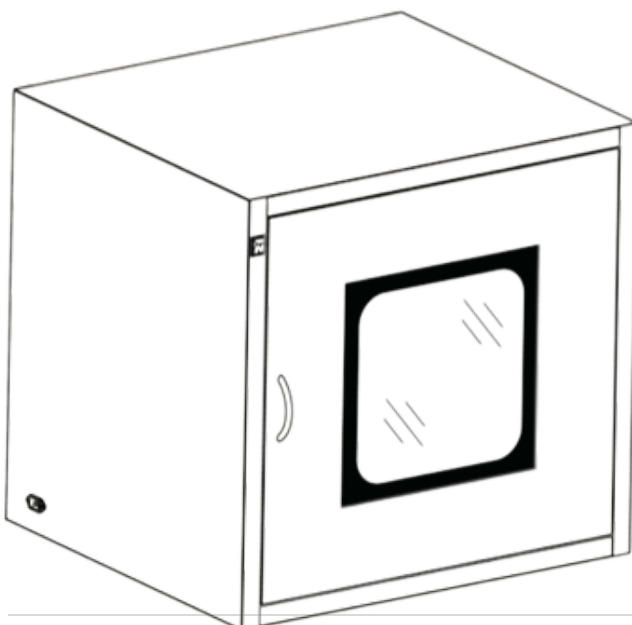

This document is intended for the sole use of the individual or entity to which it is addressed and may contain information that is privileged, confidential, or prohibited from disclosure by law. If the viewer of this document is not the intended recipient or the employee or agent responsible for delivery of this document to the recipient, you are hereby notified that dissemination, distribution, or copying of this document may be prohibited, a violation of the law, or both. If you have received this document in error, please notify the sender immediately. Thank you for your courtesy.

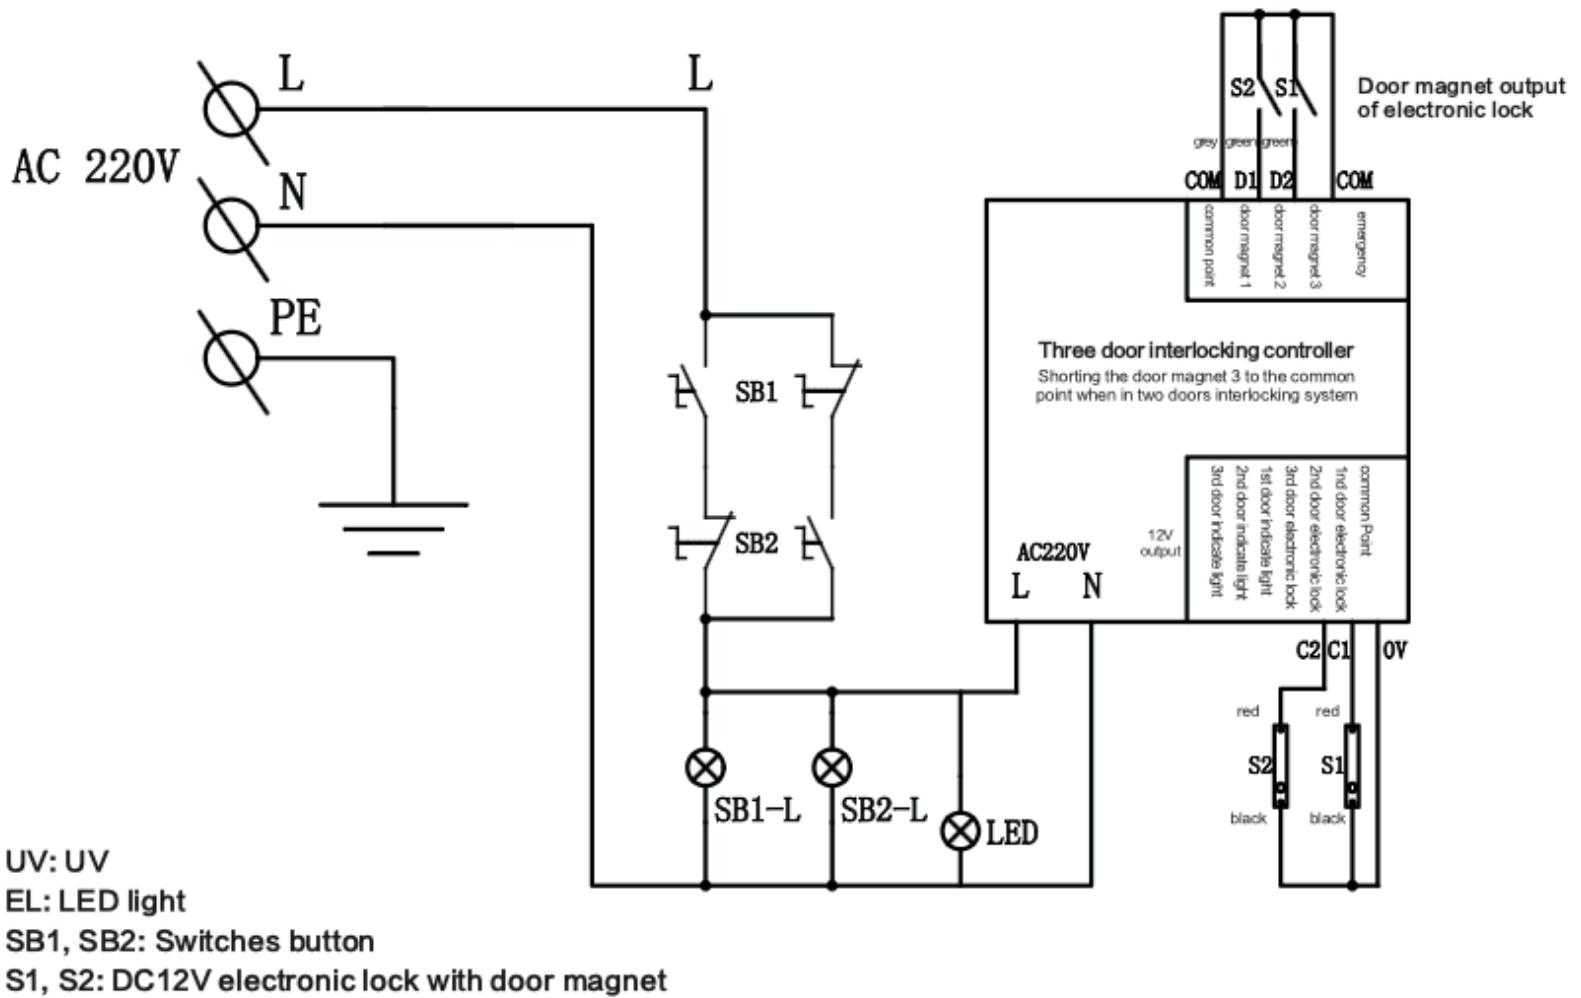

- ① Cabinet
- ② Door
- ③ Handle
- ④ Stainless steel internal chamber

