

Two-Bay Commercial Swing



Technical Data



DIMENSIONS

2.25 x 3.23 m



HEIGHT

2.1 m



SAFETY ZONE

7 x 2.85 m




FREE-FALL HEIGHT

1.1 m

Conforms to: BS EN 1176-1:2017

Dimension Drawing

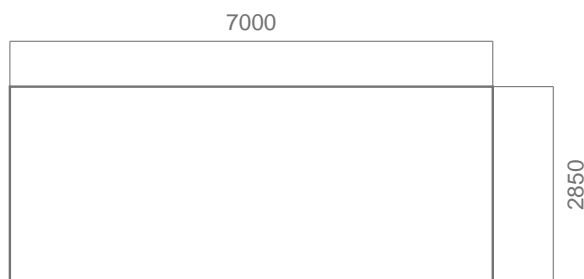

Two-Bay Commercial Swing

Materials & Construction

Frame: galvanized steel tube, diameter 88.9mm, powder-coated

Seats: rubber TPE (injection-moulded, metal insert) or TPV (aluminium insert) — seat choice available

Suspension: stainless steel chains

Fixings: plastic-capped bolts/nuts

In accordance with BS EN 1176-1:2017, this product requires impact-absorbing surfacing appropriate to its free-fall height.

The equipment shown is a computer visualisation only; the actual product will look similar. Colours may vary from those shown. Construction materials can be tailored to the customer's requirements. Dimensional tolerance +/- 5cm.

Additional Views



Why Choose This Product

A standard two-bay swing frame for general playground use, with a choice of seat types including rubber-coated TPE/TPV seats for everyday comfort and durability.

- Constructed from galvanized steel tube, diameter 88.9mm, powder-coated for years of reliable outdoor use
- Certified to BS EN 1176-1:2017 for public playground safety