


Double Tyre Seesaw



Technical Data

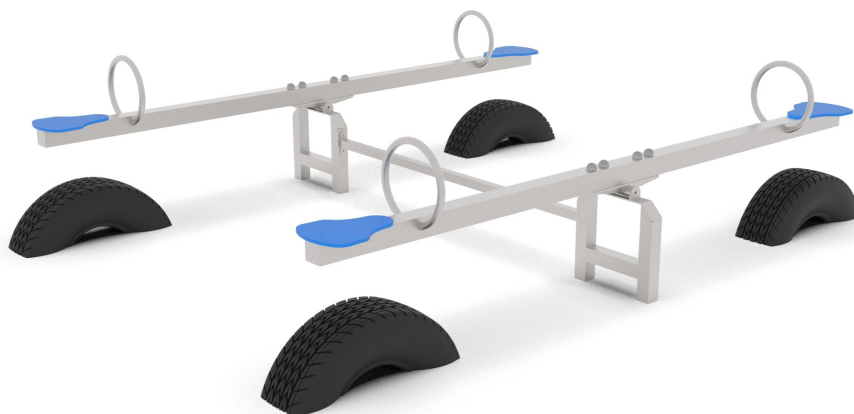

DIMENSIONS

2.46 x 3.03 m



HEIGHT

0.97 m



SAFETY ZONE

4.46 x 5.03 m



FREE-FALL HEIGHT

0.77 m

Conforms to: BS EN 1176-1+A1:2024

Double Tyre Seesaw

Materials & Construction

Frame: 80x80mm galvanised powder-coated steel

Seats: colour HDPE


Buffers: tyre

Fixings: plastic-capped bolts, protected joints

In accordance with BS EN 1176-1+A1:2024, this product requires impact-absorbing surfacing appropriate to its free-fall height.

The equipment shown is a computer visualisation only; the actual product will look similar. Colours may vary from those shown. Construction materials can be tailored to the customer's requirements. Dimensional tolerance +/- 5cm.

Additional Views

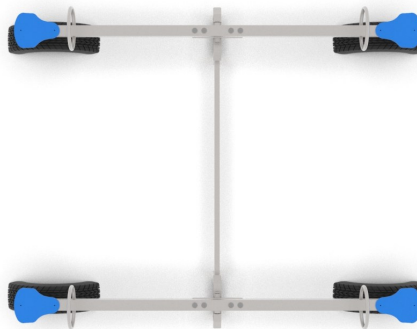

Why Choose This Product

Four seats across two beams that meet at a central frame, with chunky tyre buffers softening every bounce. It can be extended with further sections to suit larger groups and bigger spaces.

- Constructed from 80x80mm galvanised, powder-coated steel with colour HDPE seats and tyre buffers
- Certified to BS EN 1176-1+A1:2024 for public playground safety