


Calisthenics Training Frame



Technical Data

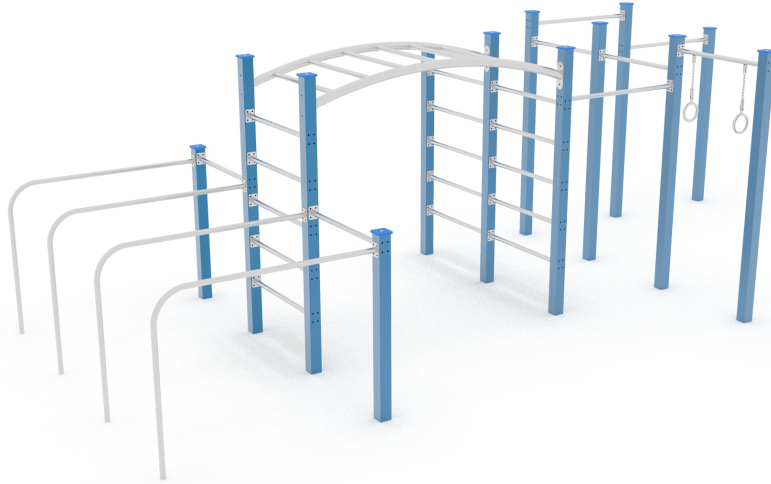

DIMENSIONS

2.74 x 6.83 m



SAFETY ZONE

5.74 x 9.83 m



HEIGHT

2 m



FREE-FALL HEIGHT

2 m

Conforms to: BS EN 16630:2015

Calisthenics Training Frame

Materials & Construction

Frame: 80 x 80 mm steel profile, zinc-primed and powder-coated

Bars & handrails: stainless steel

Fixings: bolts capped with plastic protectors where required

Warranty: 48 months unit / 10yr HDPE / 15yr structural

In accordance with BS EN 16630:2015, this product requires impact-absorbing surfacing appropriate to its free-fall height.

The equipment shown is a computer visualisation only; the actual product will look similar. Colours may vary from those shown. Construction materials can be tailored to the customer's requirements. Dimensional tolerance +/- 5cm.

Additional Views



Why Choose This Product

The Calisthenics Training Frame occupies a low, ground-hugging footprint at just 2 m high, giving teenagers and adults a run of bodyweight training bars and stations without a tall silhouette — a good fit for sites with height restrictions or a lower-profile aesthetic.

- Low-profile frame for height-restricted sites
- 80 x 80mm zinc-primed steel frame with stainless-steel bars
- Certified to BS EN 16630:2015 for permanently installed outdoor fitness equipment
- Backed by 48-month warranty (10yr HDPE, 15yr structural)