



HUMIE INSTALLATION TIPS

- 1 Make sure you already have an Alert Labs cellular sensor nearby with a green LED indicating that it is connected to a cellular signal. Humie humidity & temperature sensor requires an Alert Labs cellular sensor to connect to the AlertAQ™ platform.

- 2 Pull the tab to activate the batteries.

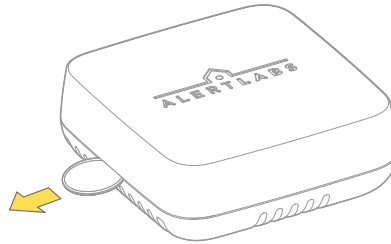


- 3 Confirm LED is blinking green.




- RED - No Signal
- GREEN - Connected
- YELLOW - Low Battery
- MAGENTA - Upgrading

- 4 Place Humie in the desired location. When placing or securing Humie, consider sources of heat gain/loss or other obstructions that may lead to inaccurate readings. Humie can be placed flat on a surface or mounted on the wall using the anchor provided. Humie can also be secured with an Alert Labs mounting bracket (sold separately) to help prevent it from being moved.

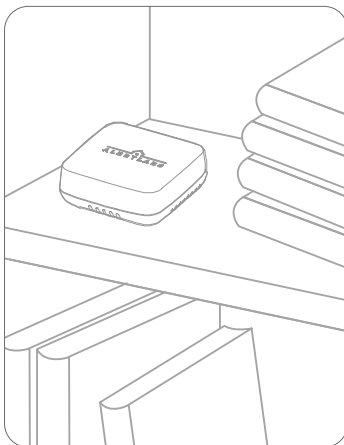

OR

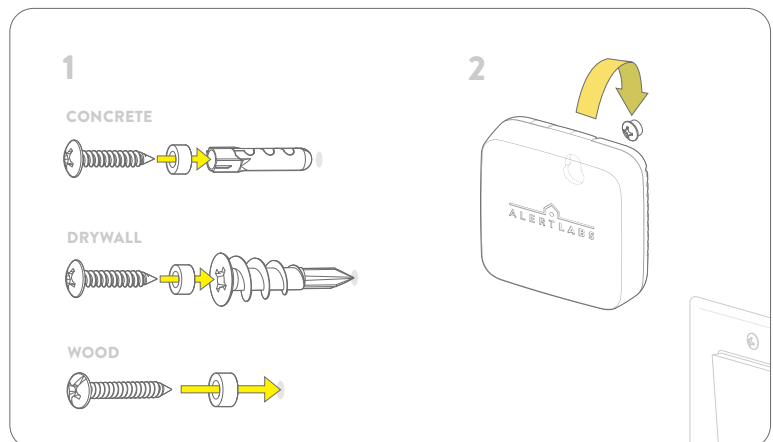

Note: Humie is not waterproof. It is for indoor use only. Keep dry.