





FLOAT SWITCH CABLE


Quick-start Guide

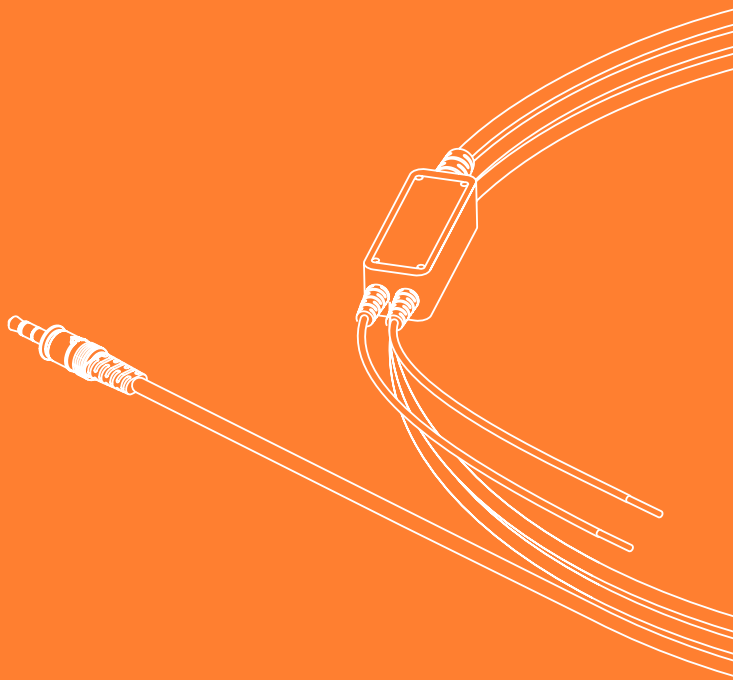




1

Remove the rubber plug from the accessory port on the side of Floodie.



2

Plug the Float Switch Cable into the accessory port.

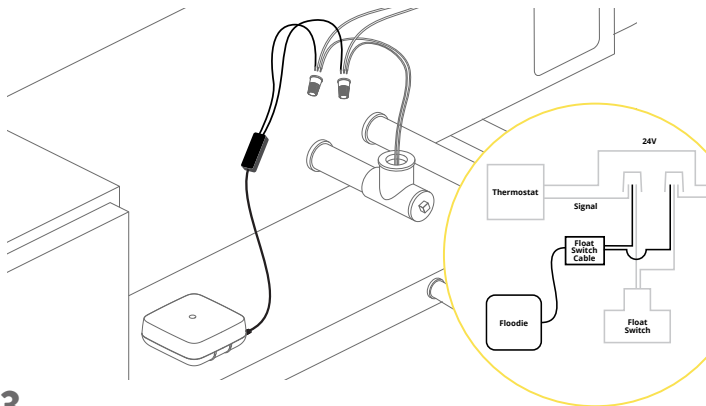

3

Strip and splice the AC unit's float trip wires. Connect the Float Switch Cable onto the float switch wires using the 2 twist on wire connectors. Wire in parallel across float switch.

4

Sign up or log in at app.alertlabs.com. Register the Floodie sensor used with the cable by selecting **➕ Add Sensor** and entering the Floodie serial number.

5

Replace "Flood" alerts with custom text by turning on the **Custom Alert** toggle in **Sensor Settings** or during setup.

Visit alertlabs.com/support for more information.