

# TUNE®

## Quick Start Guide

Scan here to watch a video tutorial on how to set up your camper!



Congrats on your new camper! This Quick Start guide will show you how to easily set up and take down your Tune M1 or M1L, so you can get to camp faster and pack up with confidence. Let's get you adventure ready!

## Opening:

### 1. Unlatch and Enter

- Unlatch all four roof latches.
- Open the rear awning.
- Lower the tailgate and enter the truck bed.




### 2. Lift the Rear Roof

- Place your hands directly on the roof FRP and gently lift the rear of the roof.



### 3. Lift the Front Roof

- Kneel on the bed platform if needed and push up the front of the roof.
- Pro Tip: Push up with your back to get it started.

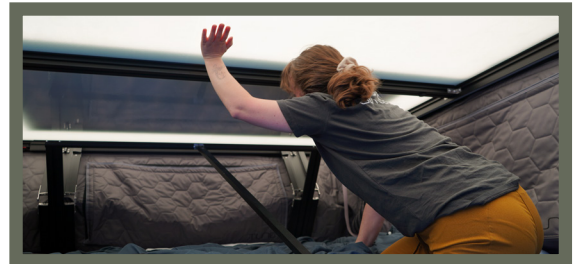

### 4. Engage and Lock

- Make sure all safety plungers are in the unlatched position.
- Engage the front lifting arm rod first, then the rear lifting arm.
- Twist all four safety plungers to the right to lock them.



### 5. Release Fabric

- Unhook the fabric tensioners.
- Your camper is now fully set up and ready to use.



# Closing:

## 1. Unlock and Prep

- Pull up on all four safety plungers and twist left to unlock them.
- Zip up all windows and attach all fabric tensioners. This prevents damage to the fabric and zipper.




## 2. Disengage and Relieve Tension

- Disengage the rear lifting arm first, then the front lifting arm rod.



## 3. Lower the Front

- Place your hip against the bed platform.
- Pull down on the front lifting arm rod while keeping the roof centered with your other hand.
- Once the front is lowered, check outside the camper and tuck in any pinched fabric.

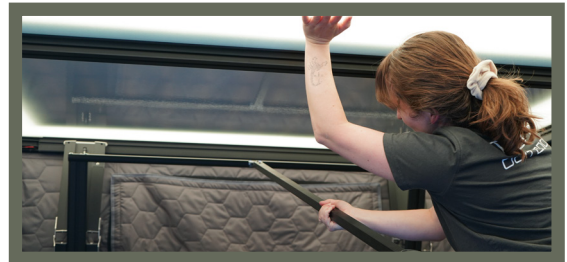

## 4. Lower the Rear

- Using the rear lifting arm, pull the roof down.
- When almost closed, support it with your other hand and lower gently.
- Push up slightly on the lifting arm to correct any misalignment of the roof.



## 5. Final Check and Latch

- Check the rear corners to make sure no fabric is pinched.
- Latch all four roof latches securely.
- Your camper is now fully closed and secured.



### Need help with your build?

Scan here to connect with our Customer Care team:



### Reminders

- The mounting hardware should be inspected after 50 miles, 250 miles, 500 miles, 1,000 miles, and 5,000 miles. After that, it should be checked quarterly throughout the year.
- Always keep your camper doors and the camper itself locked while driving to prevent accidental opening.
- Do not use any harsh chemical cleaners or take your Tune through automatic car washes. We have a cleaning care guide under "owner guides" on our website if you need guidance on cleaning your rig.
- If you have any issues with your build, submit a ticket on our website under "customer care" or give us a call.