



EXO SERIES xLAUNCH

KEY FEATURES

LARGE SURFACE AREA ALLOWS FOR A MULTITUDE OF ITEMS TO BE LAUNCHED

1/4"-20 HOLES ON LAUNCH PAD ALLOW FOR MOUNTING ADDITIONAL ITEMS

MANUAL SHUT-OFF SAFETY VALVE TO DEPRESSURIZE THE RIG

INTEGRATED IN-LINE SAFETY SWITCH TO PREVENT ERRANT SIGNALS FROM CONTROLLER

QUICK CONNECTS FOR EASY SETUP

SUITABLE FOR WET APPLICATIONS

HARDWARE INCLUDED

REMOVABLE LAUNCHPAD

EXTRA LONG BABY PIN (5/8" X 6") FOR FLEXIBLE POSITIONING ON SET

15' RUBBER AIR HOSE WITH FITTINGS

25' CUSTOM CABLE FOR CONNECTING RIG TO YOUR CONTROLLER

CUSTOM STUDIO CRATE SUM

Lorem ipsum

DEEPER SPECS

LAUNCHPAD DIM. 6"x9"

XPUSH DIM. 4.5"x8" WITH 1" AND 3" LIP

Lorem ipsum


PAYLOAD 15 LB

PRESSURE RATING <100 PSI

Lorem ipsum

INPUT VOLTAGE 24V

KIT WIEGHT 25 LB

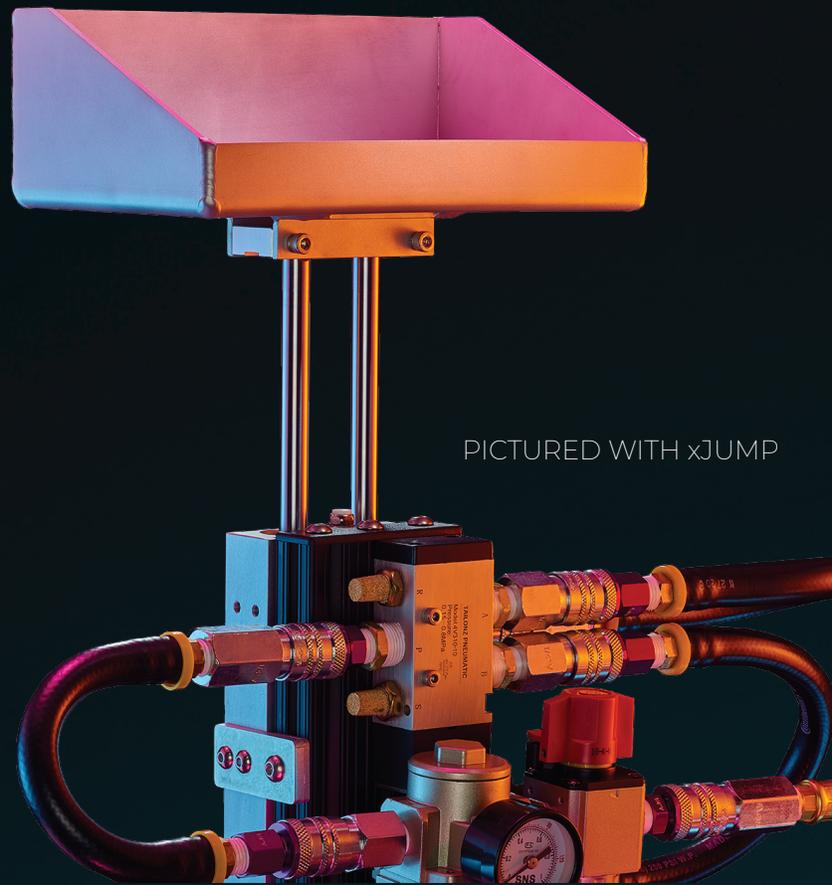

PICTURED WITH xJUMP