



# C20

+ T R A C K

MAX REACH FROM CENTER

6'7"




MAX REACH  
**6'7"**

MAX HEIGHT  
11'4"

MAX SPEED  
**42 FT/S**

**INCLUDED HARDWARE:**

- ROBOT ON BASE SECTION
- CONTROLS CABINET
- FIZ MOTORS
- CAMERA MOUNT
- COMBO CABLE
- REMOVABLE WEIGHTS
- TRACK TOOL KIT
- SISU WAND, TABLET & CASE

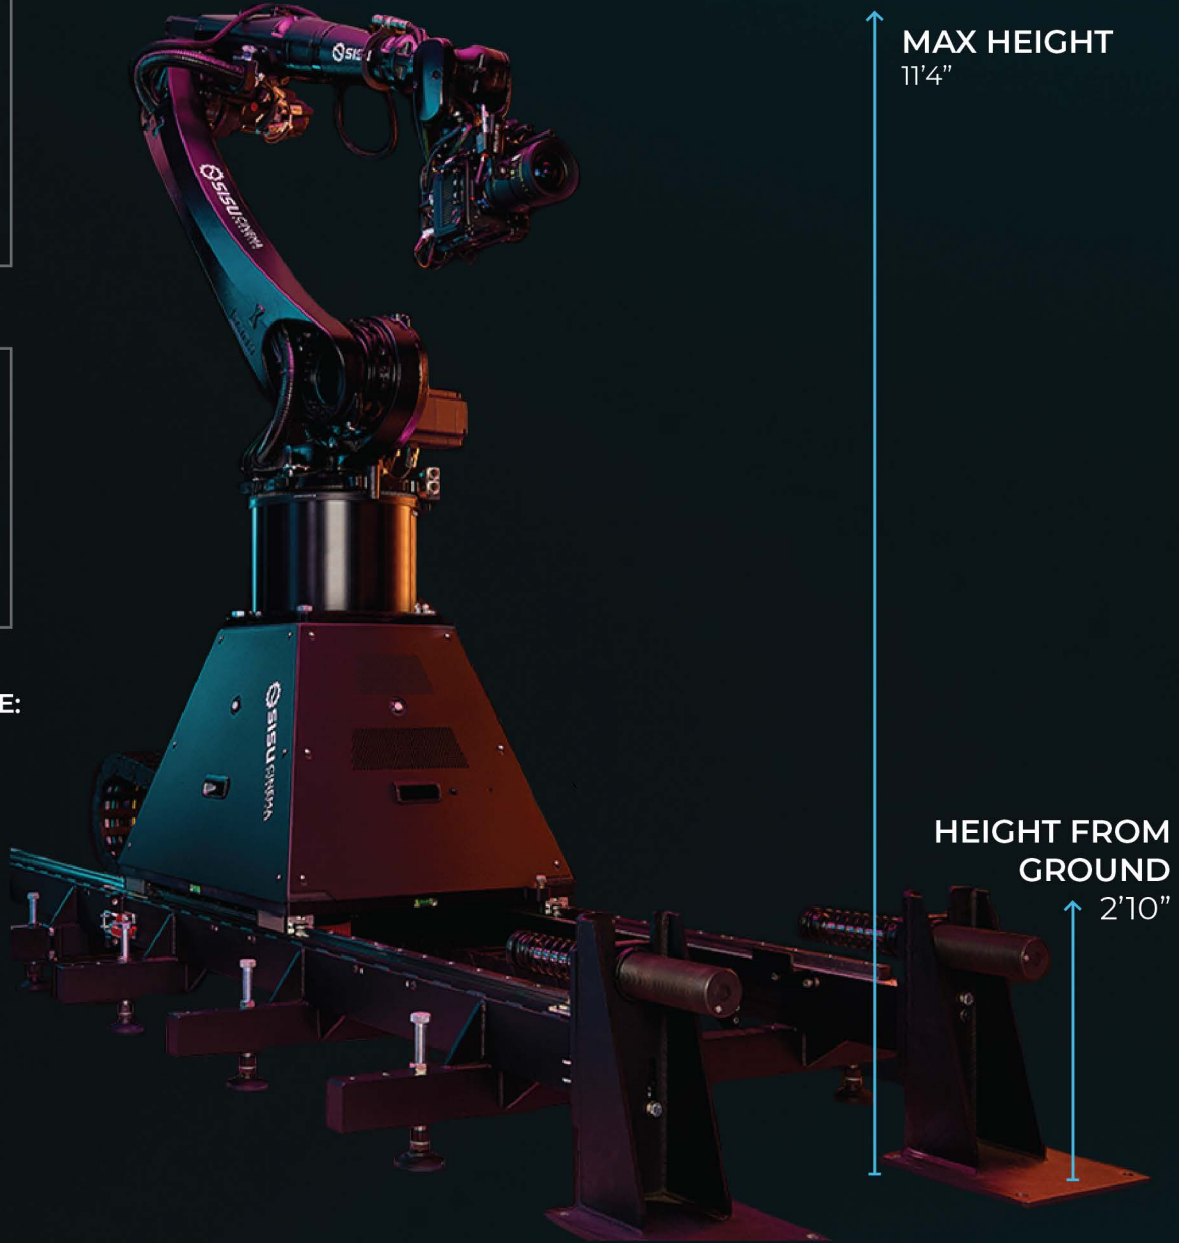

HEIGHT FROM  
GROUND

2'10"

INTUITIVE  
HAND CONTROL



FAMILIAR  
TIMELINE INTERFACE



TARGET  
TRACKING



ARCS &  
ORBITS



VFX  
INTEGRATION



EXTERNAL  
DEVICES



# DEEPER SPECS

## DIMENSIONS

BASE SECTION	6'2" x 3'11"
ADDITIONAL SECTIONS	5'8" x 3'11"
MAX REACH	6'7"
HEIGHT FROM GROUND (to bottom of robot)	2'10"
ADJUSTABILITY OF FEET	3.5in

## SPEEDS

MAX SPEED	42ft/s
-----------	--------

## CABLE LENGTHS

KRC4 to POWER	22'11" / 49'3"
TRACK to KRC4 (dependent on track length)	19'8" / 32'10"

## WEIGHT

MAX PAYLOAD (ROBOT)	42lbs
BASE SECTION WEIGHT (with pedestal without robot)	496lbs
BASE SECTION WEIGHT (with robot)	1091lbs
ADDITIONAL WEIGHT	198lbs
MOBILE PEDESTAL	760lbs
WEIGHT STACKS (optional)	260lbs ea

## POWER

VOLTAGE	480VAC, 3Ø
MAX CURRENT	10A
MAX POWER	8kVA
PLUG TYPE	4W 20A 480V
COMPATIBLE OUTLETS	IEC60309

## ENVIRONMENTAL CONDITIONS

MIN	41F
MAX	113 F
HUMIDITY	non-condensing



# C20

+ T R A C K



**\*\*NOTE:** Running at high speeds and/or accelerations may require bolting to the floor.  
Contact [sales@sisu.us](mailto:sales@sisu.us) for more information. For more detailed specs, see the manual.