



C20

+ T R A C K

MAX REACH FROM CENTER
2.17M




MAX REACH
2.17M

MAX HEIGHT
3.4M

MAX SPEED
6 M/S

INCLUDED HARDWARE:

- ROBOT ON BASE SECTION
- CONTROLS CABINET
- FIZ MOTORS
- CAMERA MOUNT
- COMBO CABLE
- REMOVABLE WEIGHTS
- TRACK TOOL KIT
- SISU WAND, TABLET & CASE

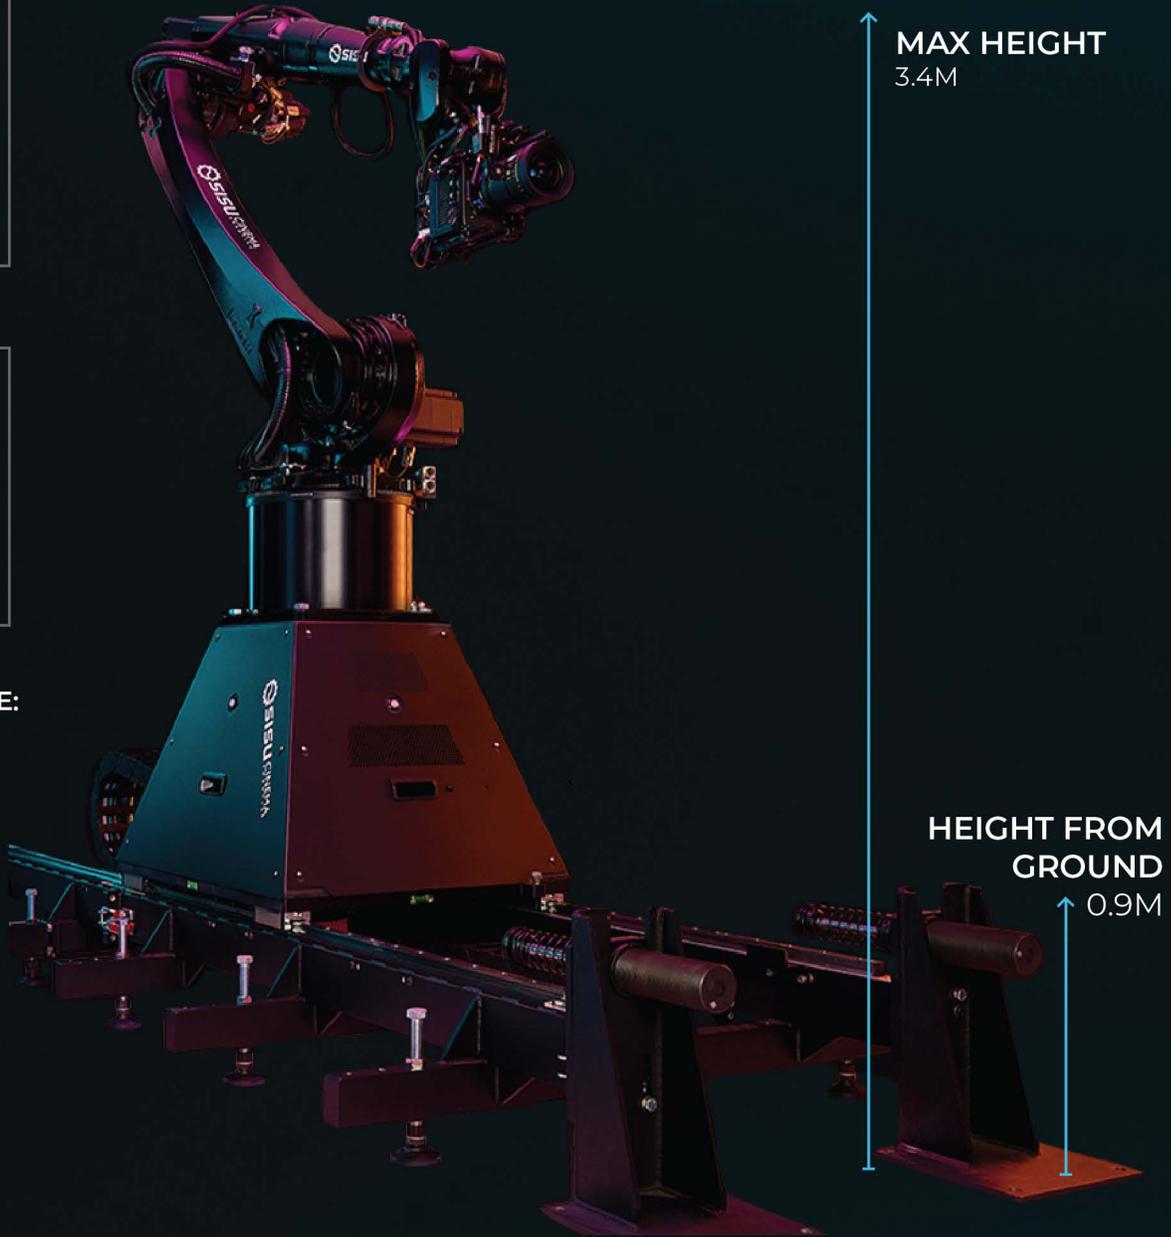

HEIGHT FROM
GROUND
0.9M

INTUITIVE
HAND CONTROL



FAMILIAR
TIMELINE INTERFACE



TARGET
TRACKING



ARCS &
ORBITS



VFX
INTEGRATION



EXTERNAL
DEVICES



DEEPER SPECS

DIMENSIONS

BASE SECTION	1.87m x 1.19m
ADDITIONAL SECTIONS	1.72m x 1.19m
MAX REACH	2.17m
HEIGHT FROM GROUND (to bottom of robot)	0.9m
ADJUSTABILITY OF FEET	8.9cm

SPEEDS

MAX SPEED - 3 SECTIONS	3.82m/s
MAX SPEED - 8 SECTIONS	6m/s

CABLE LENGTHS

KRC4 to POWER	7m or 15m
TRACK to KRC4 (dependent on track length)	6m or 10m

WEIGHT

MAX PAYLOAD (ROBOT)	19kg
BASE SECTION WEIGHT (with pedestal without robot)	225kg
BASE SECTION WEIGHT (with robot)	495kg
ADDITIONAL WEIGHT	90kg
WEIGHT STACKS (optional)	118kg/ea

POWER

VOLTAGE	480VAC, 3Ø
MAX CURRENT	10A
MAX POWER	8kVA
PLUG TYPE	4W 20A 480V plug
COMPATIBLE OUTLETS	IEC60309

ENVIRONMENTAL CONDITIONS

MIN	5 C
MAX	45 C
HUMIDITY	non-condensing



C20

+ T R A C K



****NOTE:** Running at high speeds and/or accelerations may require bolting to the floor. Contact sales@sisu.us for more information. For more detailed specs, see the manual.