


CONTROL4 SMART THERMOSTAT

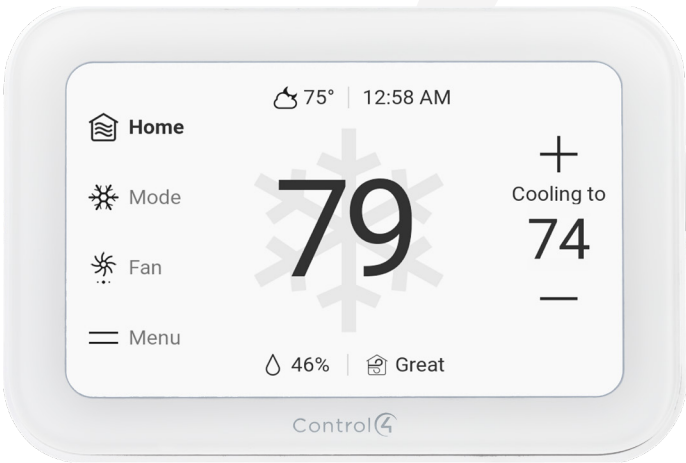

CONTROL4 SMART THERMOSTAT (C4-SMART-THERM)

The Control4 Smart Thermostat delivers comfort control built for a professional smart home experience. With a slim profile, bright 5-inch glass touchscreen, and modern design, it gives integrators a thermostat clients will want to see on the wall. It supports wireless sensor compatibility for more accurate comfort across key rooms, while local operation keeps control available without relying on cloud access. Native Control4 integration and auto-discovery help simplify setup, while thermostat technology engineered with Resideo brings trusted comfort expertise to every project.

Features

- Slim profile with bright 5-inch glass touchscreen
- Wireless and wired sensor compatibility
- Multi-sensor averaging, room prioritization, and occupancy detection for more balanced comfort throughout the home
- Built in air quality monitoring
- Native Control4 integration and SDDP auto-discovery designed to simplify installation
- Local operation with no cloud dependency

Warranty	5-years
Stages	Up to 4 Heat/2 Cool Heat Pump systems; Up to 3 Heat/3 Cool for conventional systems
Wireless Communication	Bluetooth (2.4 GHz), Dual-Band Wi-Fi (2.4 GHz & 5 GHz), Redlink 3.0 communication, Radar: 61.5 GHz
Voltage	24AC (20-30 VAC)
Indoor Sensors Wireless Range	200 ft (60 m)
Outdoor Sensors Wireless Range	200 ft (60 m)
Operating Ambient Temperature	37 to 102 °F (2.8° to 38.9° C)
Shipping Temperature	-20 to 120 °F (28.9 to 48.9 °C)
Operating Relative Humidity	5% to 90% Non Condensing
Setpoint Temperature Range	Heating: 40 to 90 °F (4.5 to 32 °C); Cooling: 50 to 99 °F (10 to 37n °C)
Setpoint Humidification Range	0% to 90% RH.
Setpoint Dehumidification Range	10% to 100% RH.
Humidity Sensor Accuracy	± 5% RH from 30% to 50% RH at 75 F

