


brunner ::

re-wool 2

Group 4

kvadrat


Re-wool

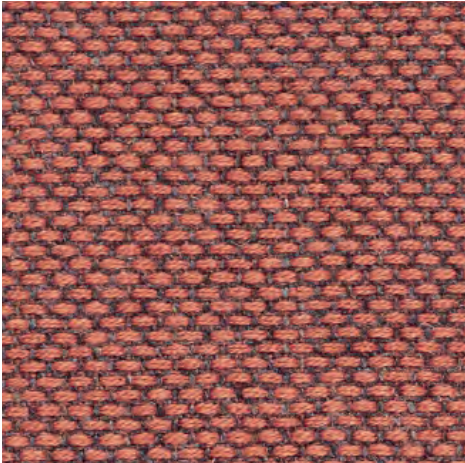


558



648




718




758




768




658




408




458




828




108




448




858




158




128




218



628



868



198



358



378



568

Re-wool

Designed by Margrethe Odgaard

UK

Application Offices, hotels, institutions,
domestic use. Great durability.

Description 45% recycled wool, 45% new wool,
worsted, 10% nylon. Width app. 55 inches (140
cm). Weight app. 540 g/lin.m. Yarn dyed.

Colour differences will occur.

Selvedge ↔

Abrasion: App. 50,000 rubs acc. to the
Martindale method EN ISO 12947.

Lightfastness (ISO) 5-7. Pilling (EN ISO) 4.

Fastness to rubbing (ISO) dry 4-5, wet 4-5.

Sound absorption (EN ISO 354) 0.50/Class D
(flat), 0.75/Class C (waved). Airflow 258 Pa

s/m. Flame resistance: AS/NZS 1530.3. BS 5852

Crib 5 with treatment. BS 5852 ignition source

3. BS 5852 part 1. EN 1021-1/2. IMO FTP Code

2010:Part 8. NF D 60 013. SN 198 898 5.3 with

treatment. UNI 9175 1IM. US Cal. Bull. 117-2013.

ÖNORM B1 / Q1. (Copy of test report

available).

Care Please see the ISO symbols.

GB



10 year
warranty

Quality and environmental system accreditation according to ISO 9001 and ISO 14001.

Contact and further information www.kvadrat.dk