


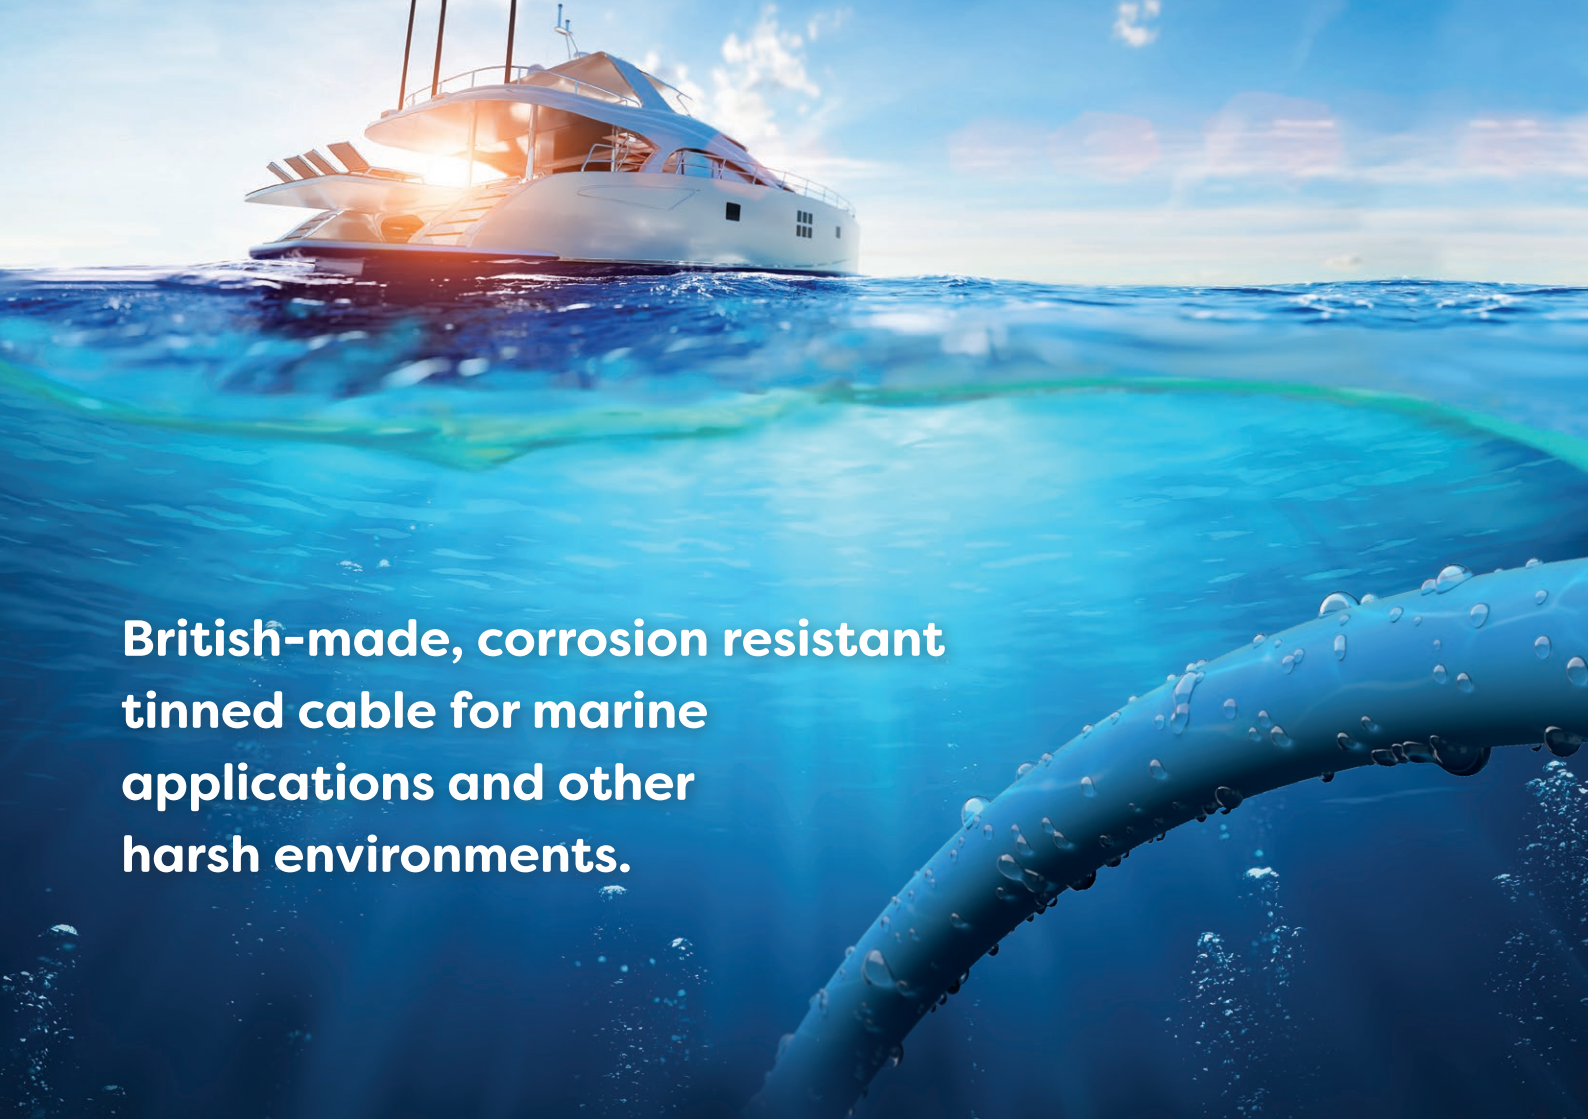


AMC
OCEANFLEX[®]
MARINE CABLES

A white yacht is visible on the ocean surface under a bright sky. Below the waterline, a thick blue cable, covered in water droplets, extends diagonally across the frame. The water is a deep blue with some greenish-yellow patches visible beneath the surface.


**British-made, corrosion resistant
tinned cable for marine
applications and other
harsh environments.**

Our UK-manufactured OceanFlex® cables are designed, built and tested with durability in mind to withstand the rigours of marine and industrial environments. With superior resistance against moisture and corrosion, our high-quality cables offer real flexibility too – with the option of bespoke design and specification in length, colour, and branding.

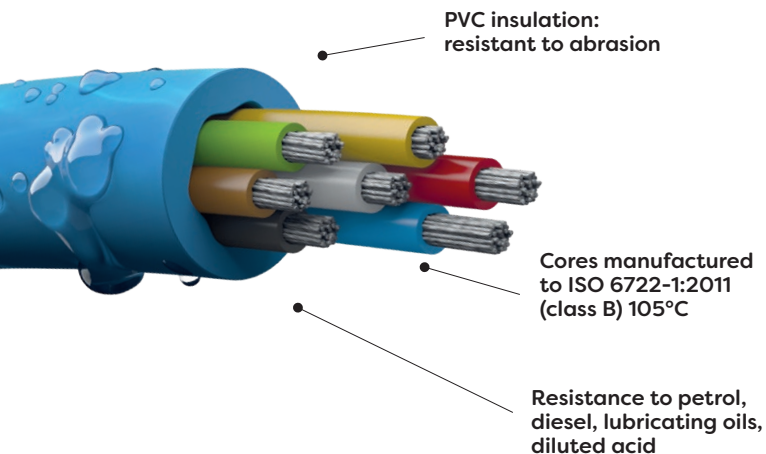


OceanFlex® Tinned Copper cables

High temperature, thin wall, low voltage, wiring cables suitable for use in automotive, marine and other harsh environments. The tinned copper conductors make this cable more resistant to corrosion.

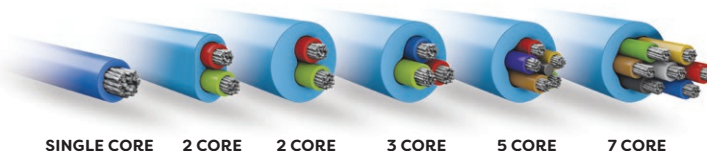

OceanFlex® PVC cables

Single insulated extra flexible battery cables designed for use in tough working environments. Resistant to petrol, lubricating oils and diluted acids. PVC insulated -30° to 70°C.



Cables available

	No of Cores	Cross Section	Specification	Operating Temperature	Sheath Temperature	Type	Sheath Colour	Core Colours	Reel Sizes
OceanFlex Thin Wall Cable (Tinned)	1	1mm ² to 10mm ²	PVC - ISO6722 Class B, IEC60332.1.2 Flame Retardant	-40°C +105°C	n/a	Round	Any*	n/a	50m, 100m, 500m * 10mm ² only available in 30m, 100m reels
	2	1mm ² , 1.5mm ² , 2.5mm ²	PVC - ISO6722 Class B, IEC60332.1.2 Flame Retardant	-40°C +105°C	n/a	Flat	Black	Red, Black	30m, 100m *1.5mm ² Sheath available Black & White
	2	1mm ² , 1.5mm ² , 2.5mm ² , 6mm ²	PVC - ISO6722 Class B, IEC60332.1.2 Flame Retardant	-40°C +105°C	-30°C +70°C	Round	Black	Red, Black	30m, 100m
	3	1mm ² , 1.5mm ² , 2.5mm ² , 4mm ² , 6mm ²	PVC - ISO6722 Class B, IEC60332.1.2 Flame Retardant	-40°C +105°C	-30°C +70°C	Round	Black	Red, Black, Green	30m, 100m *1.5mm ² Black, White, 6mm ² & 10mm ² Yellow
	5	1.5mm ² , 2.5mm ²	PVC - ISO6722 Class B, IEC60332.1.2 Flame Retardant	-40°C +105°C	-30°C +70°C	Round	Black	Brown, Red, Green, White, Yellow	30m, 100m
	7	1.5mm ² , 2.5mm ²	PVC - ISO6722 Class B, IEC60332.1.2 Flame Retardant	-40°C +105°C	-30°C +70°C	Round	Black	Brown, Red, Green, White, Yellow, Black, Blue	30m, 100m
	8	7x1mm ² + 1x2mm ²	PVC - ISO6722 Class B, IEC60332.1.2 Flame Retardant	-40°C +105°C	-30°C +70°C	Round	Black	Black, Red, Blue, Yellow, Purple, Brown, White, Green	50m, 100m
	10	9x1mm ² + 1x2mm ²	PVC - ISO6722 Class B, IEC60332.1.2 Flame Retardant	-40°C +105°C	-30°C +70°C	Round	Black	Black, Red, Green, Grey, Blue, Yellow, Brown, Orange, Purple, White	50m, 100m
	13	12x1.5mm ² + 1x2.5mm ²	PVC - ISO6722 Class B, IEC60332.1.2 Flame Retardant	-40°C +105°C	-30°C +70°C	Round	Black	Yellow, Blue, Green, Brown, Red/Black, Black, Red, Pink, Purple, Grey, White, Light Brown, Orange	50m, 100m
OceanFlex Extra Flexible Battery Cable (Tinned)	No of Cores	Cross Section	Specification	Operating Temperature	Sheath Temperature	Type	Sheath Colour	Core Colours	Reel Sizes
	1	16mm ² to 95mm ²	PVC - EN60228, IEC60332.1.2	-15°C +70°C	n/a	Round	Black, Red	n/a	10m, 50m *70mm ² & 95mm ² available in 10m, 30m & 50m
	1	16mm ² to 95mm ²	PVC - ISO13297 standard, IEC60332.1.2	-15°C +70°C	n/a	Round	Yellow	n/a	10m, 50m *70mm ² & 95mm ² available in 10m, 30m & 50m

Data Sheets available at www.amc-tcg.com/downloads/data-sheets
Contact your retailer for more information.