

AMC
AUTOMOTIVE



AMC

AUTO-CLASSIC

AMC
We simply connect

Classic PVC Low Voltage Cables

General purpose low voltage wiring cables suitable for use in the automotive, marine and allied industries.

AMC


AUTO-CLASSIC

Single or multi core construction, available in solid or bi-colour options with standard wall thickness. With good resistance to petrol, diesel, lubricating oils and diluted acids, these cables are used to replace automotive wiring pre-1995.

Manufactured to BS6862 Part 1 1971 – the authentic choice for classic and vintage vehicle restoration, rewiring and replacement harnesses.

Specifications

- Cores manufactured to BS6862 Part 1 1971, where applicable
- Plain copper conductors, PVC insulated
- Suitable for use at temperatures from -30°C to 70°C
- Twins and multicore PVC sheathed at 70°C
- Suitable for 12v and 24v systems (maximum 100v)
- Resistant to petrol, diesel, lubricating oils and diluted acids
- Bespoke core and sheathing colours available on singles, twins, multicore and speaker cable (subject to MOQs)

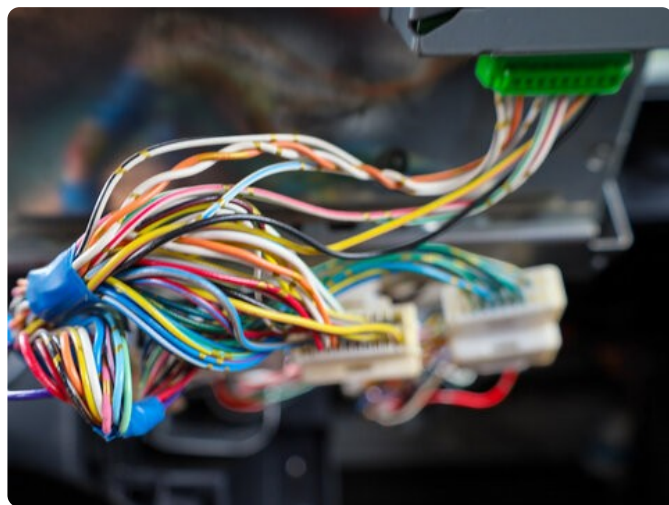

Auto-Classic Range

Single and multi-core, standard wall – cores and sheaths in any colour (MOQs may apply).

SINGLE CORE

2 CORE

3 CORE

4 CORE

5 CORE

7 CORE

PVC Single Core Auto Cables



Part No	Conductor (mm)	Cross Section (mm ²)	Max Overall Ø (mm)	Current Rating (A)	Max Load 12V (W)	Max Load 24V (W)	Max Resistance /m at 20°C (Ω)	Reel (m)
1598	9/0.30	0.65	2.5	5.75	69	138	0.0294	50
1600	14/0.30	1.0	2.7	8.75	105	210	0.0189	50
1603	28/0.30	2.0	3.4	17.5	210	420	0.0094	50
1605	44/0.30	3.0	4.2	27.5	330	660	0.006	50
1606	65/0.30	4.5	5.1	35.0	420	840	0.0041	30

PVC Multi-Core Auto Cables

Sheathed at 70°C. Refer to single core for resistance values.



Part No	Conductor (mm)	Cross Section (mm ²)	Max Overall (mm)	Current Rating (A)	Sheath	Reel (m)
2 Core Flat Twin Core colours: Black, Red						
1649	2 × 9/0.30	2 × 0.65	6.00 × 3.55	5.75	Black	30, 100
1650	2 × 14/0.30	2 × 1.0	6.50 × 3.85	8.75	Black	30, 100
1652	2 × 28/0.30	2 × 2.0	7.55 × 4.35	17.5	Black	30, 100
3 Core Core colours: Black, Green, Red						
948	3 × 14/0.30	3 × 1.0	7.5	8.75	Black	30, 100
4 Core Core colours: Brown, Green, Red, White						
960	4 × 14/0.30	4 × 1.0	8.0	8.75	Black	30, 100
5 Core Core colours: Brown, Green, Red, White, Yellow						
951	5 × 9/0.30	5 × 0.65	8.3	5.75	Black	30, 100
998	5 × 14/0.30	5 × 1.0	8.9	8.75	Black	30, 100
7 Core Core colours: Black, Red, Green, Yellow, Brown, White, Blue						
953	7 × 16/0.20	7 × 0.5	8.4	4.25	Black	30, 100
952	7 × 9/0.30	7 × 0.65	8.9	5.75	Black	30, 100
999	6 × 14/0.30 + 1 × 28/0.30 (W)	6 × 1.0 + 1 × 2.0	10.2	6 × 8.75 / 1 × 17.5	Black	30, 100

The cores and sheaths can be produced in any colour (MOQs may apply).

The conductor specifications shown are representative configurations; actual cable strand may differ slightly, but will meet resistance values shown.

Nominal current amperage ratings are provided as a guide only, and can vary depending on application, conditions and environmental factors. If in doubt, please consult a qualified electrician.



British-made classic PVC cable for pre-1995 vehicle wiring.

Our UK-manufactured Auto-Classic cables are made to BS6862 Part 1 1971 with standard wall thickness – ideal for restoring and replacing classic vehicle wiring, with bespoke core and sheathing colours available on singles, twins and multicores (subject to MOQs).