


# Century 19 No. 10 – Camo

Copper-Clad Steel (CCS) Grounding Conductor

**PART #: Q6C19X10A-CAMO**

## Engineering Specifications:

- **Strands** – 19
- **Composition** – Grade 40 DSA (steel core)
- **Finish** – Camo
- **Standards** – ASTM B-910, ASTM B-228

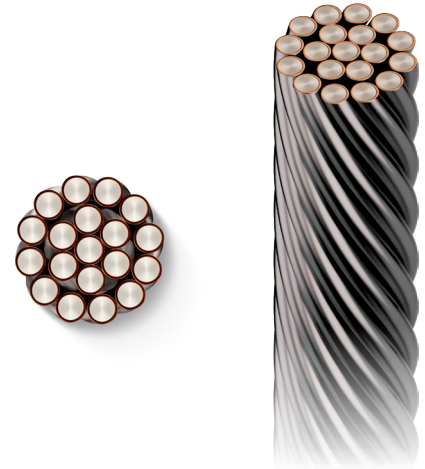

Current Carrying Capabilities*	Up to 100 ms (6 Cycles)	Up to 250 ms (15 Cycles)	Up to 500 ms (30 Cycles)	Up to 1.0 s (60 Cycles)	Up to 3.0 s (180 Cycles)	Thermal Energy (I <sup>2</sup> T)
Short Time Fusing Limit	59.9 kA	39.4 kA	28.4 kA	20.3 kA	11.8 kA	403

Specifications	Imperial	Metric
Strand Diameter	0.1019 in	2.59 mm
Nom. Overall Diameter	0.510 in	12.94 mm
Area	197.3 kcmil	100.0 mm <sup>2</sup>
Weight	561 lb/kft	835 kg/km
Max. Wire Resistance	0.1401 Ω/kft	0.0427 Ω/km
Min. Break Load	7,421 lbf	3,366 kgf

\* Short circuit current (kA) values are based on IEEE 80:2013, Table 6 (RMS currents, 60 Hz, X/R = 0). Fusing temps at 1084 °C. Century Grid® products exceed industry performance standards due to design, materials, and improved thermal characteristics. All current carrying capabilities for Century products are reflected in commercially available industry standard software programs for substation and transmission line designs. Contact your local sales representative for details.



Copperweld bimetals have been processed in the USA for over 100 years. We use the world's highest-quality steel and oxygen-free copper to provide superior protection and unmatched durability.



615-377-4200  
powergrid@copperweld.com