


Type MC AGP Armored Cable



600V | Metal-Clad Cable with Armor as a Component of the Ground Path

Engineering Specifications:

- **Standards:** UL 83, UL 1569, UL 1581, UL 2556, ASTM B566, ASTM B800
- **Listings and Compliance:** UL: E510284, E523379, and E538020; RoHS Compliant; REACH Compliant
- **Construction:**
 - **Conductors** – UL recognized component (DVVV2); sizes 12-10 AWG: solid, annealed THHN/THWN-2 Copper-Clad Aluminum (CCA); sizes 8 AWG and larger: stranded, annealed THHN/THWN-2 CCA
 - **Conductor Insulation** – Color-coded Polyvinyl Chloride (PVC) compound meeting the required thickness of Type THHN/THWN-2 with a heat-stabilized nylon jacket
 - **Grounding** – Aluminum series 8000 bonding conductor to provide grounding/bonding path
 - **Metal Clad Armor** – Lightweight aluminum interlocking armor

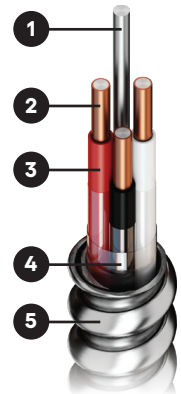

- 1 Aluminum bonding conductor
- 2 Copperweld CCA conductor
- 3 THHN / THWN insulation
- 4 Separator tape
- 5 Interlocking aluminum armor

Identification and Applications:

- **Identification:** Copperweld® MC AGP cable is identified for use with wiring devices, splice connectors and equipment terminals rated for CC, Cu, Cu/Al and CO/ALR. Copperweld® Copper-Clad Aluminum is not dissimilar metallurgically to copper, brass or zincplated steel. If splicing with twist-on splice connectors, pre-twisting is not required. Copperweld® MC AGP Cable is made with ASTM B566 Copper-Clad Aluminum bare wire, which carries its own component listing, DVVV2, and is an NEC requirement.
- **Applications:** Refer to Article 250.118 of the NEC for installations where armor is allowed as a component of the ground path.

CCA Size (AWG)	No. of Strands	Solid Alum. Bonding Cond. Size	Outside Diameter (in)	Approx. Weight (lbs/1000 ft)	CCA Allowable Amperage*	
					75° C	90° C
12/2	Solid	12	0.45	75.2	20	25
12/3	Solid	12	0.47	89.5	20	25
12/4	Solid	12	0.51	104.7	20	25
10/2	Solid	10	0.51	95.1	30	35
10/3	Solid	10	0.55	116.2	30	35
10/4	Solid	10	0.59	139.2	30	35
10/2	7	10	0.54	98.8	30	35
10/3	7	10	0.57	121.3	30	35
10/4	7	10	0.62	144.6	30	35
8/2	7	8	0.64	139.0	40	45
8/3	7	8	0.69	174.1	40	45

* Ampacity of conductors are based on the Copper-Clad Aluminum columns of NFPA 70 (NEC 2026) Table 310.16 and in accordance with section 330.80. See sections 110.14 and 240.4(D) for specific sizing limitations based upon electrical connection temperature ratings and circuit-size over-current protection values.



615-377-4200
buildingwire@copperweld.com



Type MC AGP Armored Cable



600V | Metal-Clad Cable with Armor as a Component of the Ground Path

Ordering Information:

CCA Size	No. of Strands	Conductor Color Sequence*	Standard Packaging**	Part Number***
12/2	Solid	BK, WT	250' or 1000'	12/2MCAGP-1/1-CCA-A-[Ft]-[Pkg]
12/3	Solid	BK, WT, RD	250' or 1000'	12/3MCAGP-1/1-CCA-A-[Ft]-[Pkg]
12/4	Solid	BK, WT, RD, BL	250' or 1000'	12/4MCAGP-1/1-CCA-A-[Ft]-[Pkg]
10/2	Solid	BK, WT	250' or 1000'	10/2MCAGP-1/1-CCA-A-[Ft]-[Pkg]
10/3	Solid	BK, WT, RD	250' or 1000'	10/3MCAGP-1/1-CCA-A-[Ft]-[Pkg]
10/4	Solid	BK, WT, RD, BL	250' or 1000'	10/4MCAGP-1/1-CCA-A-[Ft]-[Pkg]
10/2	7	BK, WT	250' or 1000'	10/2MCAGP-7/1-CCA-A-[Ft]-[Pkg]
10/3	7	BK, WT, RD	250' or 1000'	10/3MCAGP-7/1-CCA-A-[Ft]-[Pkg]
10/4	7	BK, WT, RD, BL	250' or 1000'	10/4MCAGP-7/1-CCA-A-[Ft]-[Pkg]
8/2	7	BK, WT	1000'	8/2MCAGP-7/1-CCA-A-[Ft]-[Pkg]
8/3	7	BK, WT, RD	1000'	8/3MCAGP-7/1-CCA-A-[Ft]-[Pkg]

* Insulation colors: Black (BK), White (WT), Red (RD), Blue (BL), Green (GR) unless otherwise noted. Other color combinations are available on request, including standard 480V colors.

** Packaging: Other packaging and denomination options are available on request.

*** Part Number Legend: [Size/# of Circuit Cond.][Type]-[# of Strands Circuit Cond. / Ground Cond.]-CCA-A-[Length in Feet]-[Packaging]

- Standard Packaging [Pkg]: Hand Coils [C], Plastic Spools or Wooden Reels [RL]



615-377-4200
buildingwire@copperweld.com

