


Century 19 x 0750

Copper-Clad Steel (CCS) Grounding Conductor

PART #: Q6C19X0750A

Engineering Specifications:

- **Strands** – 19
- **Composition** – Grade 40 DSA (steel core)
- **Finish** – Bare
- **Standards** – ASTM B-910, ASTM B-228

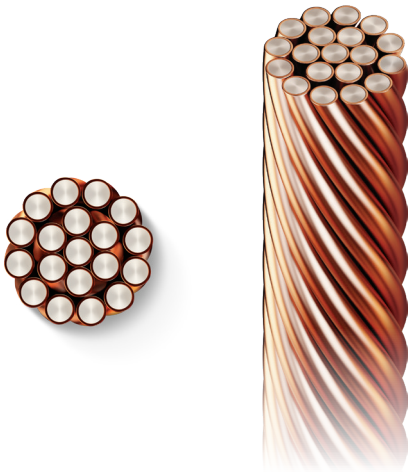

Current Carrying Capabilities*	Up to 100 ms (6 Cycles)	Up to 250 ms (15 Cycles)	Up to 500 ms (30 Cycles)	Up to 1.0 s (60 Cycles)	Up to 3.0 s (180 Cycles)	Thermal Energy (I²T)
Short Time Fusing Limit	33.3 kA	21.7 kA	15.5 kA	11.0 kA	6.4 kA	120

Specifications	Imperial	Metric
Strand Diameter	0.0750 in	1.91 mm
Nom. Overall Diameter	0.375 in	9.53 mm
Area	106.9 kcmil	54.2 mm²
Weight	304 lb/kft	452 kg/km
Max. Wire Resistance	0.2560 Ω/kft	0.0780 Ω/km
Min. Break Load	4,257 lbf	1,931 kgf

* Short circuit current (kA) values are based on IEEE 80:2013, Table 6 (RMS currents, 60 Hz, X/R = 0). Fusing temps at 1084 °C. Century Grid® products exceed industry performance standards due to design, materials, and improved thermal characteristics. All current carrying capabilities for Century products are reflected in commercially available industry standard software programs for substation and transmission line designs. Contact your local sales representative for details.



Made in
USA

Copperweld bimetals have been processed in the USA for over 100 years. We use the world's highest-quality steel and oxygen-free copper to provide superior protection and unmatched durability.



COPPERWELD®
BRAND WIRE

615-377-4200
powergrid@copperweld.com