



## Natural Gas Generator Datasheet

CS RANGE

**JEG60CS-NG: 60/66 kVA**

## Technical Data

## JEG60CS-NG

| Engine  | Model  | Phase | Type     | Jubilee Model |
|---------|--------|-------|----------|---------------|
| Cummins | 6BT5.9 | Three | Enclosed | JEG60CS-NG    |

| RATINGS | PRIME POWER (PRP) |     |      | STANDBY POWER (ESP) |     |      |
|---------|-------------------|-----|------|---------------------|-----|------|
| Voltage | kVA               | kWe | Amps | kVA                 | kWe | Amps |
| 380     | 60                | 48  | 91   | 66                  | 53  | 100  |
| 400     | 60                | 48  | 87   | 66                  | 53  | 95   |
| 415     | 60                | 48  | 83   | 66                  | 53  | 92   |
| 440     | 60                | 48  | 79   | 66                  | 53  | 87   |

### Power Definition

**Prime Power (PRP)** is the power continuously available at variable load in lieu of mains power. An overload of 10% is permitted for one hour in every 12 hours of operation.

**Standby Power (ESP)** is the maximum output available for up to a maximum of 500 hours per year. No overload is permitted.

**Standard Conditions:** air inlet temperature of 40°C, barometric pressure of 100 kPa (110 m.a.s.l.) relative humidity of 30%.

**Note:** All ratings data based on operation under ISO 8528-1 and ISO 3046-1. The above ratings may be subject to deration at different ambient temperatures or site altitude conditions.

### Scope of Supply


- Water cooled Cummins engine
- Single bearing Stamford alternator
- Set mounted Radiator with coolant expansion bottle
- Fully guarded engine-driven fan
- Gas Train with AGA approved componentry
- Heavy duty rubber anti-vibration mounts
- 24V starter batteries, tray and connecting cables
- Battery Charger and Battery Isolator switch
- Spin on Oil filters and dry type Air filter
- DSE7420 AMF Controller with protections
- Schneider 4P NSX range Adjustable Circuit Breaker
- Emergency Stop push buttons
- Sound attenuated canopy with centre lift / fork slots
- Internal Lighting
- Industrial silencer with rain flap
- Pre-delivery service
- Operation Manual
- Factory Test Certificate



Images are for illustrative purposes only and may vary.

### Typical Enclosed Generator Sound Pressure Level in Free Field Conditions

|            |    |            |    |
|------------|----|------------|----|
| dB(A) @ 1m | 81 | dB(A) @ 7m | 75 |
|------------|----|------------|----|

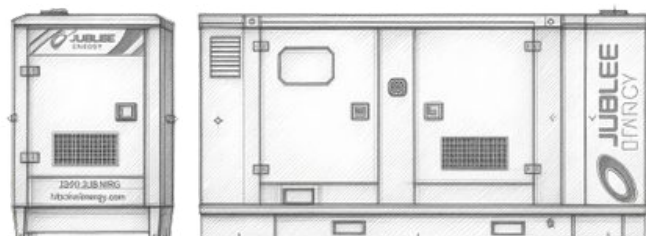

### Weights and Dimensions

|                   |                |         |
|-------------------|----------------|---------|
| Length            | (L)            | 3200 mm |
| Width             | (W)            | 1260 mm |
| Height            | (H)            | 1750 mm |
| <b>Dry Weight</b> | <b>2100 kg</b> |         |

## Engine & Cooling Technical Data

JEG60CS-NG

| DESCRIPTION |                                                  | VALUE         | UNITS      |
|-------------|--------------------------------------------------|---------------|------------|
| GENERAL     | Engine Speed                                     | 1500          | rpm        |
|             | Idling Speed                                     | 700           | rpm        |
|             | Number of Cylinders                              | 6             | Inline     |
|             | Aspiration                                       | Natural       |            |
|             | Thermal Output @ Prime Rating                    | 86            | kW         |
|             | Bore / Stroke                                    | 102 / 120     | mm         |
|             | Displacement                                     | 5.9           | litres     |
|             | Ignition Order                                   | 1 - 3 - 4 - 2 |            |
|             | Governor                                         | Electronic    |            |
| FUEL        | Gas Type                                         | Natural       |            |
|             | Methane Content                                  | >75%          | CH4        |
|             | Gas Consumption at 100% Power                    | 16.6          | Nm3/hr     |
|             | Mixer / Vaporiser                                | IMPCO         |            |
|             | Gas Pressure Needed at Regulator                 | 2.75 - 5      | kPa        |
| AIR         | Max Air Intake Restriction (Clean Filter)        | 2.48          | kPa        |
|             | Max Air Intake Restriction (Contaminated Filter) | 6.21          | kPa        |
|             | Engine Air Intake Flow                           | 108           | litres/sec |
| EXHAUST     | Exhaust Gas Flow                                 | 293           | litres/sec |
|             | Exhaust Gas Temperature                          | 495           | °C         |
|             | Maximum Exhaust Back Pressure                    | 10            | kPa        |
| COOLING     | Maximum Restriction to Cooling Air Flow          | 6.21          | kPa        |
|             | Maximum Coolant Temperature                      | 104           | °C         |
|             | Coolant Flow                                     | 2             | litres/sec |
|             | Coolant Capacity (Engine and Radiator)           | 35            | litres     |
|             | Thermostat Adjusting Temperature Range           | 82 - 95       | °C         |
| OIL         | Total Oil Capacity                               | 16.4          | litres     |
|             | Typical Oil Consumption                          | ≤1.6          | kPa        |
|             | Recommended Oil                                  | SAE 15W / 40  |            |
| ELEC        | Electrical System Voltage                        | 24            | V          |
|             | Battery Type                                     | SLA           |            |
|             | Battery Capacity CCA                             | 60            | A          |

## Alternator Technical Data

JEG60CS-NG


| DESCRIPTION |                       | VALUE                          |
|-------------|-----------------------|--------------------------------|
| GENERAL     | Operating Temperature | 40 °C                          |
|             | Coupling              | Direct                         |
|             | Number of Bearings    | Single                         |
|             | Phase / Poles         | 3 Phase / 4 Pole / Winding 311 |
|             | Power Factor          | Cos $\phi$ = 0.8               |
|             | Excitation            | Self Excited                   |
|             | Insulation System     | Class H                        |
|             | AVR Type              | PMG                            |
|             | Voltage Regulation    | ± 1%                           |

## Controller Options

## JEG60CS-NG



| DSE4510                                                                             | AUTO START CONTROL MODULE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <p>The DSE4510 is an Auto Start Control Module suitable for a wide variety of single genset applications. Whilst maintaining functions included within higher end controllers, such as generator or load power monitoring, this compact controller provides the user with the ultimate size to feature ratio. Monitoring engine speed, oil pressure, coolant temperature, frequency, voltage, current, power and fuel level, the modules will give comprehensive engine and alternator protection.</p>                               |
| DSE6020 MKII                                                                        | AUTO MAINS FAILURE CONTROL MODULE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|   | <p>The DSE6120 MKIII is an Auto Mains (Utility) Failure Control Module suitable for a wide variety of single, diesel or gas, genset applications. Monitoring an extensive number of engine parameters, the module will display warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LEDs and remote PC.</p>                                                                                                                                                                                      |
| DSE7420 MKII                                                                        | AUTO MAINS FAILURE CONTROL MODULE (STANDARD FITMENT)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|  | <p>The DSE7420 MKII is an Auto Mains (Utility) Failure Control Module suitable for a wide variety of single, diesel or gas, gen-set applications. Monitoring an extensive number of engine parameters, the modules will display warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LEDs and remote PC. The DSE7420 MKII will also monitor the mains (utility) supply. The module include USB, RS232, RS485 and Ethernet ports as well as dedicated DSENet® terminals for system expansion.</p> |
| DSE8610                                                                             | AMF/ SYNCHRONISING / LOAD SHARE / SET TO SET                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|   | <p>The DSE8610 is an easy to use multi-generator loadshare system, designed to synchronise up to 32 generators including electronic and non-electronic engines. The DSE8610 monitors the generator and indicates operational status and fault conditions, automatically starting or stopping the engine on load demand or fault condition.</p>                                                                                                                                                                                       |
| DSE8620 MKII                                                                        | AMF/ SYNCHRONISING / LOAD SHARE / SET TO MAINS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|   | <p>The DSE8620 MKII represents the latest in complex load sharing &amp; synchronising control technology. Designed to synchronise a single genset with a mains (utility) supply, the DSE8620 MKII control module is packed with multiple features and benefits that are unrivalled across the generator control industry.</p>                                                                                                                                                                                                        |

## Generator Indicator Panel

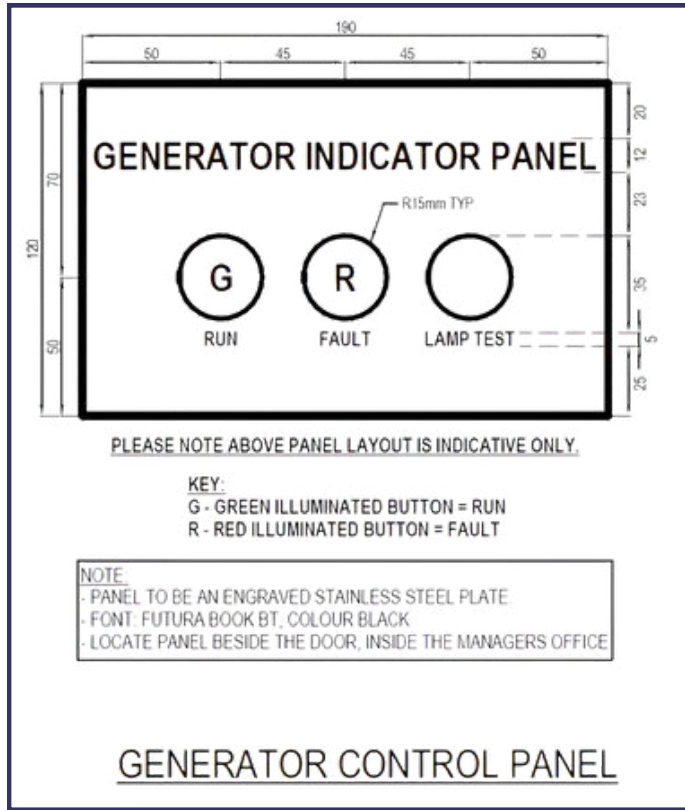

## Other Options

## JEG60CS-NG
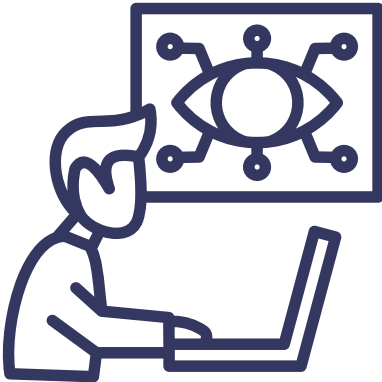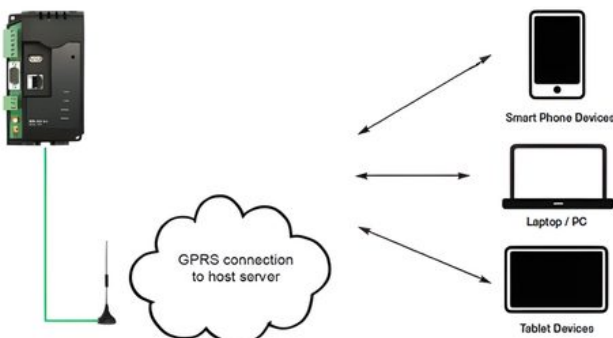
| Remote Monitoring                                                                                                                                                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>The DSEWebNet Gateway Modules are used in conjunction with supported DSE controllers to provide monitoring and communications data via the DSEWebNet® advanced communications system. Gateway modules available are the DSE890 (3G/GSM/GPS/Ethernet), DSE891 (Ethernet only) and DSE892 (SNMP). The Gateway communicates to the connected DSE controller(s), monitoring the instrumentation and operating state. When this data changes, the new data is logged in the internal memory. At regular intervals the logged data is transmitted to the DSE host server. The DSE host server is then integrated into the DSEWebNet® which can be accessed via an internet connected device and web browser to allow remote monitoring and control of multiple DSE controllers around the globe. GSM, GPS and GSM/GPS antennas are available as accessories.</p> |
|   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

| Automatic Transfer Switch                                                           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p>Jubilee Transfer Switches combine reliability and flexibility in a small, economical package for transferring loads between a utility and a generator set, or between two generators. Jubilee Transfer Switches and the control mechanisms are mounted in a key-locking enclosure. Enclosures meet IEC 60947-6-1 standard. Our 63-630 Amp switches are front-connected. The microprocessor control monitors the utility and the standby generator power. When utility power fails, or is unsatisfactory, the control starts the generator. When stable utility power returns, the switch automatically transfers the load back to the utility. A variety of Transfer Switches are available to suit multiple applications.</p> |

All specifications are subject to change without prior notice

V26.05