



AT5

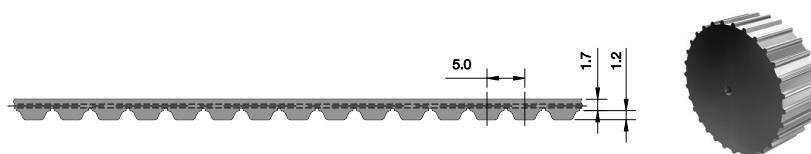

Open-Ended "M"

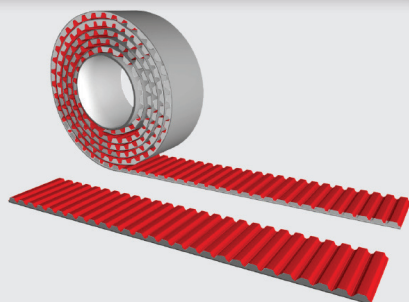

Specifications

Widths (mm) In between widths available	16	25	32	50
Lengths	Stock Rolls of 50m or 100m			
Material	TPUST1			
Belt Color	Red/White Laminate			
Tension Members	move high strength steel			

NOTE: For standard lengths please contact customer service at 732-460-9500

AT5**move** Belt "M" Specifications

Construction	Tension member	Parameter	Belt Width (mm)			
			16	25	32	50
Open Ended "M"	AT5 move steel	Max. Allowable Tensile Strength	2,744	4,116	5,488	8,232
		Specific Stiffness C_{spez} [N]	0.546 E6	0.863 E6	1.092 E6	1.736 E6
		Belt Mass [kg/m]	0.07	0.107	0.14	0.214

Minimum Number of Pulley Teeth and Idler Diameter

Pitch (mm)	Min. # of Pulley Teeth (no back bending)	Min. # of Pulley Teeth (with back bending)	Min. Diameter of Flat Idler running on tooth side (mm)	Min. Diameter of Flat Idler running on belt back (mm)
AT5	20	30	25	60