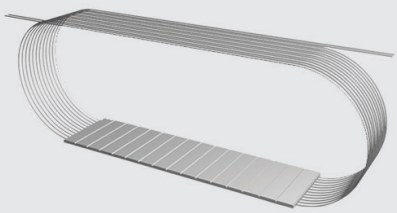




Truly Endless "BFX"



Specifications

Widths (inches) In between widths available	16	25	32	50	75	100
Lengths	Additional lengths available up to 30,000mm. In between lengths available starting at a minimum length of 1,700mm.					
Available Options	Nylon coating grooved side (PAZ)					
Tension Member Options	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel					

Specifications

Timing Belt	Pitch (mm)	Code	Ultimate Tensile Strength (N/10mm belt width)	Maximum Allowable Tensile Strength (N/10mm belt width)	Specific Belt Stiffness Steel Reinforced (Per unit width/length)	Specific Belt Mass (per 10mm belt width, steel reinforced)	Min. # of Teeth on Pulley / Flat Idler Min. Ø no back bending 	Min. # of Teeth on Pulley / Flat Idler Min. Ø with back bending 
Flat Belt Series	**F2.2**	BFX	6400	1400	3.50 x 10^5 N	0.037 kg/m	- / 60mm	- / 120mm

Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]

75 F2.2 / 5000 BFX