
F3.0

M / V Flat Belt-SERIES



Open-Ended "M"

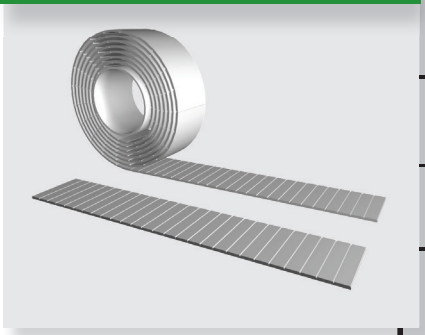


Specifications			
Widths (mm) In between widths available	30	50	100
Lengths	Any lengths available - Stock rolls 50 meters		
Available Options	Nylon coating grooved side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)		
Tension Member Options	Steel standard		

Spliced and Welded "V"



Specifications			
Widths (mm) In between widths available	30	50	100
Min. Joined Length (mm) Increasing in 10mm increments	880		
Available Options	Nylon coating grooved side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)		
Tension Member Options	Steel standard		

Truly Endless "BFX"

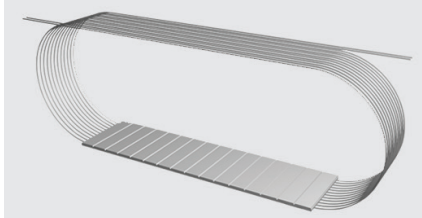

Specifications					
Widths (inches) In between widths available	25	32	50	75	100
Lengths	Additional lengths available up to 30,000mm. In between lengths available starting at a minimum length of 1,700mm.				
Available Options	Nylon coating grooved side (PAZ)				
Tension Member Options	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel				

Specifications

Timing Belt	Pitch (mm)	Code	Ultimate Tensile Strength (N/10mm belt width)	Maximum Allowable Tensile Strength (N/10mm belt width)	Specific Belt Stiffness Steel Reinforced (Per unit width/length)	Specific Belt Mass (per 10mm belt width, steel reinforced)	Min. # of Teeth on Pulley / Flat Idler Min. Ø no back bending	Min. # of Teeth on Pulley / Flat Idler Min. Ø with back bending
Flat Belt Series	F3.0	M	12320	3080	7.70×10^5 N	0.069 kg/m	Ø120 / 120mm	Ø120 / 150mm
		V	6160	1540	7.70×10^5 N			
		BFX	8480	2120				

Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]

50 F3.0 / 3000 M