214 LOW VOC PIPE CLEANER

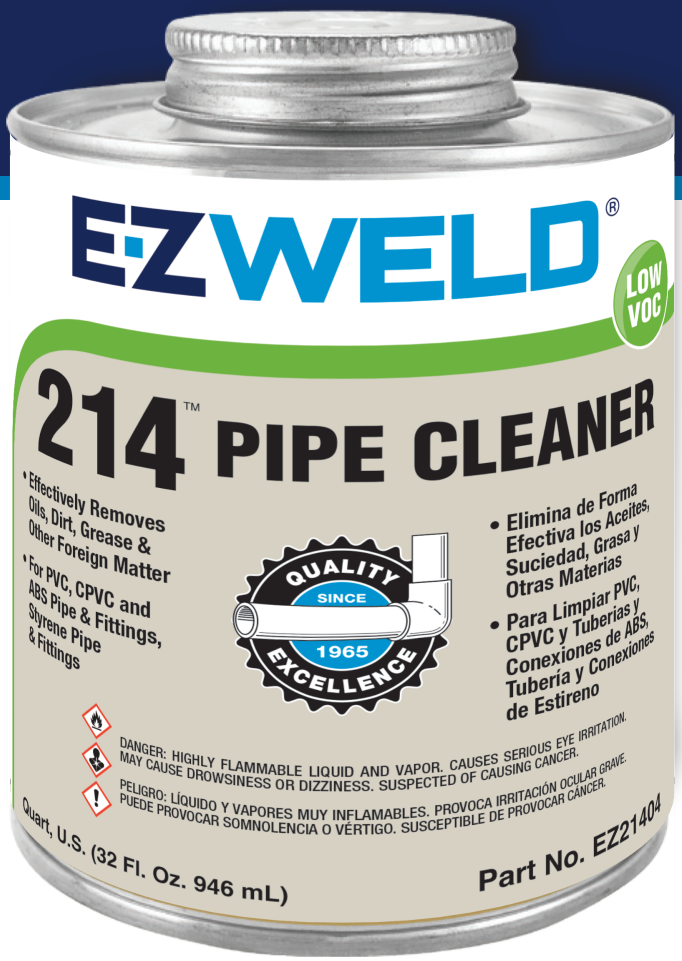

General Description:

E-Z Weld Cleaner is a clear blend of solvents formulated as a fast-acting cleaner to effectively removes oil and grease from the surfaces of PVC / uPVC, CPVC, ABS and STYRENE pipe and fittings.

Application:

E-Z Weld Pipe Cleaner can be used on PVC, CPVC, ABS and Styrene. Use applicator supplied with can or clean cloth to apply it, wipe off with clean dry cloth.

Always follow instructions on the label.

Application temperature:	-10°F to 110°F (-23°C to 43°C)
Storage temperature:	-10°F to 110°F (-23°C to 43°C)

Quality Assurance:

Every batch of cleaner is carefully checked and monitored to assure consistently high quality standards. Records of every batch are kept. All ingredients are purchased from approved suppliers.

Physical properties:

Color: Clear
Body: Regular
Specific Gravity: 0.794
Shelf Life: 3 years (unopened can)

LOW VOC (VOLITILE ORGANIC COMPOUND)

Maximum VOC per SCAQMD 1171: 20 g/l

Availability:

Size	Part No. Regular	(UPC No.)
QP	410029	0812574100297
HP	410028	0812574100280
PT	410027	0812574100273
QT	410026	0812574100266
GA	410025	0812574100259

Pt. And Qt. cans are supplied with dauber inside cap. Gallon sizes supplied with plain cap only.

E-Z WELD®
OUR NAME IS OUR BOND

E-Z WELD
100 Trousdale Way,
Hartsville, TN 37074, USA
Tel: (310) 886-7600 • www.e-zweld.com

Email: sales@e-zweld.com
www.e-zweld.com

214 LOW VOC PIPE CLEANER

Packaging:

Size	¼ Pt	½ Pt	Pt	Qt	Gal
Fluid oz	4	8	16	32	128
Liters	0.12	0.24	0.47	0.95	3.78
Units per case	24	24	12	12	6
Weight per case - Lb.	9.5	16	15.5	28	54
Weight per case - Kg	4.32	7.27	7.05	12.73	24.55
Cubic feet per case	0.260	0.420	0.404	0.762	1.221
Cubic meter per case	0.007	0.012	0.011	0.022	0.035
Cases per pallet	145	90	88	56	27

Safety Precautions:

Ensure adequate ventilation to avoid vapor build up which may cause flash fire. Vapor build up may also cause dizziness, headaches or eye watering. If symptoms are experienced use respiratory protection (NOISH/MSHA TC-23C or equivalent) or leave are and provide more fresh air. Avoid contact with eyes, skin and clothing by use of safety glasses and gloves. Professionals should consult ASTM Standard F402 - 18 Standard Practice for Safe Handling of Solvent Cements, Primers, and Cleaners Used for Joining Thermoplastic Pipe and Fittings. Professional users should also read the Safety Data Sheet for the product.

Inhalation: If breathing is difficult vacate to fresh air. If breathing problems persist seek immediate medical attention.

Eyes: Flush eyes thoroughly with water for 15 minutes. Get immediate medical attention.

Internal: If swallowed give 1 or 2 glasses of water immediately, call physician, hospital or poison control immediately.
DO NOT INDUCE VOMITING.

Shipping / Transportation:

Material packaged in less than a liter size is exempted under "Limited Quantity Rules" by DOT. These packages may be shipped with the description ORM - D Consumer Commodity. Packages shipped under this description are not subject to shipping paper requirements for flammable materials.

For a liter and larger sizes (gallon and above container):

Proper Shipping Name: Compound Cleaning Liquid
Flammable Class: 3
UN No: UN 1993
Packing Group: PG II

⚠ **WARNING:** Can expose you to vinyl chloride, a carcinogen. See www.P65Warnings.ca.gov.

REV/03/26

E-Z WELD®
OUR NAME IS OUR BOND

E-Z WELD (U.S.A. Headquarters)
1661 President Barack Obama Hwy
Riviera Beach, Florida 33404
+1-800-327-8460 +1-561-844-0241
Fax: +1-561-848-8958

E-Z WELD (Branch)
Business Centre, Dubai World Central
P.O. Box 390667
Dubai, United Arab Emirates
+1-800-327-8460 +1-561-844-0241

Email: sales@e-zweld.com
www.e-zweld.com