
SEALING COVER

FLOOD PROTECTION

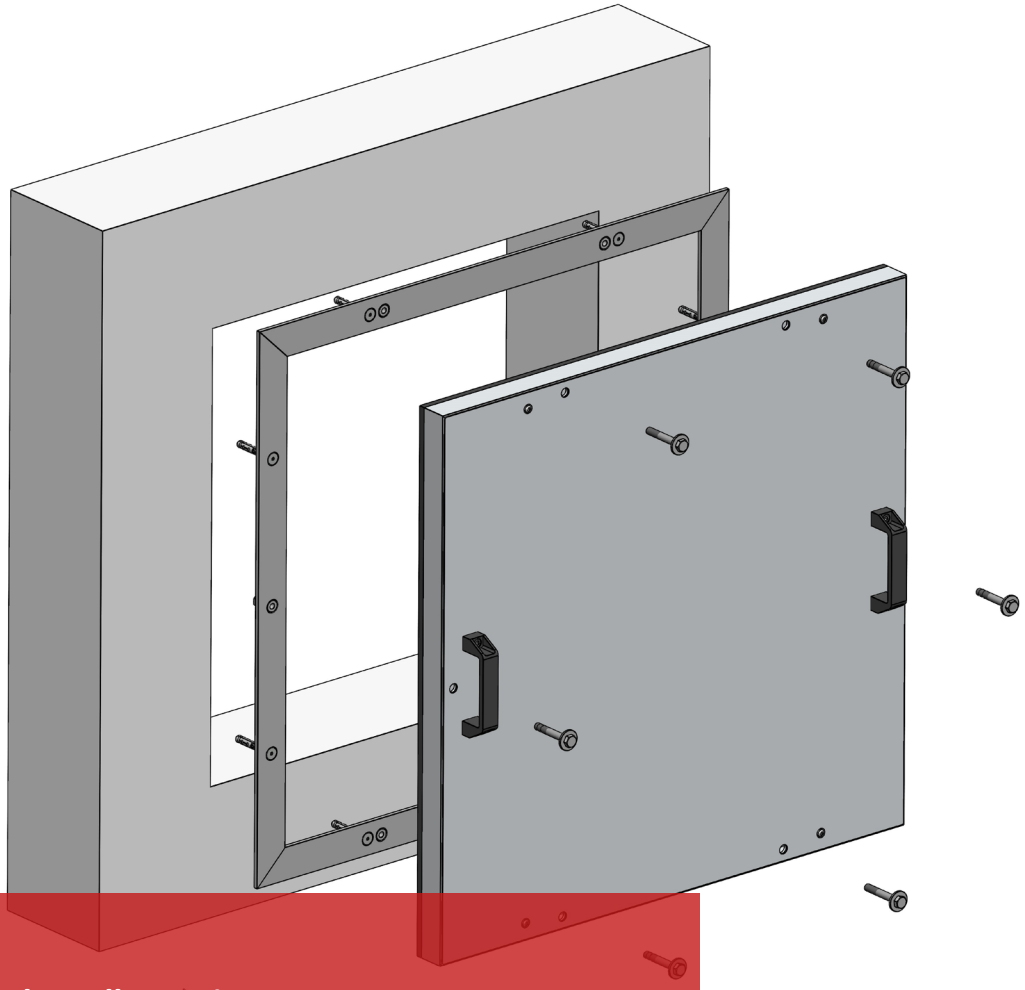


Quickly Seals Wall Openings.

Easily reusable.

Simple and Fast On-Site Installation.

Custom Sizes and Designs Available.

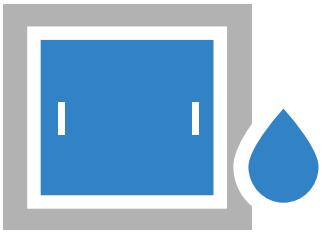

QUICK SEALING OF HOLES IN WALLS

The cover's low weight relative to its size makes it easy to handle and allows for quick transport from a storage location to where it is needed.

Integrated handling grips ensure a high degree of safety during installation and removal. The mounting bolts can be tightened using standard tools, which are included with the delivery.

EASILY REPEATABLE

The sealing cover is designed as temporary and reusable protection against torrential water and flash floods.

After use, it simply needs to be washed with clean water and stored until it is needed again.

QUICK AND EASY INSTALLATION AT THE CUSTOMER

To ensure maximum watertightness, a stainless steel strip is mounted to the wall around the opening.

This strip provides a perfectly flat and easy-to-maintain surface for the cover's gasket to seal against. The strip is designed for quick and simple installation using mechanical anchors, without the need for excessive chemical adhesives.



SIZE AND DESIGN ACCORDING TO THE CUSTOMER'S REQUESTS

Size opening range:	300x300 to 1500x1500, at the same time it is also possible to change the shape
Water column:	1500 mm from the bottom edge of the cover
Cover material:	Depending on the size and retained water column, aluminum steel or hot-dip galvanized steel, outer sheet aluminum
Frame material:	Stainless steel
Color:	Standard without, on request according to the RAL sample







012024.0365EN

Other flood protection solutions offered:

MOBILE BARRIER: INOVA AL

MOBILE BARRIER: FLOM

PASSIVE DAM

WATERTIGHT DOOR: PPD

WATERTIGHT GATE

ANTI-CONTAMINATION BARRIER

MOBILE BARRIER: JPZ

ATYPICAL WATERTIGHT SOLUTIONS