


VALVULAS: VALVULA RETENCION DE BOLA GA/ball check valve



DIMENSIONES/SIZE

DN	L	D	D1	D2	f	Z-d
50	202	160	125	99	2	4-15
65	220	178	145	118	2	4-16
80	225	195	160	132	2	8-16
100	240	215	180	156	2	8-18
125	315	245	210	184	2	8-18
150	320	278	240	211	2	8-18
200/10	400	335	295	266	2	8-20
250/10	500	390	350	319	2	12-23

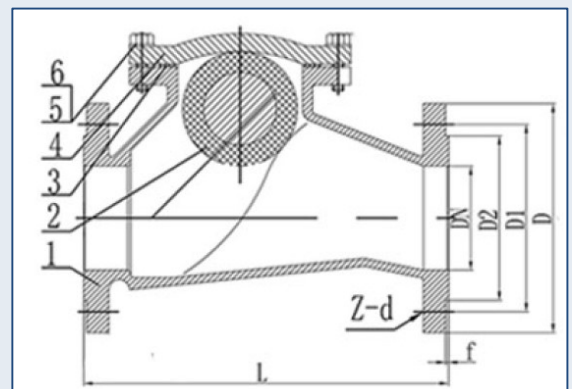

COMPONENTES/COMPONENTS

1	CUERPO/BODY	F.DUCTIL GGG-40/DUCTIL IRON
2	BOLA/BALL FLOAT	F.DUCTIL + NBR/DUCTIL IRON + NBR
3	JUNTA GOMA DE CIERRE/O-RING	NBR
4	TAPA DE CIERRE/BONNET	F.DUCTIL GGG-40/DUCTIL IRON
5	TORNILLO/BOLT	ACERO INOX. A-2/STAINLESS STEEL
6	ARANDELA/WASHER	ACERO INOX. A-2/STAINLESS STEEL
VALVULA ESPECIALMENTE DISEÑADA PARA IMPULSIONES CON AGUAS RESIDUALES Y LODOS, SE PUEDE INSTALAR HORIZONTAL O VERTICALMENTE TEMPERATURA DE TRABAJO DE -10° C A 80° C		