



VALVULAS: **VALVULA RETENCION DOBLE DISCO** **DUAL PLATE CHECK VALVE WAFER TYPE**

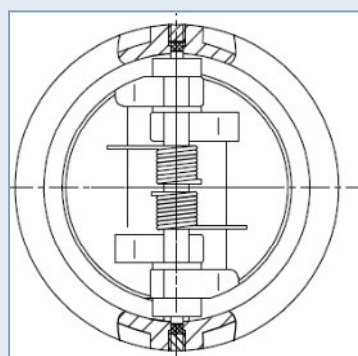


MATERIALES/COMPONENTS

CUERPO/BODY	F. GRIS EN-GJL-250/CAST IRON
DISCOS/DISK	ACERO INOX. AISI-304/STAINLESS STEEL CF8M
EJE /AXLE	ACERO INOX. AISI-304/STAINLESS STEEL CF8M
MUELLES/DOCK	ACERO INOX. AISI-304/STAINLESS STEEL CF8M
EJE TOPE/SPRING	ACERO INOX. AISI-304/STAINLESS STEEL CF8M
ARANDELA/WASHER	TEFLON/PTFE

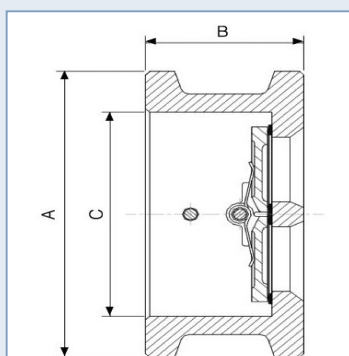

MED	50	65	80	100	125	150	200	250	300	350	400	450	500	600
A	106	126	141	161	191	217	272	327	377	437	488	538	591	699
B	43	46	64	64	70	76	89	114	114	127	140	152	152	178
C	66	78	90	115	141	170	210	273	324	356	406	457	508	600

DIAGRAMA DE PERDIDAS DE CARGA QUE GENERA

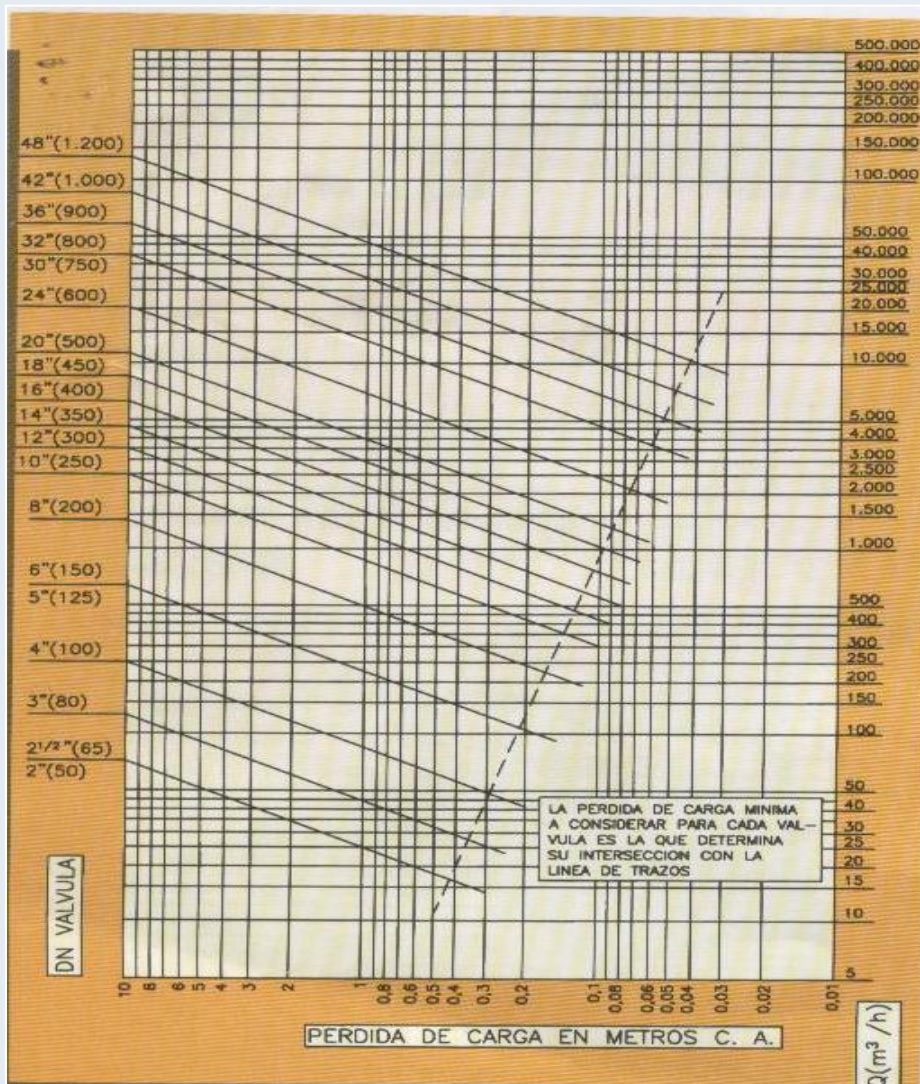

TEMPERATURA DE -10° C A 120 ° C
PARA IMPULSIONES DE AGUAS LIMPIAS O POCO CARGADAS
PRESION DE TRABAJO: PN- 10/16