



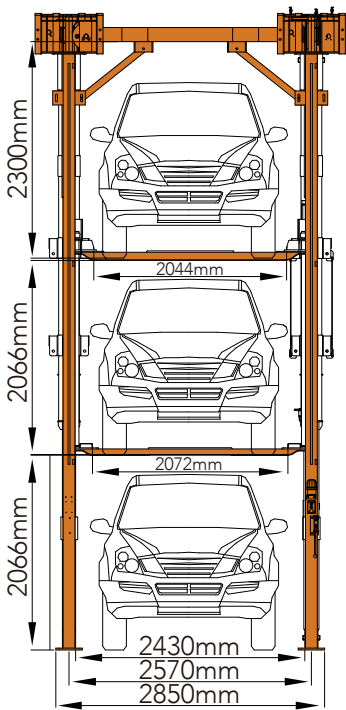

One of the most compact and reliable solutions. Hydro-Park 3230 offers 4 car parking spaces on the surface of one, while Hydro-Park 3130 offers 3. Their robust structure allows 3000kg capacity on each platform. Their parking is dependent, low level car(s) has to be removed before getting the upper one, suitable for car storage, collection, valet parking or other scenarios with attendant. Manual unlock system greatly reduces malfunction rate and prolongs system service life. Outdoor installation is also allowed.

- 3000kg capacity per platform
- 1 parking space = max 4 parking levels = cost saving
- Allowed car height is 2000mm
- Feature of post sharing enables multiple installations in limited space
- Driven by hydraulic cylinder + steel rope
- Multi-position anti-falling fail safe locking system
- Manual unlock system
- Powder coating provides long lasting surficial protection
- One power pack can be shared by max 4 side-by-side units
- Centralized commercial power pack optional
- Seismic moment frame is optional as additional reinforcement

Dimensions & Specifications

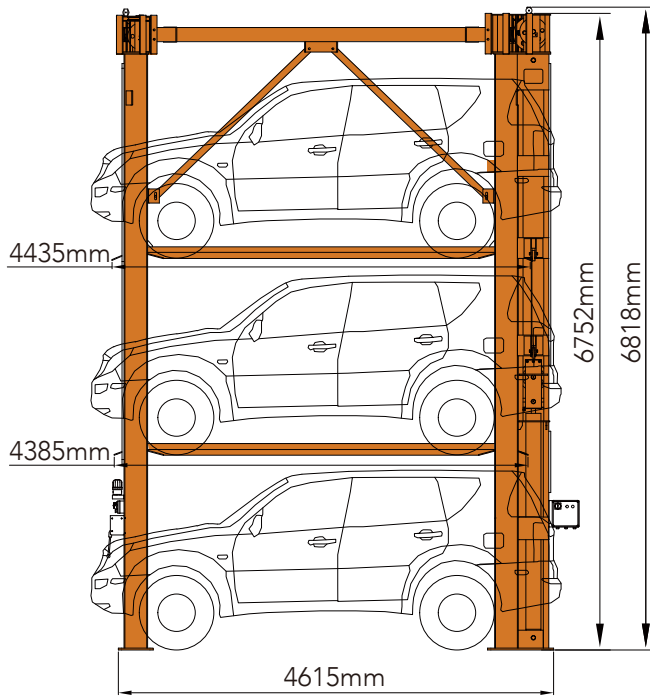



Available vehicle parking	3 cars / 4cars
Lifting speed	<90s / <150s
Rated capacity	3000kg / 6600lbs
Drive-through width	2050mm / 81 inches
Available vehicle height	2000mm / 79 inches
Operation mode	Key switch
Lock release	Manual with handle
Drive mode	Hydraulic cylinder + steel ropes
Pump power	5.5Kw / 7.5Kw
Finishing	Powder coating with Akzo Nobel powder
Control voltage	24V
Power supply	208 – 480V, 3 phase, 50/60Hz



One of the most compact and reliable solutions. Hydro-Park 3230 offers 4 car parking spaces on the surface of one, while Hydro-Park 3130 offers 3. Their robust structure allows 3000kg capacity on each platform. Their parking is dependent, low level car(s) has to be removed before getting the upper one, suitable for car storage, collection, valet parking or other scenarios with attendant. Manual unlock system greatly reduces malfunction rate and prolongs system service life. Outdoor installation is also allowed.

- 3000kg capacity per platform
- 1 parking space = max 4 parking levels = cost saving
- Allowed car height is 2000mm
- Feature of post sharing enables multiple installations in limited space
- Driven by hydraulic cylinder + steel rope
- Multi-position anti-falling fail safe locking system
- Manual unlock system
- Powder coating provides long lasting surficial protection
- One power pack can be shared by max 4 side-by-side units
- Centralized commercial power pack optional
- Seismic moment frame is optional as additional reinforcement

Dimensions & Specifications

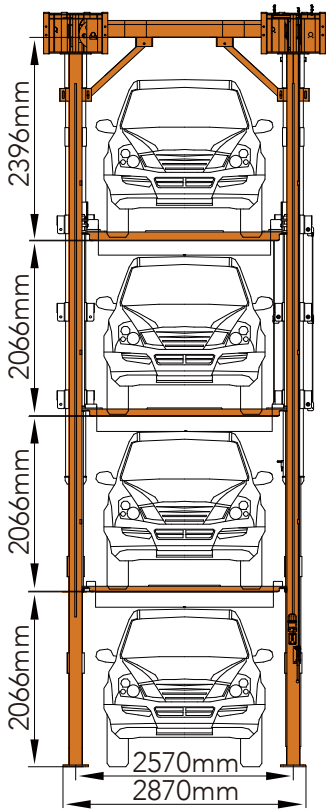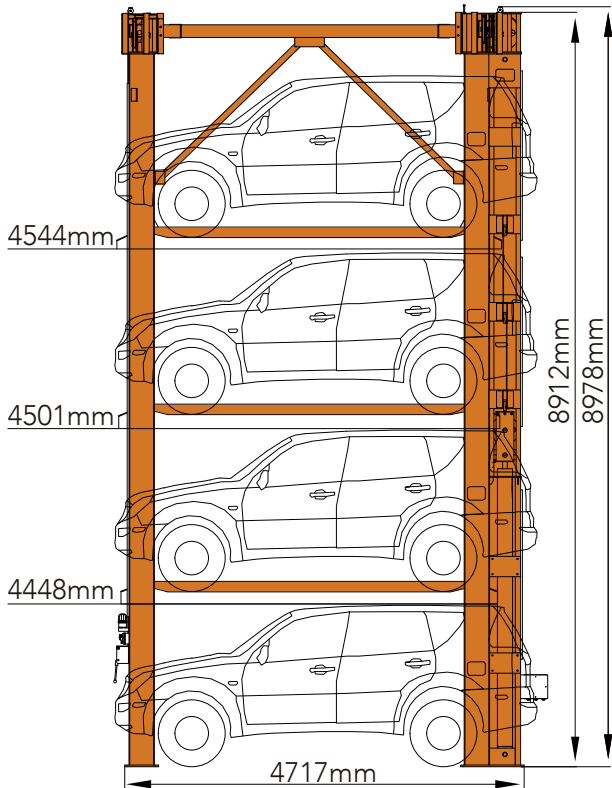

Available vehicle parking	3 cars / 4cars
Lifting speed	<90s / <150s
Rated capacity	3000kg / 6600lbs
Drive-through width	2050mm / 81 inches
Available vehicle height	2000mm / 79 inches
Operation mode	Key switch
Lock release	Manual with handle
Drive mode	Hydraulic cylinder + steel ropes
Pump power	5.5Kw / 7.5Kw
Finishing	Powder coating with Akzo Nobel powder
Control voltage	24V
Power supply	208 – 480V, 3 phase, 50/60Hz