

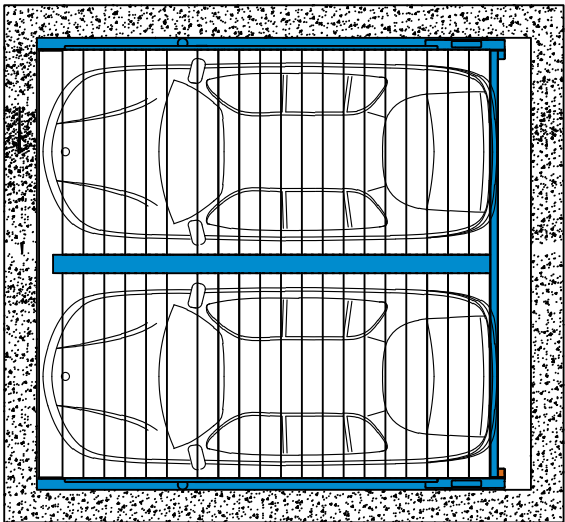


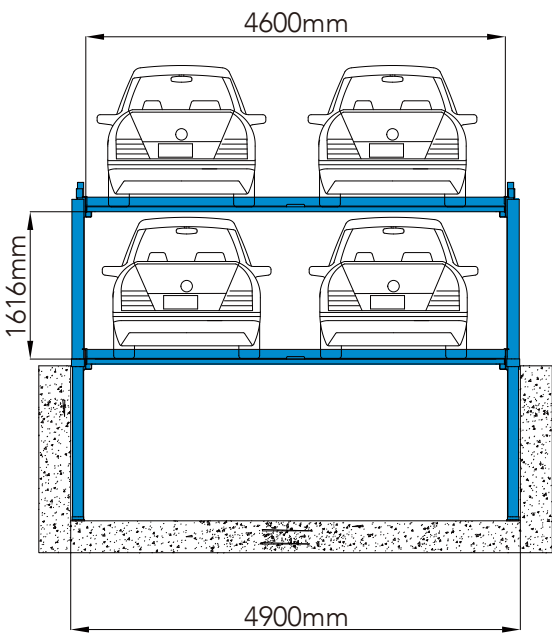


Starke 2227 and Starke 2221 are double system version of Starke 2127 & 2121, offering 4 parking spaces in each system. They provide the maximum flexibility for access by carrying 2 cars on each platform without any barriers/structures in middle. They are independent parking lifts, no cars need to drive out before using the other parking space, suitable for both commercial and residential parking purposes. Operation can be achieved by wall-mounted key switch panel.

- Capacity options are 2100kg and 2700kg for each space
- Platform width up to 5000mm
- Vehicle height in low level selectable from 1500 to 1900mm.
- Dual hydraulic cylinders driven
- Synchronization chains keep platform level at all conditions
- Mechanical anti-falling locks provide ultra-safety
- Additional steel ropes as secondary protection from falling
- Galvanized platform plates, high heel friendly
- Suitable for both commercial and residential parking purposes.
- Both models are to be installed in pit with posts fixed to walls.
- Akzo Nobel powder coating provides long lasting surficial protection
- High level quality guarantee (German TUV / CE certified)

Dimensions & Specifications

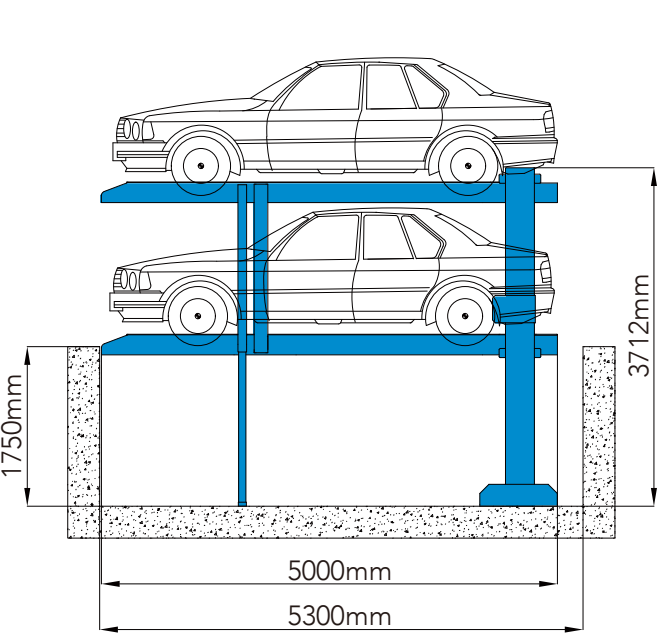




Model	Starke 2221
Vehicles parked per unit	4
Rated capacity	2100kg
Available car length	5000mm
Available car width	2050mm
Available car height	1550mm
Waving plate	Galvanized steel sheet
Drive mode	Hydraulic cylinder + chains
Operation	Key switch
Lifting speed	55s
Descending speed	35s
Power supply	200–480V, 3P, 50/60Hz
Finishing	Powder coating with Akzo Nobel powder

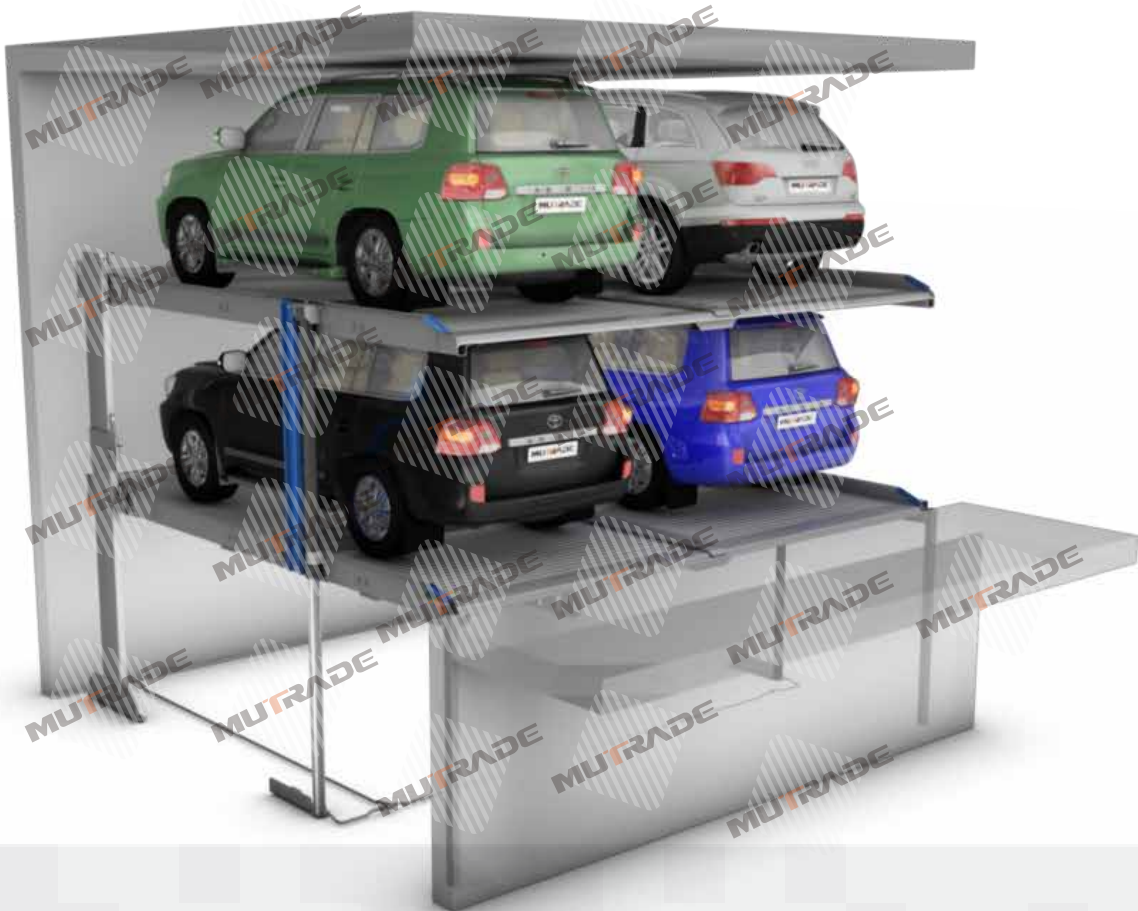

Starke 2227 and Starke 2221 are double system version of Starke 2127 & 2121, offering 4 parking spaces in each system. They provide the maximum flexibility for access by carrying 2 cars on each platform without any barriers/structures in middle. They are independent parking lifts, no cars need to drive out before using the other parking space, suitable for both commercial and residential parking purposes. Operation can be achieved by wall-mounted key switch panel.

- Capacity options are 2100kg and 2700kg for each space
- Platform width up to 5000mm
- Vehicle height in low level selectable from 1500 to 1900mm.
- Dual hydraulic cylinders driven
- Synchronization chains keep platform level at all conditions
- Mechanical anti-falling locks provide ultra-safety
- Additional steel ropes as secondary protection from falling
- Galvanized platform plates, high heel friendly
- Suitable for both commercial and residential parking purposes.
- Both models are to be installed in pit with posts fixed to walls.
- Akzo Nobel powder coating provides long lasting surficial protection
- High level quality guarantee (German TUV / CE certified)

Dimensions & Specifications

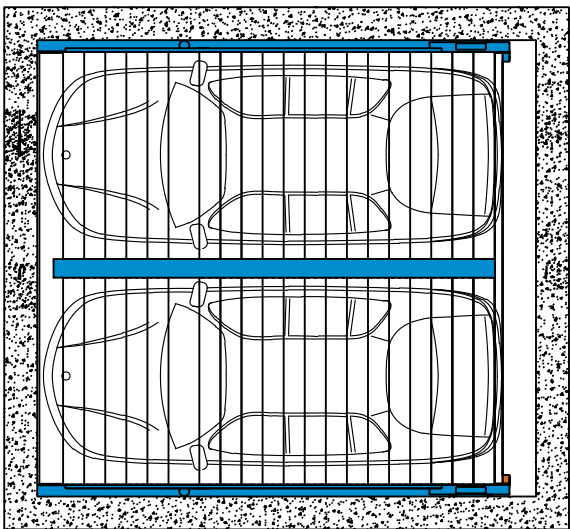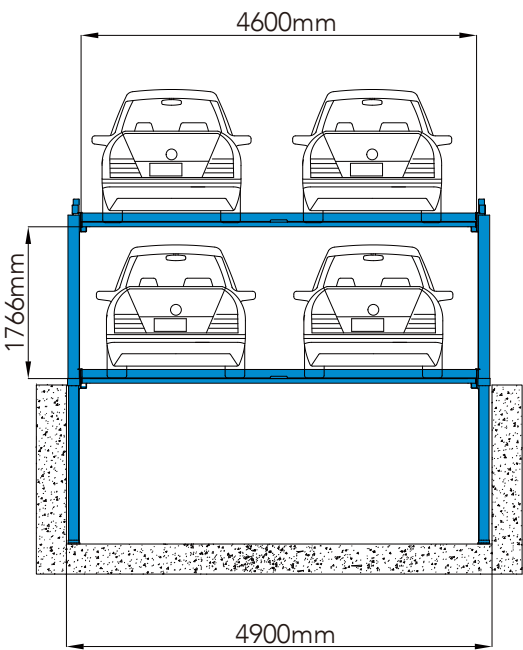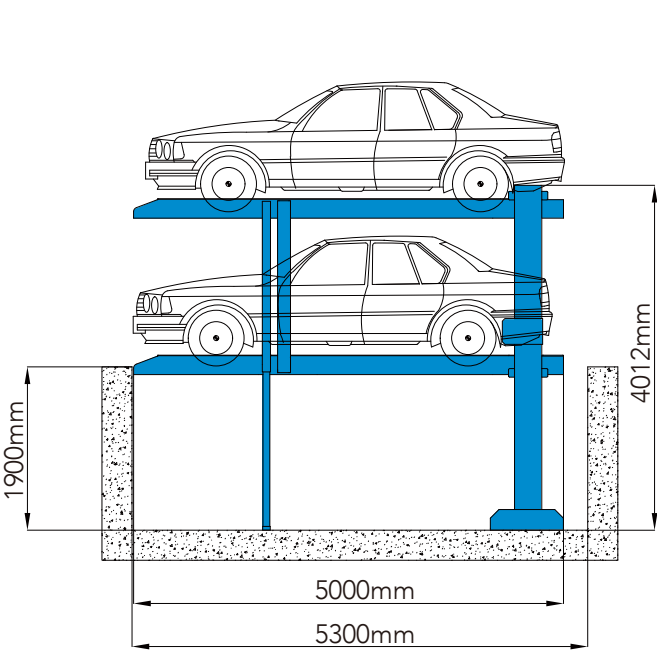

Model	Starke 2227
Vehicles parked per unit	4
Rated capacity	2700kg
Available car length	5000mm
Available car width	2050mm
Available car height	1700mm
Waving plate	Galvanized steel sheet
Drive mode	Hydraulic cylinder + chains
Operation	Key switch
Lifting speed	55s
Descending speed	35s
Power supply	200–480V, 3P, 50/60Hz
Finishing	Powder coating with Akzo Nobel powder