

Lift & Slide with Underground Car Stacker Starke 3121



The system is semi-automatic puzzle parking type, one of the most space-saving system that parks three cars on top of each other. One level is in pit and another two on above, the middle level is for access. The user slides his IC card or inputs the space number on operation panel to shift spaces vertically or horizontally and then move his space to entry level automatically. Safety gate is optional to protect cars from theft or sabotage.

Hydraulic driven

Capacity of each platform is 2100kg or 2700kg
Platform width up to 2500mm

Recommended car spaces in each system < 32 vehicles.


Programed automatic PLC control


Operation by IC card or buttons


Galvanized platform plates, high heel friendly

Foundation pit is required
Combinable with individual BDP-2 system
High level quality guarantee (German TUV / CE certified)

Dimensions & Specifications

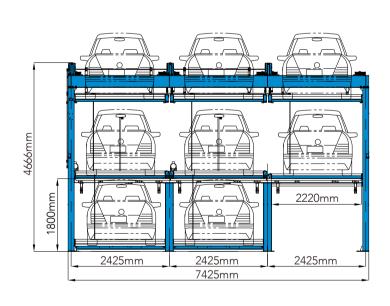





Model	Starke 3121
Levels	-1+2
Available vehicle size	5000mm x 1950mm x 1550mm (LxWxH)
Drive mode	Hydraulic cylinder
Lifting capacity	2100kg
Hydraulic pump power	4Kw
Lifting speed	8-12m/min
Sliding speed	8m/min
Control	Omron PLC system
Operation	Button & IC cards
Finishing	Powder coating with Akzo Nobel powder



Lift & Slide with Underground Car Stacker Starke 3127



The system is semi-automatic puzzle parking type, one of the most space-saving system that parks three cars on top of each other. One level is in pit and another two on above, the middle level is for access. The user slides his IC card or inputs the space number on operation panel to shift spaces vertically or horizontally and then move his space to entry level automatically. Safety gate is optional to protect cars from theft or sabotage.

Hydraulic driven

Capacity of each platform is 2100kg or 2700kg Platform width up to 2500mm


Recommended car spaces in each system < 32 vehicles.


Programed automatic PLC control
Operation by IC card or buttons
Galvanized platform plates, high heel friendly
Foundation pit is required


Combinable with individual BDP-2 system

High level quality guarantee (German TUV / CE certified)

Dimensions & Specifications

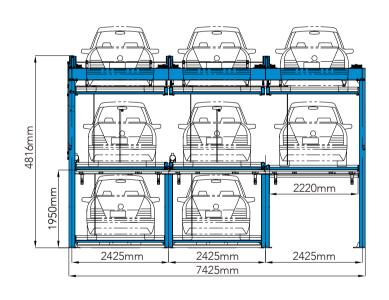





Model	Starke 3127
Levels	-1+2
Available vehicle size	5000mm x 1950mm x 1700mm (LxWxH)
Drive mode	Hydraulic cylinder
Lifting capacity	2700kg
Hydraulic pump power	4Kw
Lifting speed	8-12m/min
Sliding speed	8m/min
Control	Omron PLC system
Operation	Button & IC cards
Finishing	Powder coating with Akzo Nobel powder