

# PENETRATING STONE ENHANCER

## 2-IN-1 COLOR ENHANCER & SEALER

ALL NATURAL STONE



**WATER -BASED TECHNOLOGY**

### WHAT IT'S FOR

- Enriches the color of polished, honed, textured and tumbled natural stone.
- Provides a matte finish that highlights the natural surface character.
- Protects the surface from dirt, water and oil stains.
- Enhances the stone's natural color with a matte finish.
- Excellent protection for countertops, inlays and backsplashes.
- Hides cracks on granite surfaces.

### ADVANTAGES

- Dual action: seals and enhances surfaces.
- Eco-friendly: water-based.
- Ideal for indoor and outdoor surfaces.
- Does not form a film or yellow over time.
- UV and weather resistant.
- Long lasting protection.
- Treated surfaces are safe for food contact.
- Provides very high coverage rates.
- Very low VOC emissions: contributes towards LEED credits.

### HOW TO USE IT

**READY TO USE**, no dilution necessary. Shake well before use. Apply **2-IN-1 COLOR ENHANCER & SEALER** to a clean, dry surface using a paintbrush or other suitable applicator. Rub the surface to allow the product to completely penetrate until any excess residue is wiped off. The surface may be used for normal foot traffic after 4 hours. Full cure and maximum sealer protection is achieved in 8 hours. For deeper, more intense color, apply 2-3 coats; wait no more than 10 minutes between coats. Remove any residue by rubbing the surface with a cloth soaked in **2-IN-1 COLOR ENHANCER & SEALER**. When applying the product on particularly absorbent materials, apply a larger quantity of product on the surface. On compact materials, such as polished natural stone, apply the product to sections of a few square feet at a time to facilitate removing residue.

**Caution:** Once the surface has been treated with **2-IN-1 COLOR ENHANCER & SEALER**, the treatment cannot not be reversed; the stone cannot return to its original state. Before full application, test the product on a small, inconspicuous area or loose sample to see the final color of the stone after treatment. The product does not protect marble, limestone or travertine from acid stains. Apply and leave the product to dry in a well ventilated area. When applying the product indoors, ventilate the room in order to speed up the drying process. Keep the product in a cool, dry place.  
**Storage temperature:** 41° to 86° F, (5° to 30° C). Must be applied to material at temperatures between 50° to 86° F, (10° and 30°C).

Data sheets are subject to change without notice. Powered by **FILA**.



➤ **MATTE, COLOR ENHANCING, ECO FRIENDLY PROTECTION.**

➤ **UV RESISTANT AND NON YELLOWING.**

#### Working Properties:

Surface Traffic = 4 hours  
Full Cure = 8 hours

#### Coverage:

1 QT (0.946 L)

**Polished stone** ›

407 sq.ft. (37 m<sup>2</sup>)

**Natural stone** ›

202-255 sq.ft. (18-24 m<sup>2</sup>)

Coverage rates are indicative and per coat.

#### Packaging:

1 QT (946 ml) 6 plastic bottles per box

# ALL SURFACE SEALER



## ALL SURFACE SEALER

NATURAL STONE, CEMENTGROUT



**WATER -BASED  
TECHNOLOGY**

### WHAT IT'S FOR

- Protects natural stone and grout joints from stains. Protects grout joints from water and humidity. Makes cleaning fast and easy.
- Keeps grout joints looking new for years.
- Can be used both indoors and outdoors.

### ADVANTAGES

- Eco-friendly: water-based.
- Dual-action: protects grout joints and makes cleaning easier.
- Does not alter grout joint color.
- Odorless.
- Fast drying.
- VOC free: contributes towards LEED credits.
- PFOA free: non carcinogenic.

### HOW TO USE IT

Apply **ALL SURFACE SEALER** evenly with a brush, sponge or lambswool applicator. Remove excess product immediately. The surface may be used for normal foot traffic after 4 hours. Full cure and maximum sealer protection is achieved in 8 hours.

**Caution:** When sealing grout with ceramic tile, make sure to remove the sealer from the tile with a cloth.

**WARNING:** Keep out of reach of children.

Storage temperature: Between 41°F and 86°F (5°C and 30°C).

Must be applied at temperatures between 50°F and 86°F (10°C and 30°C).



➤ **DRIES FAST.**

➤ **ECO-FRIENDLY STAIN PROTECTION.**

#### Working Properties:

Surface Traffic = 4 hours

Full Cure = 8 hours



#### Coverage:

1 GAL

#### Natural stone ›

1,400 sq. ft. (120 m<sup>2</sup>)

#### Cement grout joints ›

Min coverage:

4,000 sq. ft. (400 m<sup>2</sup>)

Max coverage:

8,000 sq. ft. (800 m<sup>2</sup>)

Coverageratesareindicativeandper coat.



#### Packaging:

1GAL(3.78L) 4 plastic bottles per box

Data sheets are subject to change without notice. Powered by FILA.

# HEAVY DUTY CLEANER

## ORGANIC STAIN REMOVER

**PORCELAIN AND CERAMIC TILE, ALL NATURAL STONE,  
QUARRY TILE, CONCRETE, TERRACOTTA**



### WHAT IT'S FOR

- Highly concentrated formula, can be used diluted and undiluted.
- Diluted: cleans and degreases porcelain tile, ceramic tile, natural stone, concrete and terracotta.
- Undiluted: removes ground-in dirt from porcelain tile.
- Effective on all natural stone.
- Ideal for the everyday maintenance of concrete.
- Stripper for water-based sealers and polishing waxes.

### ADVANTAGES

- 3-in-1 solution: stain remover, cleaner and stripper.
- Removes stains from porcelain tile.
- Does not damage delicate surfaces.
- Easy and safe to use.
- Biodegradable.

### HOW TO USE IT

**To clean porcelain tile:** Dilute 1:10 (1QT in 2.5 GAL of water) for regular cleaning. For heavy dirt build up, dilute 1:5 (1QT in 5 QT of water). Scrub vigorously with an abrasive pad and rinse thoroughly.

**To remove stubborn stains on porcelain tile:** Pour **Organic Stain Remover** undiluted directly on the stain. Allow it to completely dry (20-60 minutes), then scrub vigorously with an abrasive pad. Rinse thoroughly.

**To clean unpolished natural stone:** Dilute 1:10 when used on matte, honed, and natural finish stone.

**To clean polished natural stone:** Dilute 1:20 (1/2 QT in 2.5 GAL) when used on polished or highly honed natural stone.

**To strip wax:** Dilute 1:5. Let sit for 15 minutes, then scrub and rinse.

**Caution:** Do not use on wood or acrylic tubs.

**Storage temperature:** Between 41°F and 86°F (5°C and 30°C).

Must be applied at temperatures between 41°F and 86°F (5°C and 30°C).

➤ **REMOVES ORGANIC STAINS: COFFEE,  
WINE, GREASE, DIRT.**

➤ **CLEANS AND DEGREASES.**



**Coverage:**

(1 QT - 0.946 L)

**Porcelain** › Dilution 1:5  
400 sq.ft. (30 m<sup>2</sup>)

**Maintenance** › Dilution 1:20  
2,035 sq.ft. (189 m<sup>2</sup>)

**Wax stripper** › Dilution 1:5  
200 sq.ft. (19 m<sup>2</sup>)

**Post-installation cleaning of  
unpolished stone** ›  
Dilution 1:5

305 sq.ft. (28 m<sup>2</sup>)

Coverage rates are indicative.



**Packaging:**


1 QT (946 mL) 6 plastic bottles  
per box

Data sheets are subject to change without notice. Powered by FILA.

# CEMENTITIOUS GROUT HAZE REMOVER

## RUST & HAZE REMOVER

**PORCELAIN AND CERAMIC TILE, ACID RESISTANT  
STONE, QUARRY TILE, TERRACOTTA**

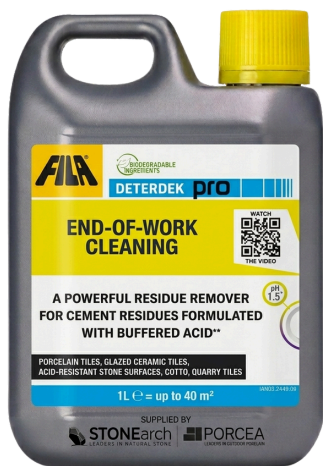

## WHAT IT'S FOR

- Eliminates cementitious grout haze, efflorescence, lime deposits and hard water stains.
- Removes soap scum, rust stains, paint and construction dirt.
- Use indoors and outdoors on floors, walls, shower stalls, bathroom fixtures and facades.
- Safe on acid resistant stone, porcelain, ceramic tile and terracotta.
- Ideal for post-installation cleaning: it removes inorganic construction dirt.

## ADVANTAGES

- Concentrated formula: high coverage.
- Eco-friendly: does not emit fumes that are harmful to people or the environment. A welcome alternative to muriatic acid.
- Does not alter the color of the material.
- Does not damage or corrode aluminum and steel trims when used according to the application instructions.
- Can be used as a cleaner or limescale remover, based on the dilution. Biodegradable.

## HOW TO USE IT

**POST INSTALLATION CLEANING:** Wet the surface and grout joints with water, then use **RUST & HAZE REMOVER** diluted 1:5 (1 QT of product in 5 QT of water). Apply the solution to sections of a few square feet at a time. Let sit a few minutes, then rub vigorously with an abrasive pad or large brush. Remove the residue with a cloth or wet vac and rinse with plenty of water. Should any stubborn dirt remain, repeat the application with a more concentrated solution.

**OUTDOOR CLEANING:** On surfaces with outdoor contaminants (smog, dust, etc.), dilute 1:10 (1 QT of product in 2.5 GAL of water). Then follow the application instructions above.

**Caution:** Do not use on acid sensitive stone such as marble, limestone, or travertine. Test the product on a small, inconspicuous area of the surface or loose sample prior to full application.

**Storage temperature:** between 41°F and 86°F (5°C and 30°C). Must be applied at temperatures between 41°F and 86°F (5°C and 30°C).

➤ **ELIMINATES CEMENTITIOUS GROUT  
HAZE, EFFLORESCENCE, LIME  
DEPOSITS, HARD WATER STAINS, RUST  
STAINS AND PAINT.**

➤ **IDEAL FOR POST-INSTALLATION  
CLEANING: REMOVES INORGANIC  
CONSTRUCTION DIRT.**



**Coverage:**

(1 QT - 0.946 L)

**Porcelain** › Dilution 1:5

410 sq.ft. (38 m<sup>2</sup>)

Acid resistant natural stone › 1:5- 1:10

200-350 sq.ft. (19-33 m<sup>2</sup>) **Terracotta**

› Dilution 1:5

100-200 sq.ft. (10-19 m<sup>2</sup>)

Coverage rates are indicative.

**Packaging:**

1 QT (946 mL) 6 plastic bottles per

box



Data sheets are subject to change without notice. Powered by FILA.