


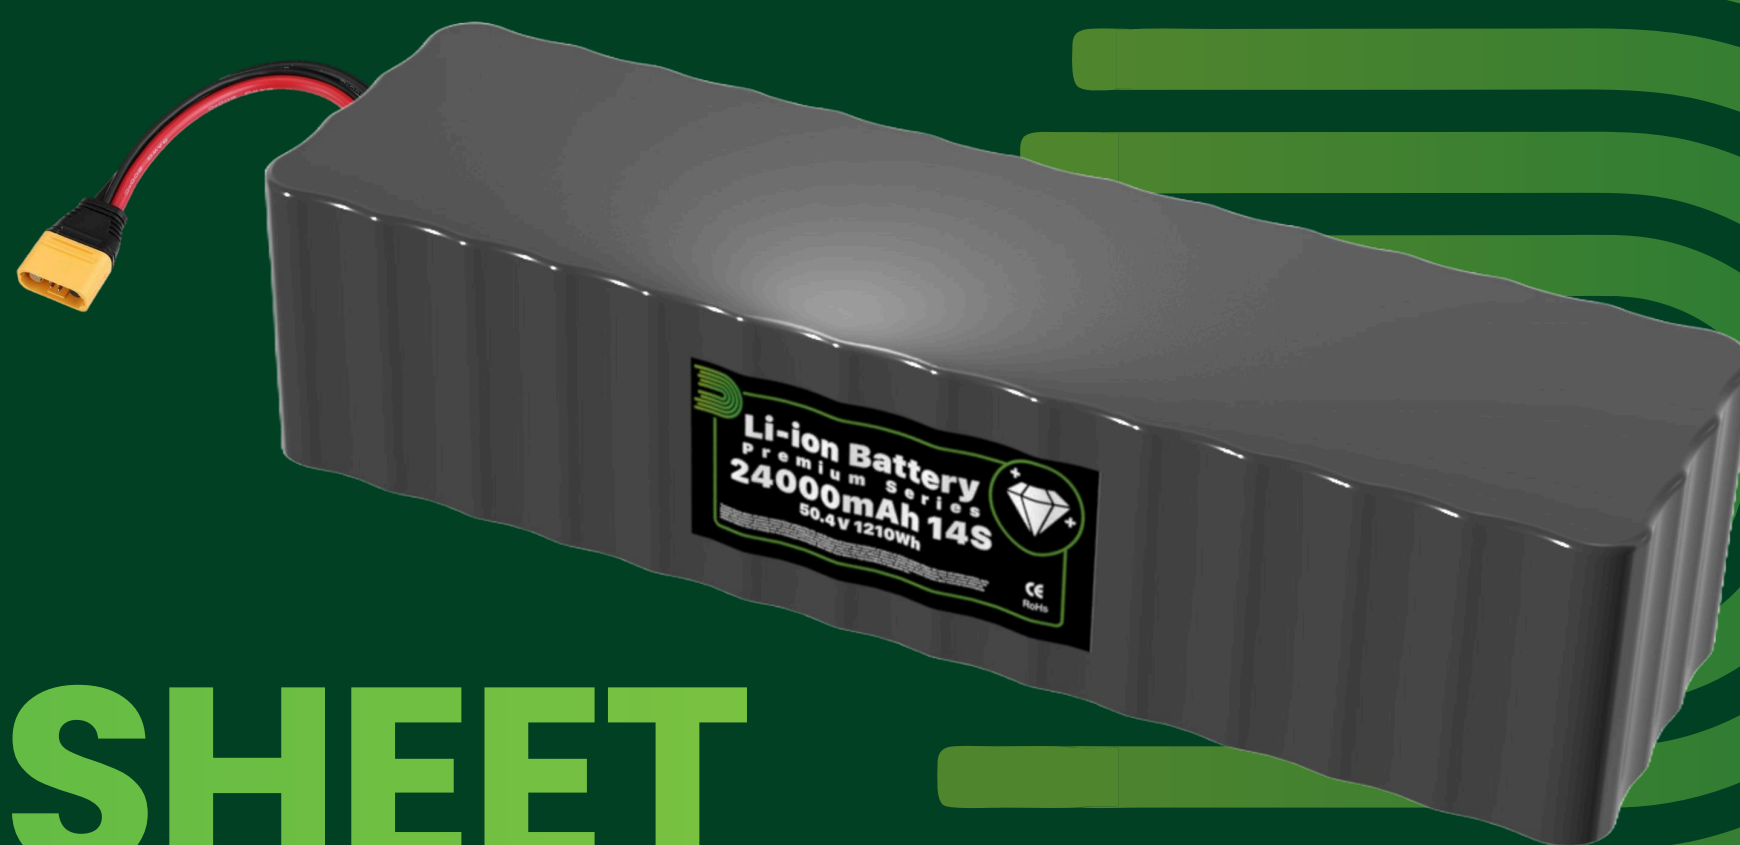

DATASHEET

Premium High Power & Density 14S Series

PRODUCT OVERVIEW

The Premium Molicel 14S Series is built for heavy-duty drones, VTOL UAVs and professional platforms requiring 60V-class systems for optimized power-to-weight and efficiency. This series uses advanced high energy cells (Molicel P60C & Molicel M65A), pushing boundaries on endurance, payload capacity, and mission distances.

APPLICATIONS



Commercial Drones
Agriculture, Cargo, Missions, Tactical



Robotics
Warehouse, Cargo, Missions, Tactical

CONNECTORS

For models with Smart BMS:

- **AS150U** Connector (Power + Communication)

For models without Smart BMS, providing cell balancing capability:

- **XT90** Connector (Power)
- **Molex Micro-Fit 16-pin** Connector (Balancing)

PROTECTION FEATURES

Overcharge Protection
Over-discharge Protection
Overcurrent Protection
Short Circuit Protection
Temperature Monitoring and Protection

COMMUNICATION INTERFACES

CANBUS
RS485
UART

ADDITIONAL FEATURES

State of Charge (SOC) Estimation
Cell Balancing
Remote Monitoring Capability

** The above features apply only for battery models with smart BMS.

	M O D E L			
	TN14S4P-P60C-01	TN14S4P-M65A-01	TN14S8P-P60C-01	TN14S8P-M65A-01
ELECTRICAL SPECIFICATIONS				
Cell Configuration	14S 4P	14S 4P	14S 8P	14S 8P
Nominal Voltage	50.4 V	50.4 V	50.4 V	50.4 V
Nominal Capacity	24 Ah	26 Ah	48 Ah	52 Ah
Energy	1,210 Wh	1,310 Wh	2,420 Wh	2,620 Wh
Charge Voltage	58.8 V	58.8 V	58.8 V	58.8 V
Cut-off Voltage	35 V	35 V	35 V	35 V
Energy Density	288 Wh/kg	322 Wh/kg	288 Wh/kg	322 Wh/kg
CURRENT PARAMETERS				
Max Continuous Discharge Current	72 A (10C)	104 A (4C)	144 A (10C)	208 A (4C)
Max Pulse Discharge Current (≤30s)	120 A (16.7C)	156 A (6C)	240 A (16.7C)	312 A (6C)
Max Charge Current	24 A (5C)	26 A (1C)	48 A (5C)	52 A (1C)
PHYSICAL SPECIFICATIONS				
Dimensions (L x W x H)	100 x 80 x 350 mm 100 x 72 x 350 mm(no BMS)	100 x 80 x 350 mm 100 x 72 x 350 mm(no BMS)	200 x 80 x 350 mm 200 x 72 x 350 mm(no BMS)	200 x 80 x 350 mm 200 x 72 x 350 mm(no BMS)
Weight	4.4 kg	4.2 kg	8.4 kg	8.2 kg
Enclosure Material	PVC Shrink Wrap	PVC Shrink Wrap	PVC Shrink Wrap	PVC Shrink Wrap
ENVIRONMENTAL SPECIFICATIONS		PERFORMANCE SPECIFICATIONS		
Operating Temperature	Charge: 0°C to 45°C	Cycle Life	~600 cycles @0.5C/-1C ~500 cycles @1C/1C	
	Discharge: -20°C to 60°C	Designed to Meet	CE, UN 38.3, RoHS, IEC 62133	
Storage Temperature	Short-term (<1 month): -20°C to 45°C	Warranty	12 months	
	Long-term (>1 month): 0°C to 25°C			
Humidity	≤85% RH			

GOT QUESTIONS?
GET IN TOUCH WITH US

Dan-Tech Energy GmbH

🌐 www.danenergy.com

📍 Max-Planck-Str. 7, Berlin 12489 Germany

☎ +49 (030) 5770-34433

✉ info@danenergy.com