

kassow robots
strong · fast · simple

Joining forces with

rexroth
A Bosch Company

EDGE Edition

The 7-axis collaborative robots
designed for mobile solutions



Designed for
AGV & AMR



Run directly with
DC connection



**No external
controller**



The most compact
solution on the market.

All the power of the KR Series with a **controller integrated into its base**. There is no longer a need for an external controller. The compactly designed Edge Edition makes it a **perfect fit for mobile solutions**.



Reach **up to 1800 mm**



Payload **up to 40 kg**



Joint speed **up to 225°/s**

The ideal solution for
AGV & AMR applications.

Revolutionise your mobile solutions with our cutting-edge robotic companion. Its unparalleled compactness seamlessly integrates into any system, delivering efficiency and agility like never before.



Direct DC connection and powered via battery
42VDC to 58VDC Remote Power On / Off control -
to control cobot from AGV or PLC.

Standard footprint
160x200mm Standard footprint
Each model has the same base.

Arm can run in automatic mode without Teach Pendant
The arm can be configured to run in automatic
mode without Teach Pendant once it's programmed.



**CONTROLLER INTEGRATED
INTO THE ROBOT BASE**



EDGE Edition

Still 7 axis, now 7 models, **even more flexible.**



General specifications	KR810	KR1018	KR1205	KR1410	KR1805
Reach (mm)	850	1000	1200	1400	1800
Payload (kg)	10	18	5	10	5
Weight (kg)	26	36	27	37	40
Joint speed (deg/s)	225	163/225	225	163/225	163/225
Joint ranges (deg)	J2 and J4: -70°/+180°; J1, J3, J5, J6 and J7: ±360°				
Redundant absolute encoders on joints	Yes	Yes	Yes	Yes	Yes
Repeatability (mm)	+/- 0.03	+/- 0.03	+/- 0.03	+/- 0.03	+/- 0.04
Degrees of freedom	7	7	7	7	7
Footprint (mm)	160 × 200	160 × 200	160 × 200	160 × 200	160 × 200
Operating temperature (°C)	0-45	0-45	0-45	0-45	0-45
Body material	Aluminium				
Protection rating	IP54	IP54	IP54	IP54	IP54
Sound level (dB)	<65	<65	<65	<65	<65

Controller	KR810	KR1018	KR1205	KR1410	KR1805
Digital inputs dedicated E-stop & P-stop (Safety uses 2x I/Os for redundancy)	4	4	4	4	4
External 24V supply (A)	4	4	4	4	4
Digital inputs (Safety supported in pairs)	16	16	16	16	16
Configurable Digital inputs or outputs (Safety supported in pairs)	16	16	16	16	16
Analog Inputs, current/voltage	2	2	2	2	2
Analog outputs, current/voltage	2	2	2	2	2
Remote ON/OFF control	Yes	Yes	Yes	Yes	Yes




Performance, Upgraded.
Learn more about our new models
KR1240 & KR1824.




Power	KR810	KR1018	KR1205	KR1410	KR1805
Power consumption (with max. load; W)	400-600	400-1200	400-600	400-1200	400-1200
Power off consumption, remote ready (W)	0.5	0.5	0.5	0.5	0.5
System boot time (s)	20	20	20	20	20
System powered, no power arm (W)	30	30	30	30	30
Time to initialise arm (s)	2	2	2	2	2
Standstill power consumption, brakes applied (W)	65	65	65	65	65
Time to release brake (ms)	10	10	10	10	10
Standstill power consumption, brakes released (W)	75	75	75	75	75
Typical Cobot avg. power consumption, max payload (W)	200	200	200	200	200
Typical Robot avg. power consumption, max payload (W)	200	300	200	300	300
Supply voltage (VDC)	42-58	42-58	42-58	42-58	42-58
Max external fuse (A)	25	25	25	25	25


BASE PLATE DIMENSIONS

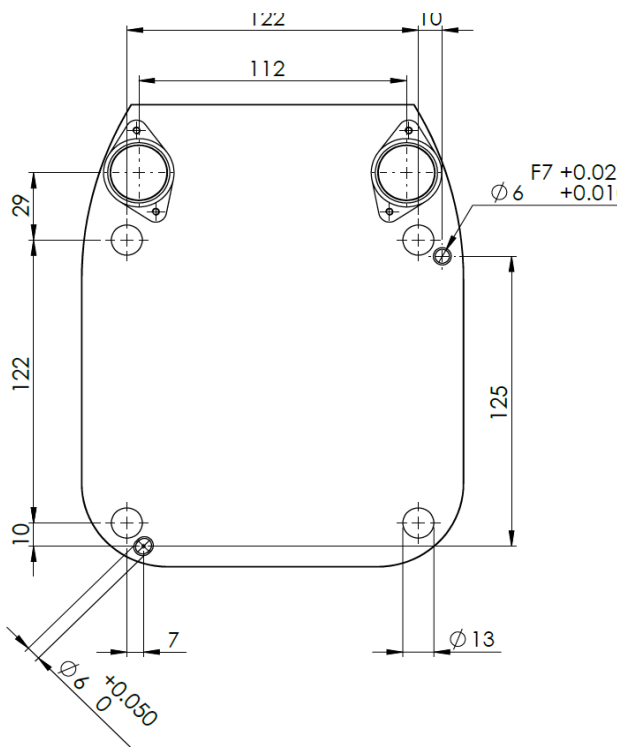

ROBOT HEAD & PORTS

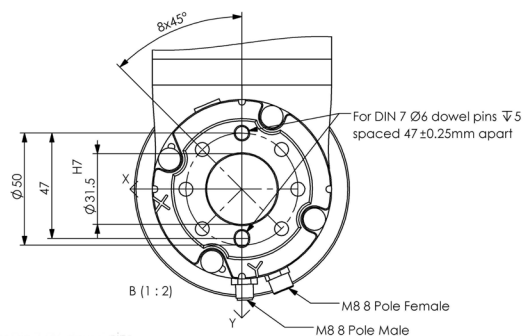

INTERNAL CONNECTIONS

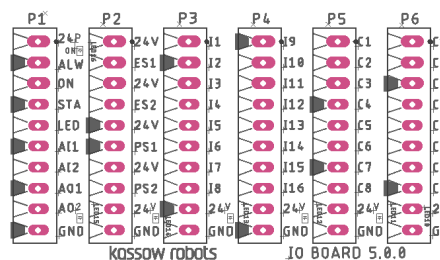

Kassow Robots Aps
Kajakvej 2,
2770 Kastrup/Copenhagen,
DENMARK
+45 20 24 09 95
sales@kassowrobots.com
kassowrobots.com

kassow robots
strong · fast · simple

Joining forces with

rexroth
A Bosch Company