



CL-313 R/F


Emergency Light



Details




Schematic

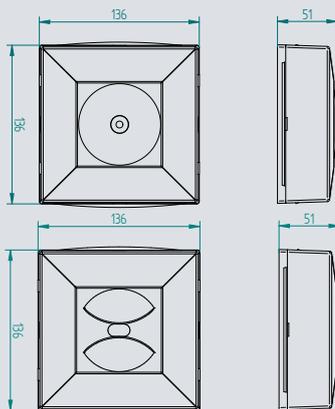

Type	LED emergency light
Mounting	Sidewall, ceiling
Light source	50.000h operational time, 6000K color temperature
Luminous flux	314 lm (R), 329 lm (F)
Warranty	5-years warranty
Dimensions	136mm x 136mm x 51mm
Housing color and material	White, black plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < T _a < 45 °C

LED safety light for the illumination of escape areas. Suitable for surface mounting. It can be ordered with round LED lens or with lens for corridors according to our customers' needs.

Mounting height (m)	2,5	3	4	6	8	10	15
Transverse mounting	↔	6,47	7,4	9,05	10,73	11,49	12,03
	↔	2,92	3,27	3,68	4,03	4,15	0
Axial mounting	↔	5,81	5,77	7,12	9,55	10,84	11,69
	↔	2,34	2,69	3,31	3,95	4,23	0



Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-313R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300028
CL-313R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 1600mA 3 h	10844
CL-313R Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	27mA	-	300140
CL-313R Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	27mA	-	300156
CL-313R Slave/Con/CB/24V	CL-24V CON CB	DC 24-32V	190mA	-	300186
CL-313R Slave/MB	CL-100-400	AC 120-240V	21mA	NIMH 600mA 1 h	300029
CL-313R Slave/MB	CL-100-400	AC 120-240V	21mA	NIMH 1600mA 3 h	10845
CL-313R Slave/RF/MB	CL-100 RF	AC 120-240V	21mA	NIMH 600mA 1 h	-
CL-313R Slave/RF/MB	CL-100 RF	AC 120-240V	21mA	NIMH 1600mA 3 h	-
CL-313R Slave/CB 24V	CL-24V CB	DC 24-32V	190mA	-	300277
CL-313R Slave/CB	CL-600	AC 120-240V	27mA	-	300030
CL-313R Slave/CB AC-DC	CBS-230 AC/DC	AC/DC 120-240V	27mA	-	-
CL-313F Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300024
CL-313F Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 1600mA 3 h	10842
CL-313F Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	27mA	-	300244

Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-313F Slave/Con/CB ACDC	CBS-230 AC/DC	AC/DC 120-240V	27mA	-	300027
CL-313F Slave/Con/CB/24V	CL-24V CON CB	DC 24-32V	190mA	-	300326
CL-313F Slave/MB	CL-100-400	AC 120-240V	21mA	NIMH 600mA 1 h	300025
CL-313F Slave/MB	CL-100-400	AC 120-240V	21mA	NIMH 1600mA 3 h	10843
CL-313F Slave/RF/MB	CL-100RF	AC 120-240V	21mA	NIMH 600mA 1 h	-
CL-313F Slave/RF/MB	CL-100RF	AC 120-240V	21mA	NIMH 1600mA 3 h	-
CL-313F Slave/CB 24V	CL-24V CB	DC 24-32V	190mA	-	300291
CL-313F Slave/CB	CL-600	AC 120-240V	27mA	-	300026
CL-313F Slave/CB AC-DC	CBS-230 AC/DC	AC/DC 120-240V	27mA	-	-