



CL-313 C/R and C/F


Emergency Light



Details




Schematic

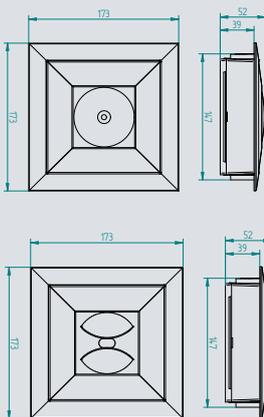

Type	LED emergency light
Mounting	Ceiling recessed
Light source	50.000h operational time, 6000K color temperature
Luminous flux	314 lm (R), 329 lm (F)
Warranty	5-years warranty
Dimensions	173mm x 173mm x 52mm
Housing color and material	White, black plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < T _a < 45 °C

LED safety light for the illumination of escape areas. It can be recessed into the ceiling. It can be ordered with round LED lens or with lens for corridors (C/R or C/F).

Mounting height (m)	2,5	3	4	6	8	10	15
Transverse mounting		13,12	14,9	18,02	22,53	21,75	15,35
		5,87	6,62	7,77	8,06	4,66	1,84
Axial mounting		5,99	5,71	4,77	6,18	6,9	6,63
		1,51	1,73	2,13	2,49	2,18	0,68



Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-313C/R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300020
CL-313C/R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 1600mA 3 h	10840
CL-313C/R Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	27mA	-	300160
CL-313C/R Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	27mA	-	300108
CL-313C/R Slave/Con/CB/24V	Conventional central battery	DC 24-32V	190mA	-	300327
CL-313C/R Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300021
CL-313C/R Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 1600mA 3 h	10841
CL-313C/R Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 600mA 1 h	-
CL-313C/R Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 1600mA 3 h	-
CL-313C/R Slave/CB 24V	Addressable central battery	DC 24-32V	190mA	-	300304
CL-313C/R Slave/CB	Addressable central battery	AC 120-240V	27mA	-	300022
CL-313C/R Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	27mA	-	-
CL-313C/F Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 hour	300016
CL-313C/F Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 1600mA 3 h	300106
CL-313F Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	27mA	-	300244

Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-313C/F Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	27mA	-	300159
CL-313C/F Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	27mA	-	300107
CL-313C/F Slave/Con/CB/24V	Conventional central battery	DC 24-32V	190mA	-	300184
CL-313C/F Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300017
CL-313C/F Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 1600mA 3 h	10839
CL-313C/F Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 600mA 1 hr	-
CL-313C/F Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 1600mA 3 h	-
CL-313C/F Slave/CB 24V	Addressable central battery	DC 24-32V	190mA	-	300296
CL-313C/F Slave/CB	Addressable central battery	AC 120-240V	27mA	-	300018
CL-313C/F Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	27mA	-	-