


CL-4014R


Emergency Light



Details




Schematic

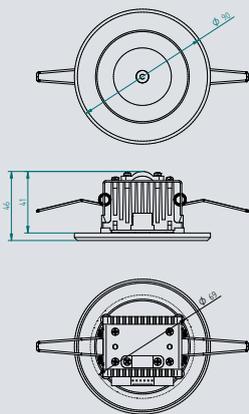

Type	LED emergency light
Mounting	Ceiling recessed
Light source	50.000h operational time, 6000K color temperature
Luminous flux	377 lm
Warranty	2-years warranty
Dimensions	90mm x 69mm x 46mm
Housing color and material	White, black plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < T _a < 45 °C

Aesthetic LED safety light for recessing into the ceiling. It is available with round LED lens. It has a great effective range, its practical design makes it easy to install.

Mounting height (m)	2,5	3	4	6	8	10	15	
Escape route min 1 lux	Transverse mounting	10,06	10,73	11,97	13,3	13,77	13,33	0
	Axial mounting	4,13	4,35	4,75	5,01	4,51	2,63	0
Escape route min 1 lux	Transverse mounting	10,03	10,74	11,97	13,24	13,72	13,23	0
	Axial mounting	4,11	4,32	4,76	4,89	4,36	2,28	0



Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-4014R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300169
CL-4014R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300170
CL-4014R Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	29mA	-	300188
CL-4014R Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	29mA	-	300176
CL-4014R Slave/Con/CB/24V	Conventional central battery	DC 24-32V	230mA	-	300313
CL-4014R Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300166
CL-4014R Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300163
CL-4014R Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 600mA 1 h	-
CL-4014R Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	-
CL-4014R Slave/CB 24V	Addressable central battery	DC 24-32V	230mA	-	300282
CL-4014R Slave/CB	Addressable central battery	AC 120-240V	29mA	-	300172
CL-4014R Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	29mA	-	-