

## CL-9017


## Luminaire



## Details




## Schematic



Type	Exit sign luminaire
Mounting	Sidewall
Light source	50.000h operational time, 6000K color temperature
Warranty	5-years warranty
Dimensions	620mm x 320mm x 80mm
Housing color and material	White plastic
Cable connection	Max. 2.5mm <sup>2</sup> cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < T <sub>a</sub> < 45 °C

The largest LED exit sign of our portfolio is the CL-9017. Due to its size the exit sign is suitable for industrial halls and big buildings with large interior, where the long visibility distance is important (60m). It can be mounted onto the sidewall.

The following pictograms can be selected:

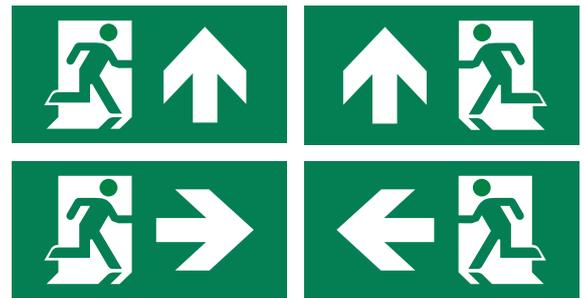

Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-9017 Slave/Con/MB	Conventional main battery	AC 120-240V	65mA	NIMH 1600mA 1-3 h	300211
CL-9017 Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	45mA	-	-
CL-9017 Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	45mA	-	300580
CL-9017 Slave/Con/CB/24V	Conventional central battery	DC 24-32V	290mA	-	300337
CL-9017 Slave/MB	Addressable main battery	AC 120-240V	65mA	NIMH 1600mA 1-3 h	300289
CL-9017 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	65mA	NIMH 1600mA 1-3 h	-
CL-9017 Slave/CB 24V	Addressable central battery	DC 24-32V	290mA	-	300295
CL-9017 Slave/CB	Addressable central battery	AC 120-240V	45mA	-	300004
CL-9017 Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	45mA	-	300579
CL-9017 Slave/Con/MB Flag	Conventional main battery	AC 120-240V	65mA	NIMH 1600mA 1-3 h	-