


## CL-414


## Luminaire



## Details




## Schematic

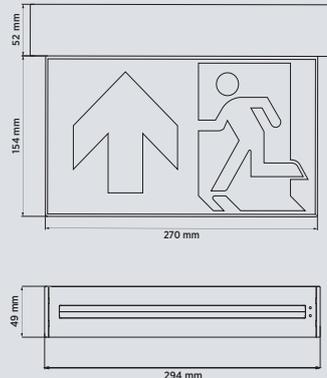

|  |   |
|--|---|
| Type                                       | Exit sign luminaire   |
| Mounting                                   | Ceiling, sidewall, flag, suspended                                  |
| Light source                               | 50.000h operational time, 6000K color temperature                   |
| Warranty                                   | 5-years repair warranty   |
| Dimensions                                 | 294mm x 206mm x 49mm  |
| Housing color and material                 | White or black plastic  |
| Cable connection                           | Max. 2.5mm <sup>2</sup> cross-section solid or sleeved twisted wire |
| Operating mode:                            | Non-maintained / Maintained   |
| Constant nominal ambient temperature range | 0 °C < T <sub>a</sub> < 45 °C                                       |

High-quality double sided LED exit sign. It was designed mainly for buildings with high aesthetic requirements (hotels, business centres). The CL-414 luminaire suitable for types of mounting: to the ceiling, parallel to the sidewall and perpendicularly to the sidewall.

The following pictograms can be selected:

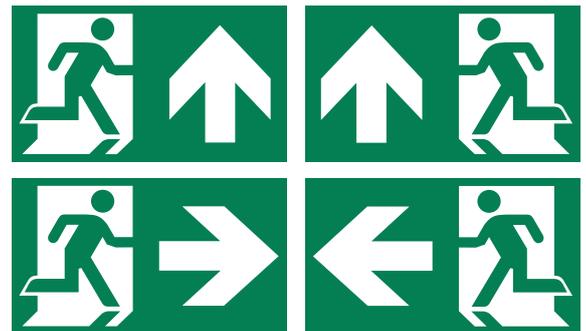

| Product name               | System type                  | Main supply    | Input current | Battery type/time | Product code |
|----------------------------|------------------------------|----------------|---------------|-------------------|--------------|
| CL-414 Slave/Con/MB        | Conventional main battery    | AC 120-240V    | 32mA          | NIMH 600mA 1-3 h  | 300261       |
| CL-414 Slave/Con/CB ACAC   | Conventional central battery | AC 120-240V    | 15mA          | -                 | 300190       |
| CL-414 Slave/Con/CB ACDC   | Conventional central battery | AC/DC 120-240V | 15mA          | -                 | 300153       |
| CL-414 Slave/Con/CB/24V    | CL-24V CON CB                | DC 24-32V      | 80mA          | -                 | 300320       |
| CL-414 Slave/MB            | CL-100 - 400                 | AC 120-240V    | 32mA          | NIMH 600mA 1-3 h  | 300262       |
| CL-414 Slave/RF/MB         | CL-100 RF                    | AC 120-240V    | 32mA          | NIMH 600mA 1-3 h  | 300404       |
| CL-414 Slave/CB 24V        | CL-24V CB                    | DC 24-32V      | 80mA          | -                 | 300272       |
| CL-414 Slave/CB            | CL-600                       | AC 120-240V    | 15mA          | -                 | 300146       |
| CL-414 Slave/CB AC-DC      | CBS-230 AC/DC                | AC/DC 120-240V | 15mA          | -                 | 300272       |
| CL-414 Slave/Con/MB Trilux | Conventional main battery    | AC 120-240V    | 32mA          | NIMH 600mA 1-3 h  | 300341       |
| CL-414 Slave/CB 24V Trilux | CL-24V CB                    | DC 24-32V      | 80mA          | -                 | 300548       |
| CL-414 Slave/MB            | CL-100 - 400                 | AC 120-240V    | 32mA          | NIMH 600mA 1-3 h  | 300319       |