


CL-417


Luminaire



Details




Schematic

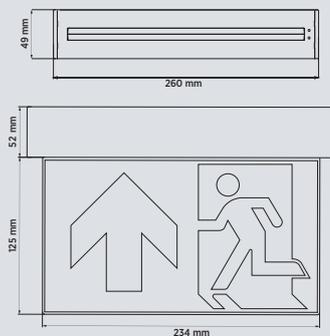

Type	Exit sign luminaire
Mounting	Sidewall
Light source	50.000h operational time, 6000K color temperature
Warranty	5-years warranty
Dimensions	260mm x 177mm x 49mm
Housing color and material	White or black plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < T _a < 45 °C

High-quality double sided LED exit sign. It was designed mainly for buildings with high aesthetic requirements (hotels, business centres). The CL-417 luminaire suitable for types of mounting: to the ceiling, parallel to the sidewall and perpendicularly to the sidewall. The suspension accessories are sold separately.

The following pictograms can be selected:

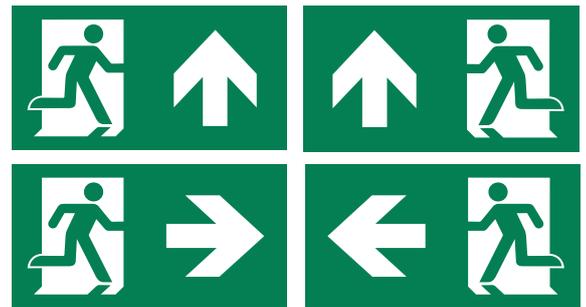

Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-417 Slave/Con/MB	Conventional main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300270
CL-417 Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	15mA	-	300402
CL-417 Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	15mA	-	300308
CL-417 Slave/Con/CB/24V	Conventional central battery	DC 24-32V	80mA	-	300312
CL-417 Slave/MB	Addressable main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300287
CL-417 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	-
CL-417 Slave/CB 24V	Addressable central battery	DC 24-32V	80mA	-	300280
CL-417 Slave/CB	Addressable central battery	AC 120-240V	15mA	-	300297
CL-417 Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	15mA	-	-
CL-417 Slave/Con/MB Trilux	Conventional main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	-
CL-417 Slave/CB 24V Trilux	Addressable central battery	DC 24-32V	80mA	-	-
CL-417 Slave/MB Trilux	Addressable main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	-