


CL-414C


Luminaire



Details




Schematic



Type	Exit sign luminaire
Mounting	Ceiling recessed
Light source	50.000h operational time, 6000K color temperature
Warranty	5-years warranty
Dimensions	332mm x 206mm x 86mm
Housing color and material	White or black plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < T _a < 45 °C

The CL-414C light is the ceiling recessed version of the CL-414 light.

The following pictograms can be selected:

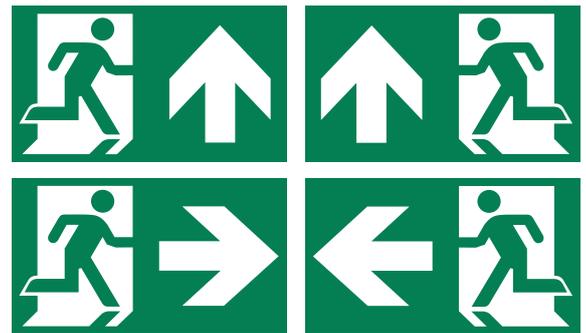

Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-414C Slave/Con/MB	Conventional main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300149
CL-414C Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	15mA	-	300403
CL-414C Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	15mA	-	300154
CL-414C Slave/Con/CB/24V	Conventional central battery	DC 24-32V	80mA	-	300333
CL-414C Slave/MB	Addressable main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300268
CL-414C Slave/RF/MB	Addressable wireless main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300529
CL-414C Slave/CB 24V	Addressable central battery	DC 24-32V	80mA	-	300271
CL-414C Slave/CB	Addressable central battery	AC 120-240V	15mA	-	300147
CL-414C Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	15mA	-	-