


CL-6017


Luminaire



Details




Schematic



Type	Exit sign luminaire
Mounting	Sidewall
Light source	50.000h operational time, 6000K color temperature
Warranty	2-years warranty
Dimensions	337mm x 170mm x 62mm
Housing color and material	White plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < Ta < 45 °C

The CL-6017 is an elegant one-sided, sidewall-mounted LED exit sign with IP65 protection. Suitable for dry and wet locations (rest room, basement, garage) and for outdoor use as well.

The following pictograms can be selected:

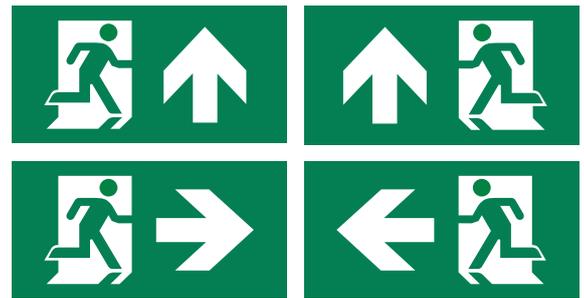

Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-6017 Slave/Con/MB	Conventional main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300253
CL-6017 Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	15mA	-	300220
CL-6017 Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	15mA	-	300102
CL-6017 Slave/Con/CB/24V	Conventional central battery	DC 24-32V	80mA	-	300325
CL-6017 Slave/MB	Addressable main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300254
CL-6017 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	-
CL-6017 Slave/CB 24V	Addressable central battery	DC 24-32V	80mA	-	300273
CL-6017 Slave/CB	Addressable central battery	AC 120-240V	15mA	-	300175
CL-6017 Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	15mA	-	-