



Jupiter 470 vertical


vægt: 90 kg

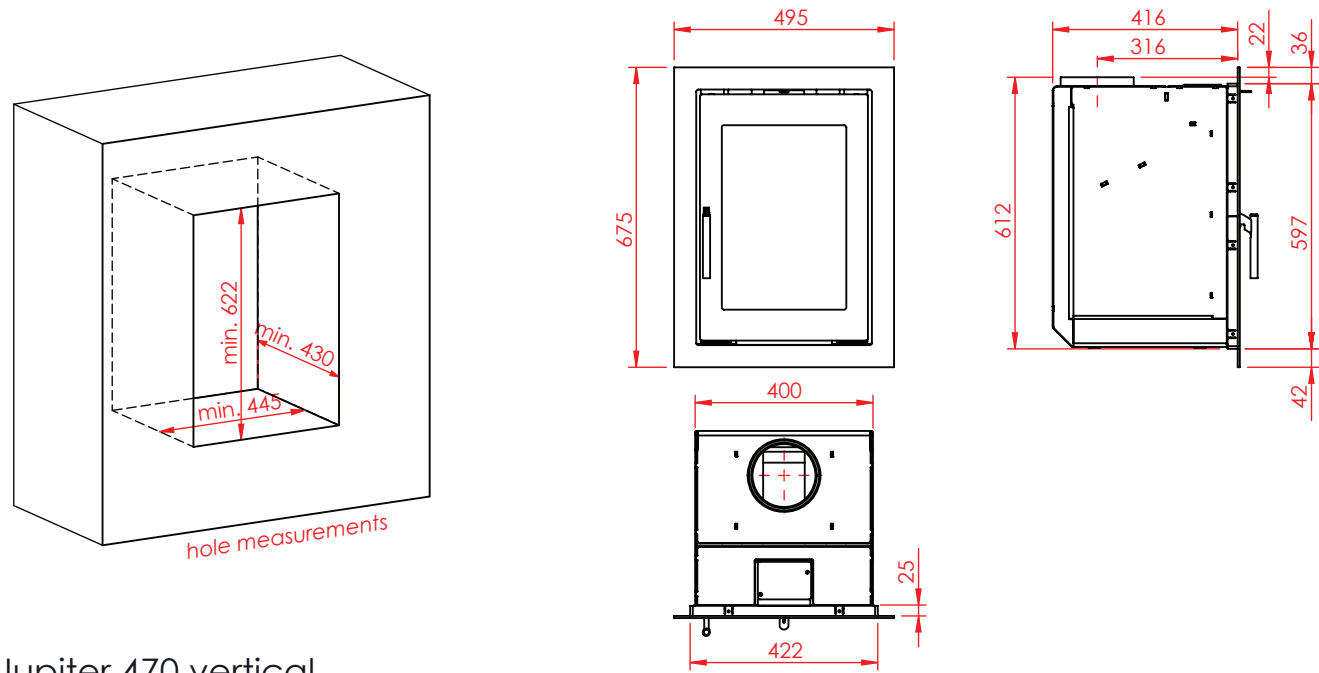

Jupiter 470 vertical

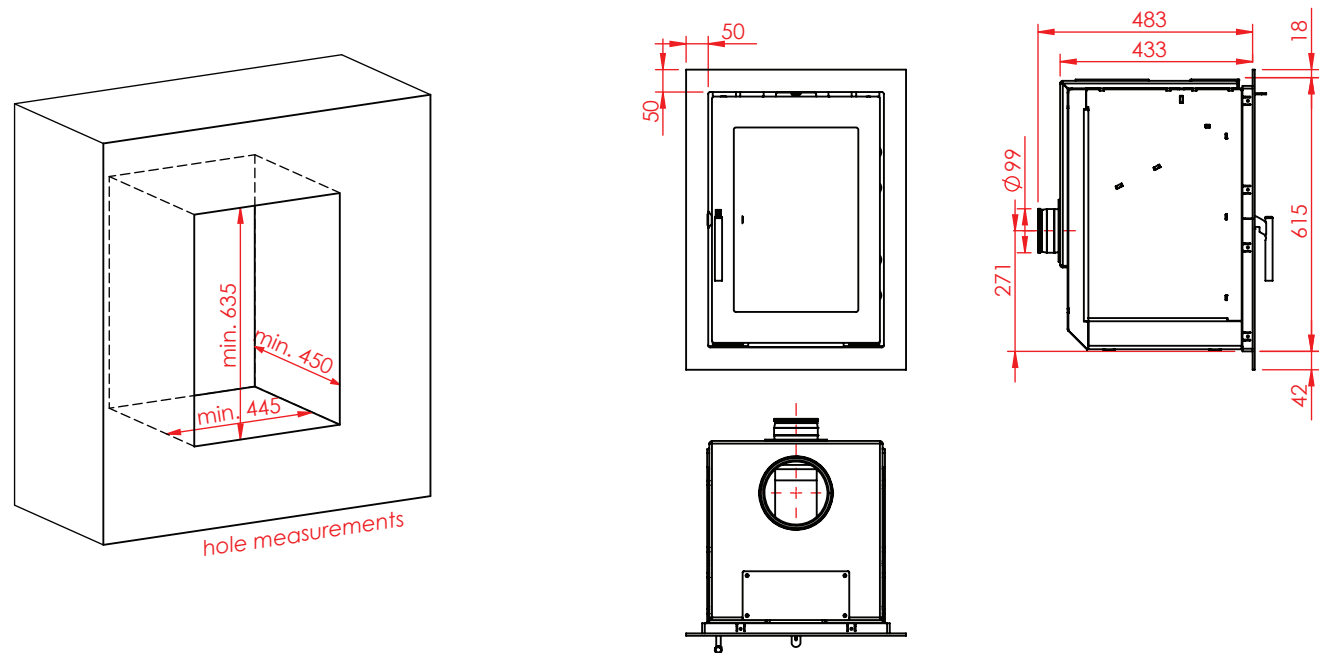

Jupiter 470 vertical, airbox behind

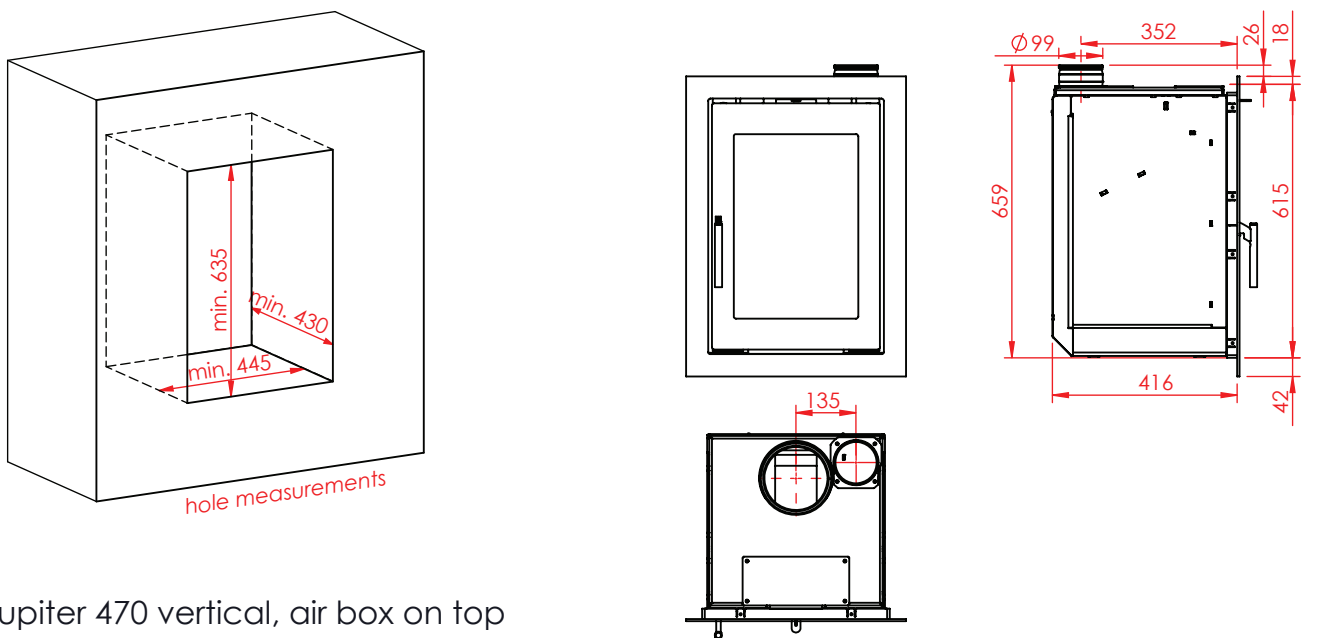


Jupiter 470 vertical, air box on top

# Clearance to combustible materials


## Jupiter fireplace inserts

| standard                     | dS  | dS <sup>1</sup> | dF     | dB     | dP   | dL     | dC     | dR |
|------------------------------|-----|-----------------|--------|--------|------|--------|--------|----|
|                              |     | note 1          | note 2 | note 2 |      | note 3 | note 4 |    |
| Jupiter 470 vertical small   | 400 | 250             | 0/650  | 300    | 1150 | 700    | 400    | 0  |
| Jupiter 470 vertical         | 400 | 250             | 0/650  | 300    | 1150 | 700    | 400    | 0  |
| Jupiter 550 vertical         | 400 | 250             | 0/650  | 300    | 1150 | 700    | 400    | 0  |
| Jupiter 470 og 470 IR        | 400 | 250             | 0/650  | 300    | 1200 | 700    | 400    | 0  |
| Jupiter 550                  | 400 | 250             | 0/650  | 300    | 1200 | 700    | 400    | 0  |
| Jupiter 470 with curved door | 400 | 250             | 0/650  | 300    | 1200 | 700    | 400    | 0  |
| Jupiter 550 with curved door | 400 | 250             | 0/650  | 300    | 1200 | 700    | 400    | 0  |
| Jupiter 470 XL og 470 XL IR  | 400 | 250             | 0/650  | 300    | 1200 | 700    | 400    | 0  |
| Jupiter 550 XL               | 400 | 250             | 0/650  | 300    | 1200 | 700    | 400    | 0  |
| Jupiter 470 XL soft          | 400 | 250             | 0/650  | 300    | 1200 | 700    | 400    | 0  |
| Jupiter 550 XL soft          | 400 | 250             | 0/650  | 300    | 1200 | 700    | 400    | 0  |


may only be installed in connection with non-combustible material. 50 mm Super-Isol or equivalent.

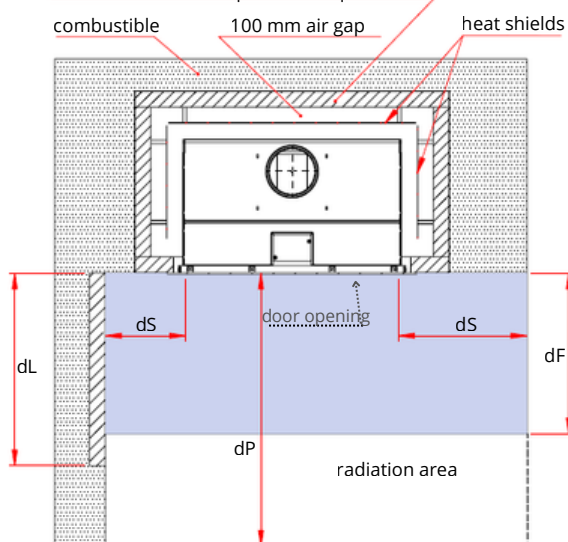

may only be installed in connection with non-combustible material. 50 mm Super-Isol or equivalent.

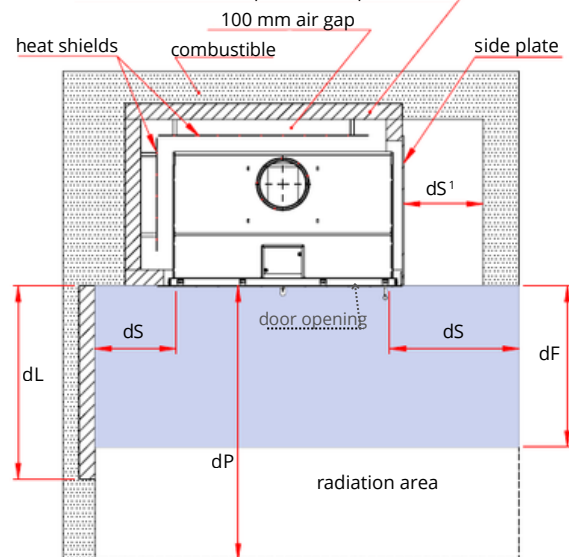

may only be installed in connection with non-combustible material. 50 mm Super-Isol or equivalent.

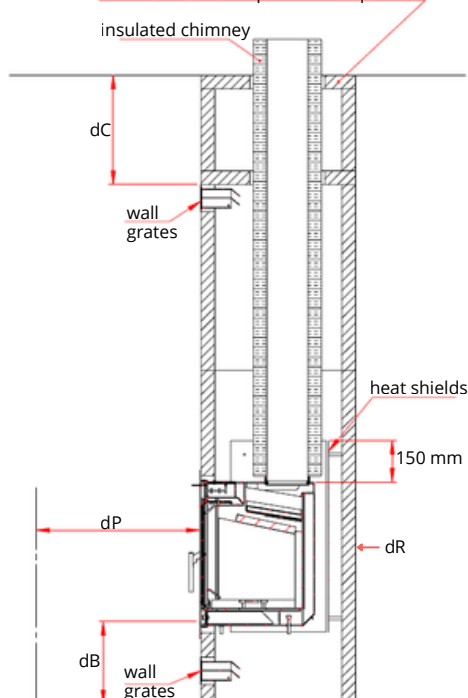

Note 1: dimension measured at a closed side plate  
- measured from the edge of the door

*Be aware that the **dS** clearances in front of the insert must still be respected.*

Note 2: safety distance to non-combustible floor  
- measured from the floor to the underside of the door edge:

**dB** ≥ 300 mm = **dF**: 0 mm

**dB** < 300 mm = **dF**: 650 mm


Note 3: measured from the front edge of the door when  
**dS** < 400 mm

Note 4: measured from the top edge of the wall grates

Heat shields: on all three sides, positioned from the bottom of the stove up to 150 mm above the top of the stove

## Safety distance to staircase/combustible ceiling

If combustible staircases or a combustible ceiling are located above the fireplace insert – measured from the top edge of the door to the nearest combustible part of the staircase: **dC** min. 600 mm

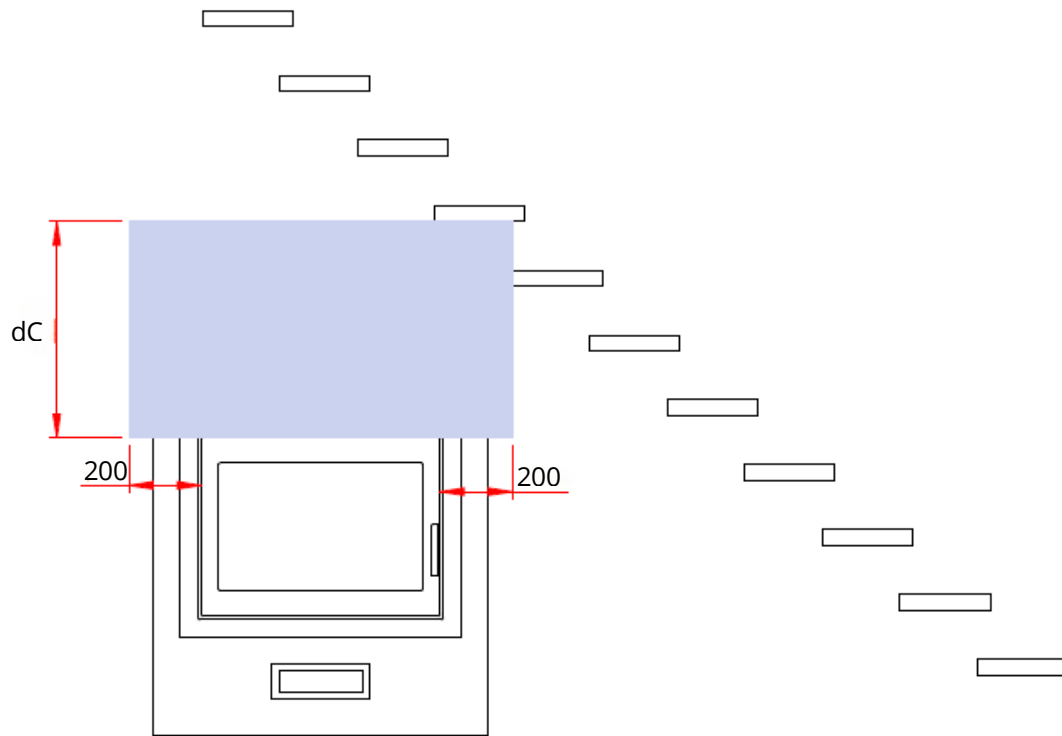

front view example at staircase