



Jupiter 550 XL with fixed glass 2 sides


weight: 120 kg

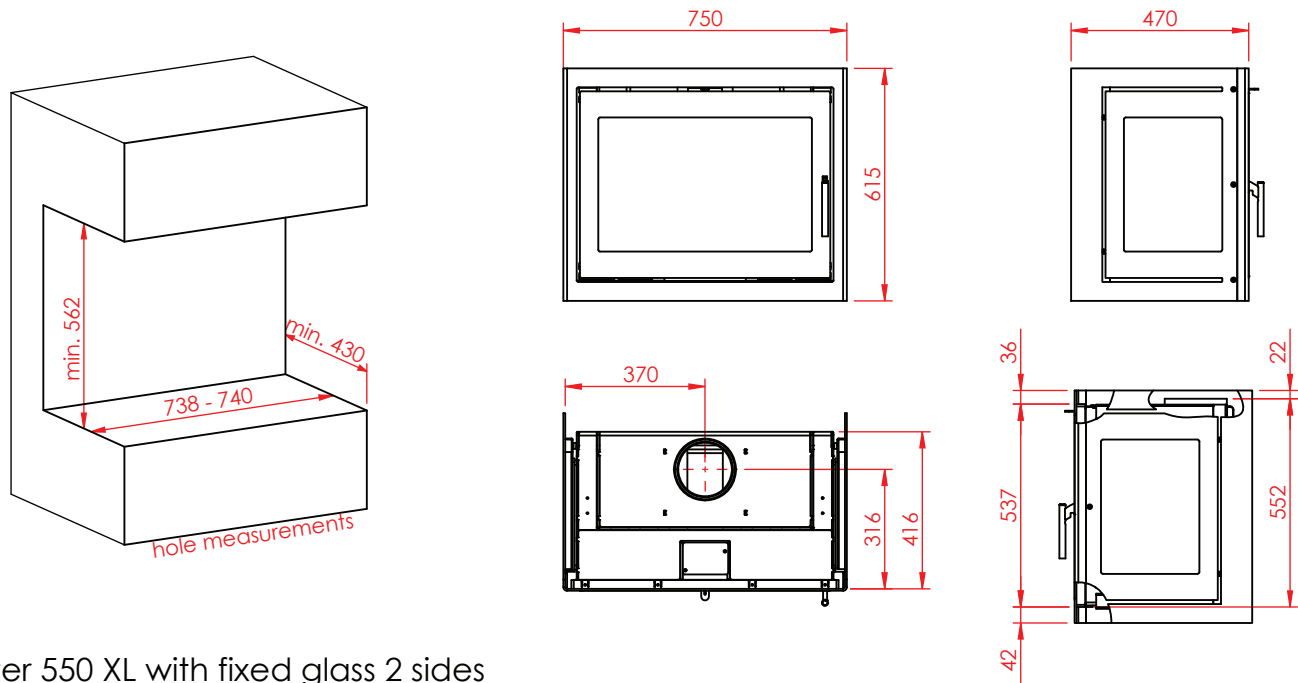

Jupiter 550 XL with fixed glass 2 sides

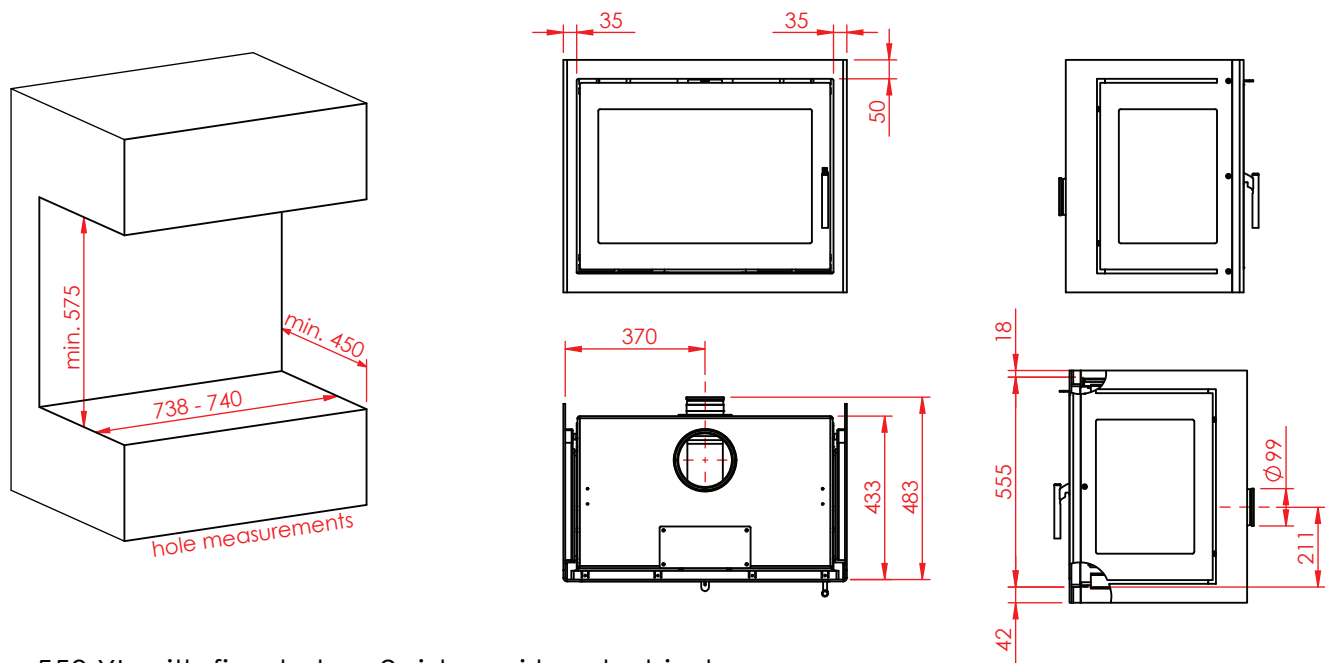


Jupiter 550 XL with fixed glass 2 sides, airbox behind

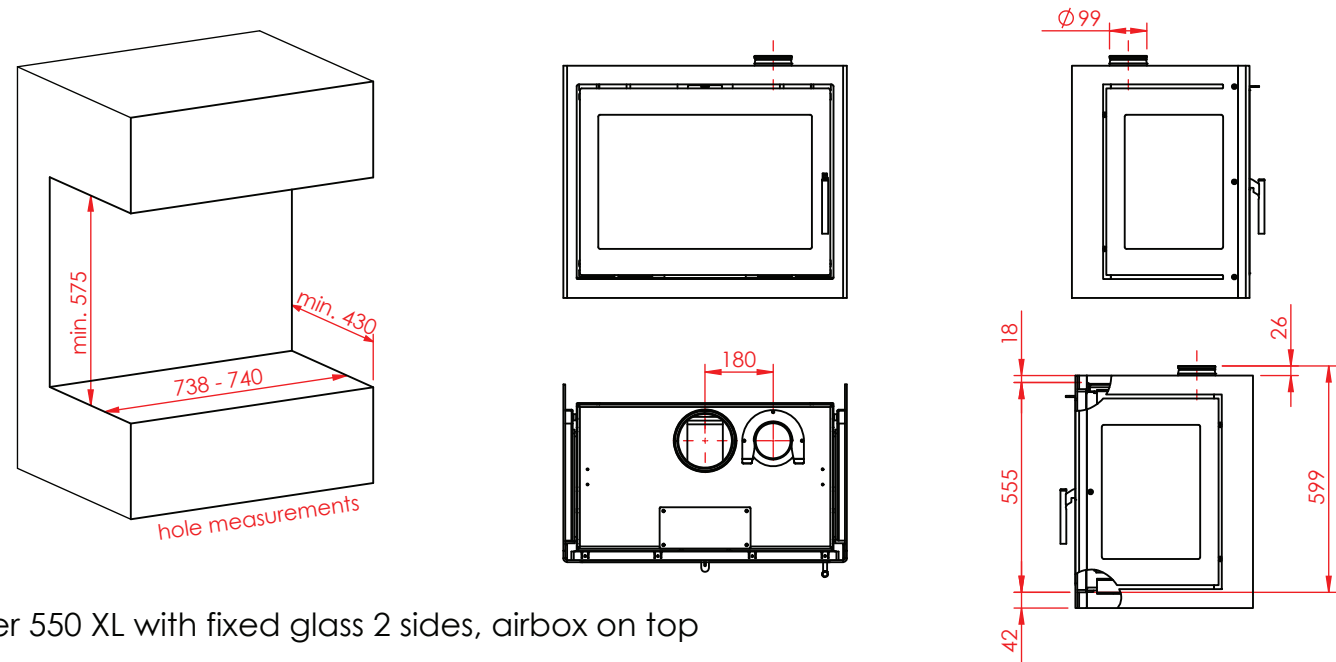

Jupiter 550 XL with fixed glass 2 sides, airbox on top

# Clearance to combustible materials

| Jupiter fireplace inserts<br>with fixed glass 2 sides | dF     | dB  | dP   | dP <sub>5</sub> | dC     | dR | K      |
|---|--------|-----|------|-----------------|--------|----|--------|
|   | note 2 |     |      | note 5          | note 4 |    | note K |
| Jupiter 470 vertical                                  | 0/650  | 300 | 1150 | 850             | 400    | 0  | 150    |
| Jupiter 550 vertical                                  | 0/650  | 300 | 1150 | 850             | 400    | 0  | 150    |
| Jupiter 470   | 0/650  | 300 | 1200 | 850             | 400    | 0  | 150    |
| Jupiter 550   | 0/650  | 300 | 1200 | 850             | 400    | 0  | 150    |
| Jupiter 470 XL  | 0/650  | 300 | 1300 | 650             | 400    | 0  | 150    |
| Jupiter 550 XL  | 0/650  | 300 | 1300 | 650             | 400    | 0  | 150    |

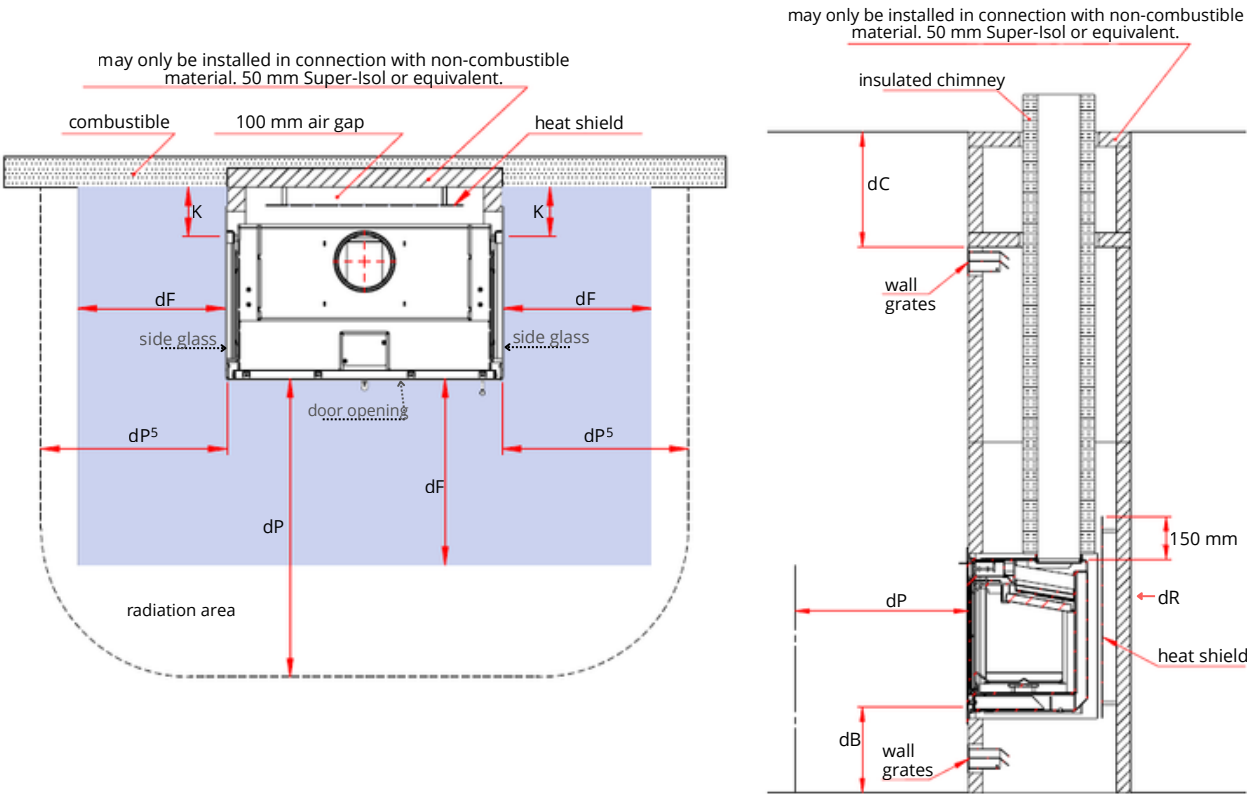

Note 2: safety distance to non-combustible floor - measured from the floor to the underside of the door edge:

$$dB \geq 300 \text{ mm} = dF: 0 \text{ mm}$$

$$dB < 300 \text{ mm} = dF: 650 \text{ mm}$$

Note 4: measured from the top edge of the wall grates


Note 5: side glass furniture clearance

Note K: measured from the groove edge

Heat shield: on the rear side, positioned from the bottom of the stove up to 150 mm above the top of the stove.

## Safety distance to staircase/combustible ceiling

If combustible staircases or a combustible ceiling are located above the fireplace insert – measured from the top edge of the door to the nearest combustible part of the staircase: **dC** min. 600 mm

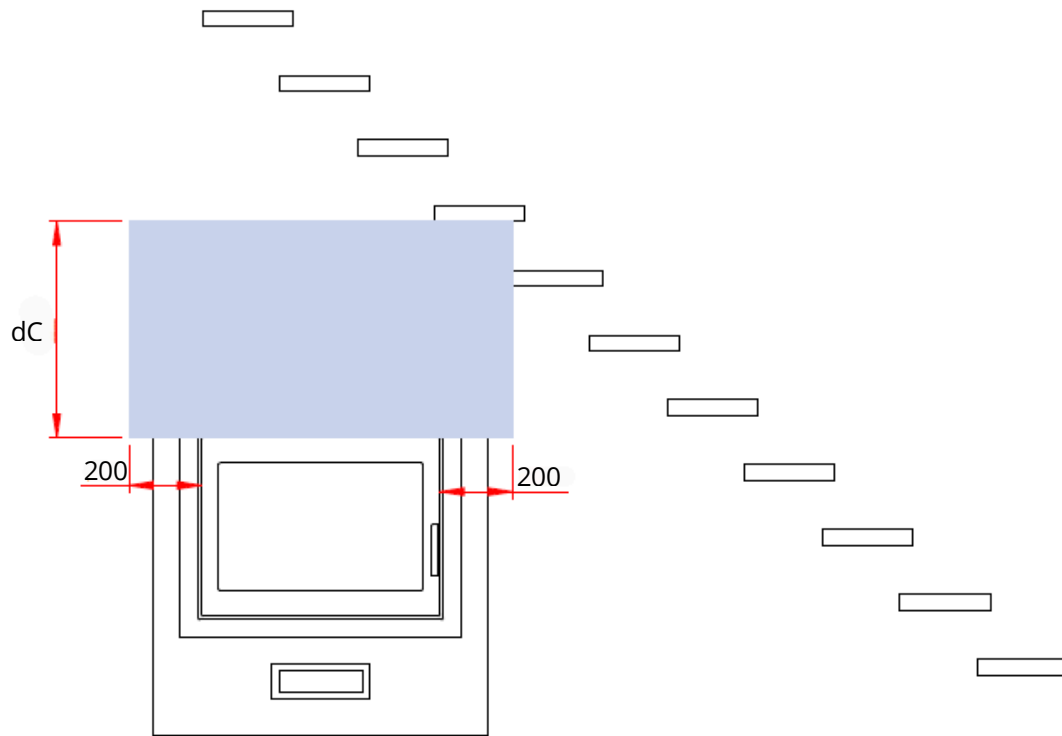

front view example at staircase