



Jupiter 550 vertical with fixed glass 2 sides


weight: 120 kg

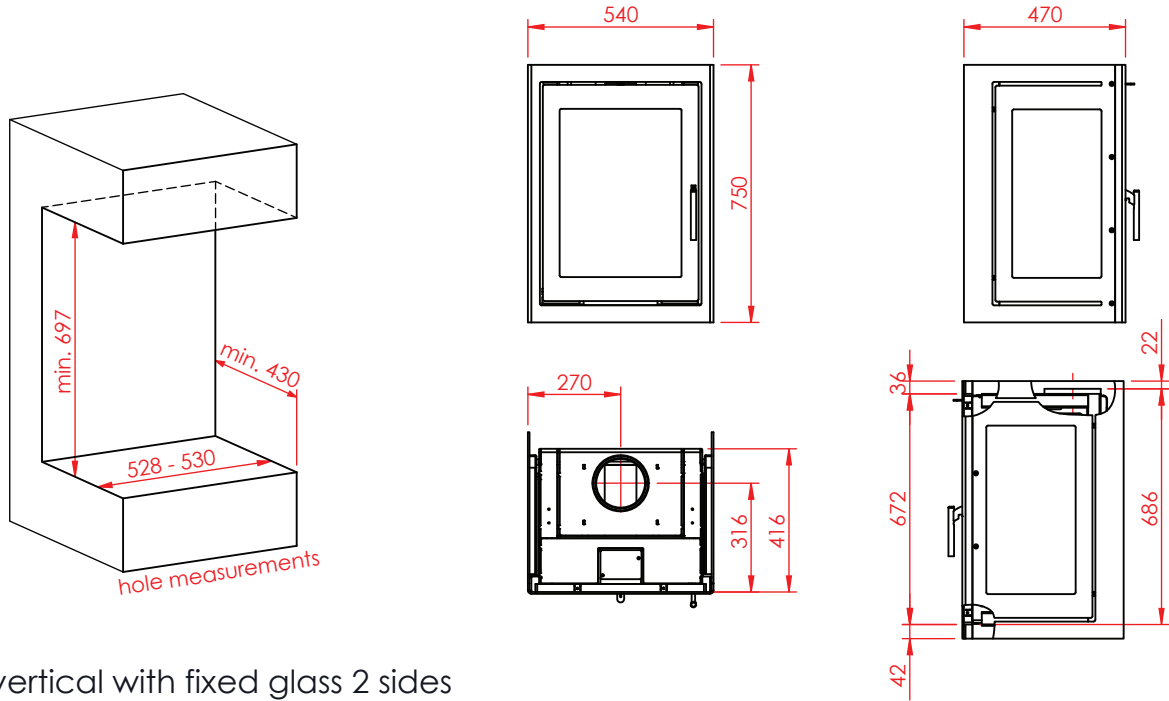

Jupiter 550 vertical with fixed glass 2 sides

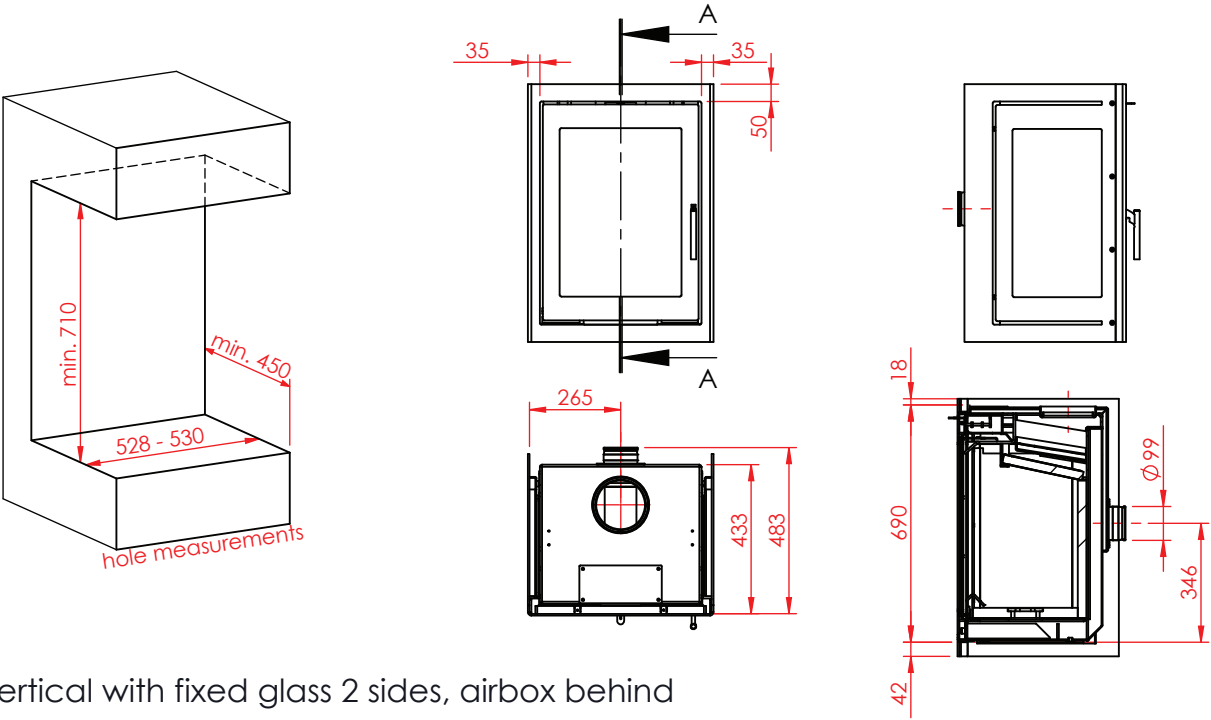


Jupiter 550 vertical with fixed glass 2 sides, airbox behind

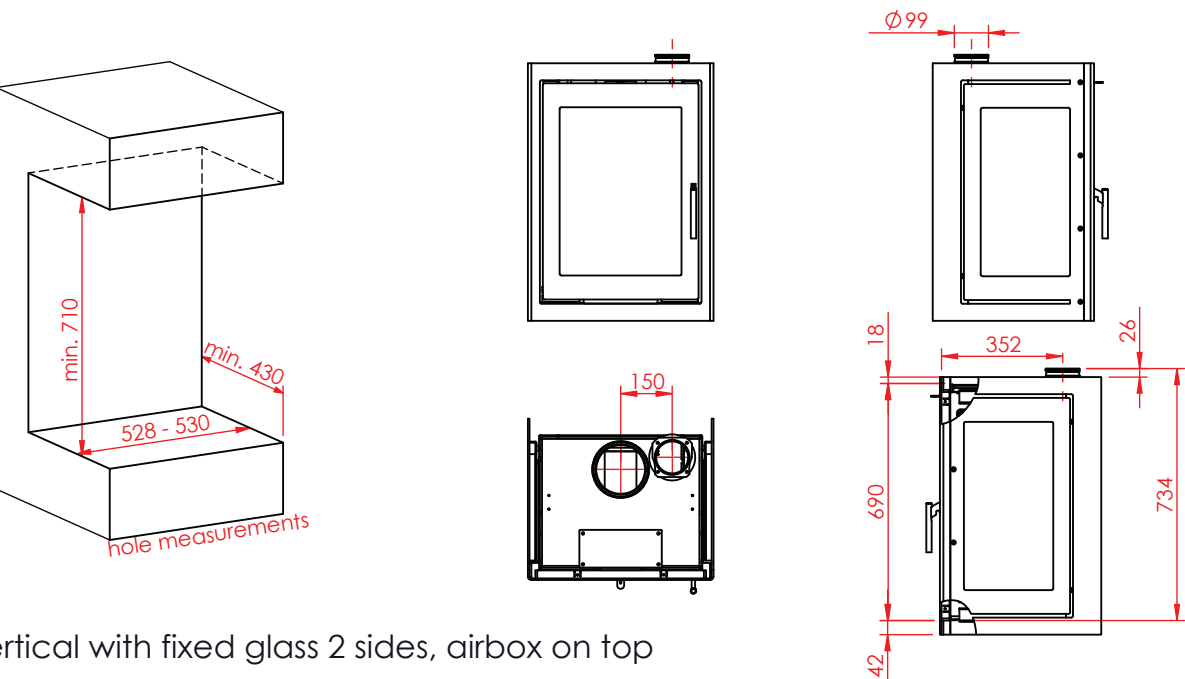

Jupiter 550 vertical with fixed glass 2 sides, airbox on top

Clearance to combustible materials

Jupiter fireplace inserts with fixed glass 2 sides	dF	dB	dP	dP ₅	dC	dR	K
	note 2			note 5	note 4		note K
Jupiter 470 vertical	0/650	300	1150	850	400	0	150
Jupiter 550 vertical	0/650	300	1150	850	400	0	150
Jupiter 470	0/650	300	1200	850	400	0	150
Jupiter 550	0/650	300	1200	850	400	0	150
Jupiter 470 XL	0/650	300	1300	650	400	0	150
Jupiter 550 XL	0/650	300	1300	650	400	0	150

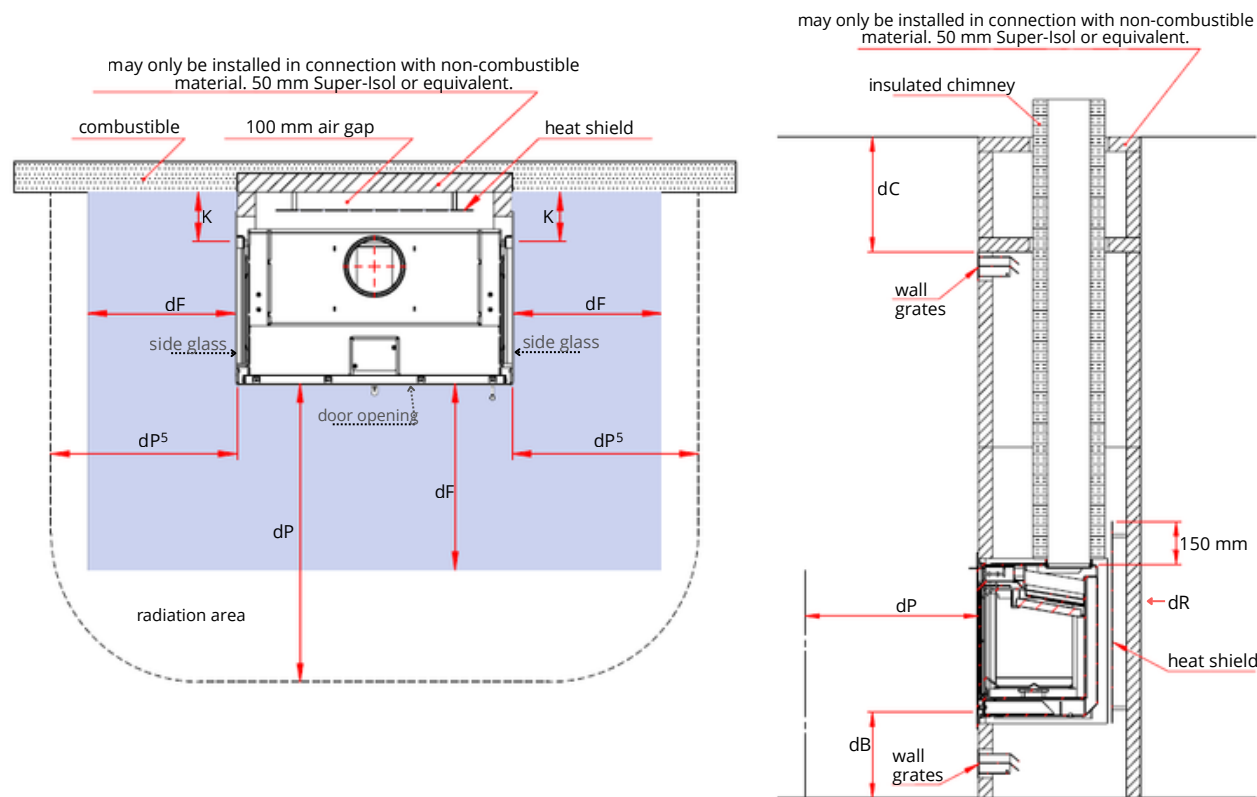

Note 2: safety distance to non-combustible floor - measured from the floor to the underside of the door edge:

$$dB \geq 300 \text{ mm} = dF: 0 \text{ mm}$$

$$dB < 300 \text{ mm} = dF: 650 \text{ mm}$$

Note 4: measured from the top edge of the wall grates


Note 5: side glass furniture clearance

Note K: measured from the groove edge

Heat shield: on the rear side, positioned from the bottom of the stove up to 150 mm above the top of the stove.

Safety distance to staircase/combustible ceiling

If combustible staircases or a combustible ceiling are located above the fireplace insert – measured from the top edge of the door to the nearest combustible part of the staircase: **dC** min. 600 mm

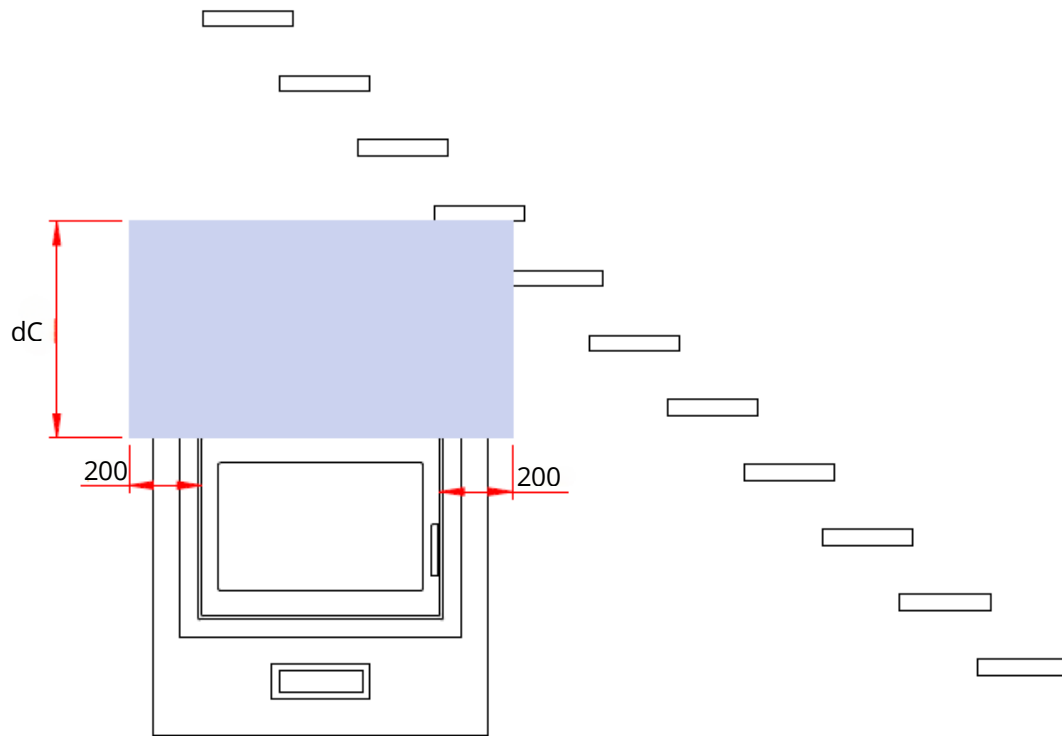

front view example at staircase