


Jupiter 550 with fixed glass 1 side


weight: 100 kg

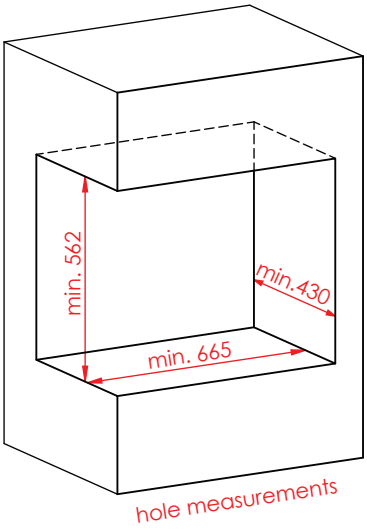


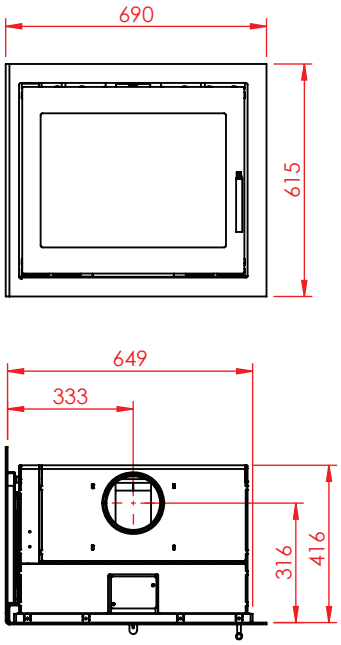


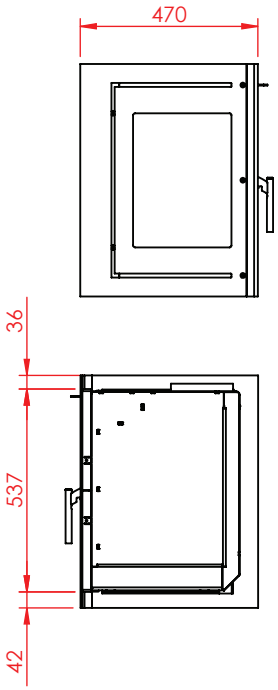


Jupiter 550 with fixed glass 1 side

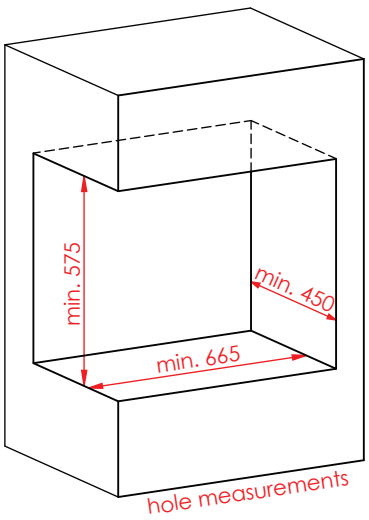


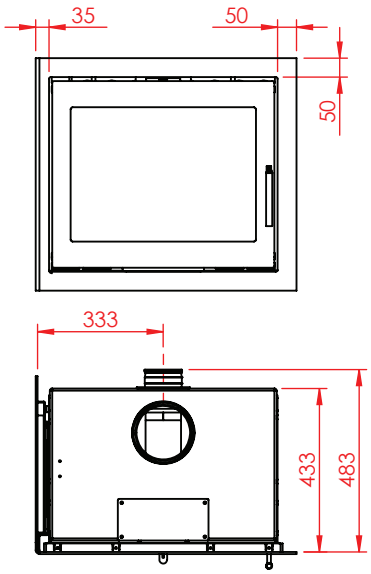


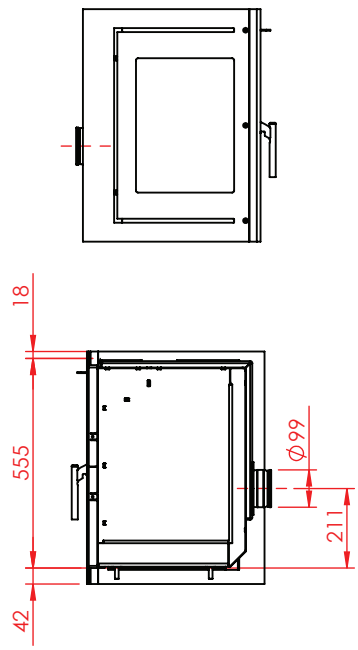

Jupiter 550 with fixed glass 1 side, airbox behind

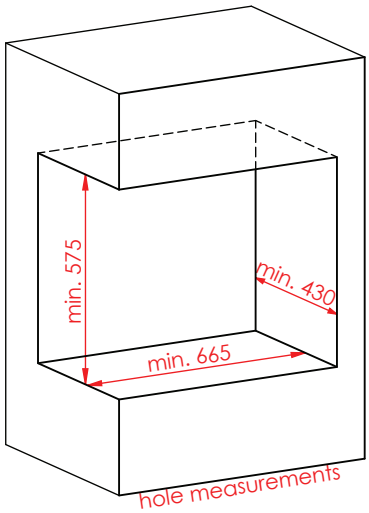

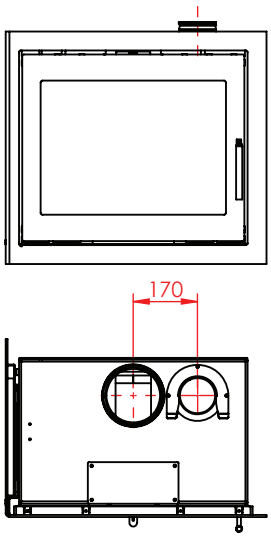


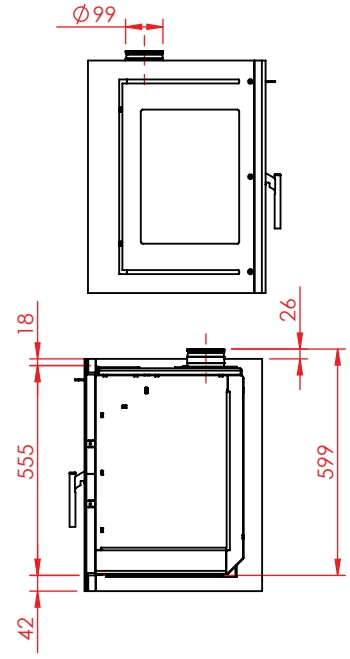



Jupiter 550 with fixed glass 1 side, airbox on top

Clearance to combustible materials

Jupiter fireplace inserts with fixed glass 1 side	dS	dS[1] note 1	dF note 2	dB note 2	dP	dP[5] note 5	dL note 3	dC note 4	dR	K note K
Jupiter 470 vertical	400	250	0/650	300	1150	850	700	400	0	150
Jupiter 550 vertical	400	250	0/650	300	1150	850	700	400	0	150
Jupiter 470	400	250	0/650	300	1200	850	700	400	0	150
Jupiter 550	400	250	0/650	300	1200	850	700	400	0	150
Jupiter 470 XL	400	250	0/650	300	1300	650	700	400	0	150
Jupiter 550 XL	400	250	0/650	300	1300	650	700	400	0	150

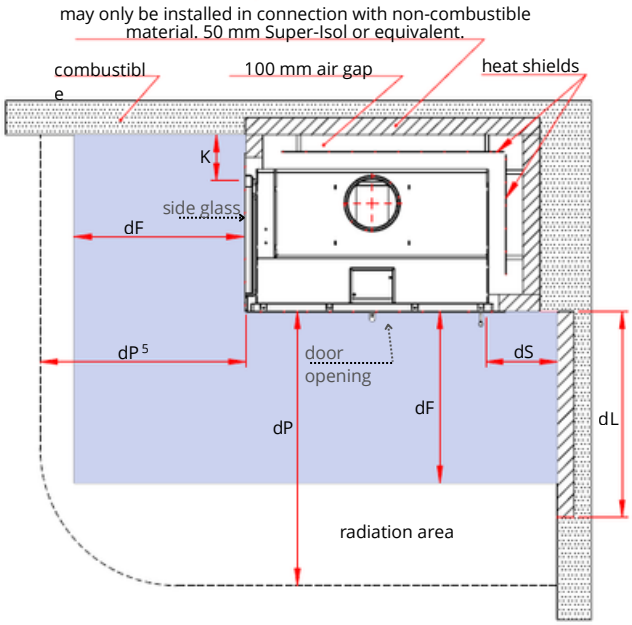

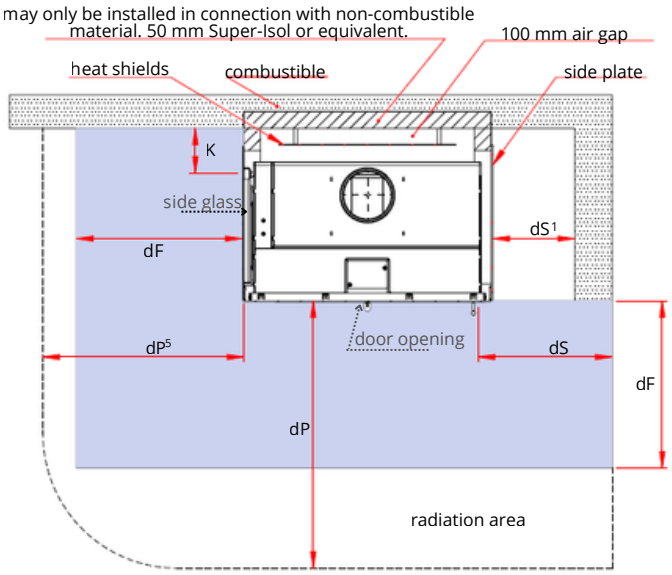

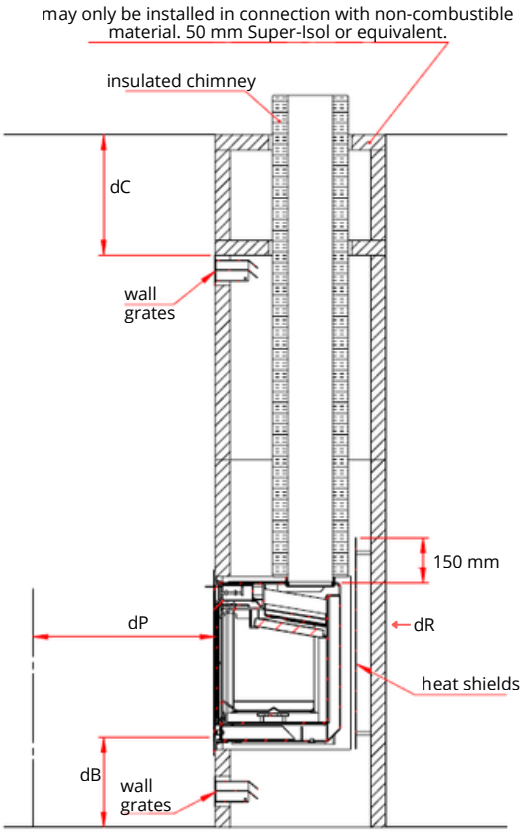

Note 1: dimension measured at a closed side plate
- measured from the edge of the door

*Be aware that the **dS** clearances in front of the insert must still be respected.*

Note 2: safety distance to combustible floor
- measured from the floor to the underside of the door edge:

dB *≥ 300 mm =* ***dF****: 0 mm*
dB *< 300 mm =* ***dF:*** *650 mm*

Note 3: measured from the front edge of the door when ***dS*** < 400 mm

Note 4: measured from the top edge of the wall grates

Note 5: side glass furniture clearance


Note K: measured from the groove edge

Heat shields: on two sides, positioned from the bottom of the stove up to 150 mm above the top of the stove.

To ensure correct air circulation within the fireplace cavity, at least 470 cm² of ventilation must be provided below and 630 cm² above the insert. The ventilation openings must be positioned as high as possible, but at least 400 mm from the ceiling.

Sikkerhedsafstand til trappe/brandbart dæk

Hvis der findes brændbare trapper/ et brandbart dæk over pejseindsatsen - målt fra lågens overkant til nærmeste brændbare del af trappen: **dC** min 600 mm

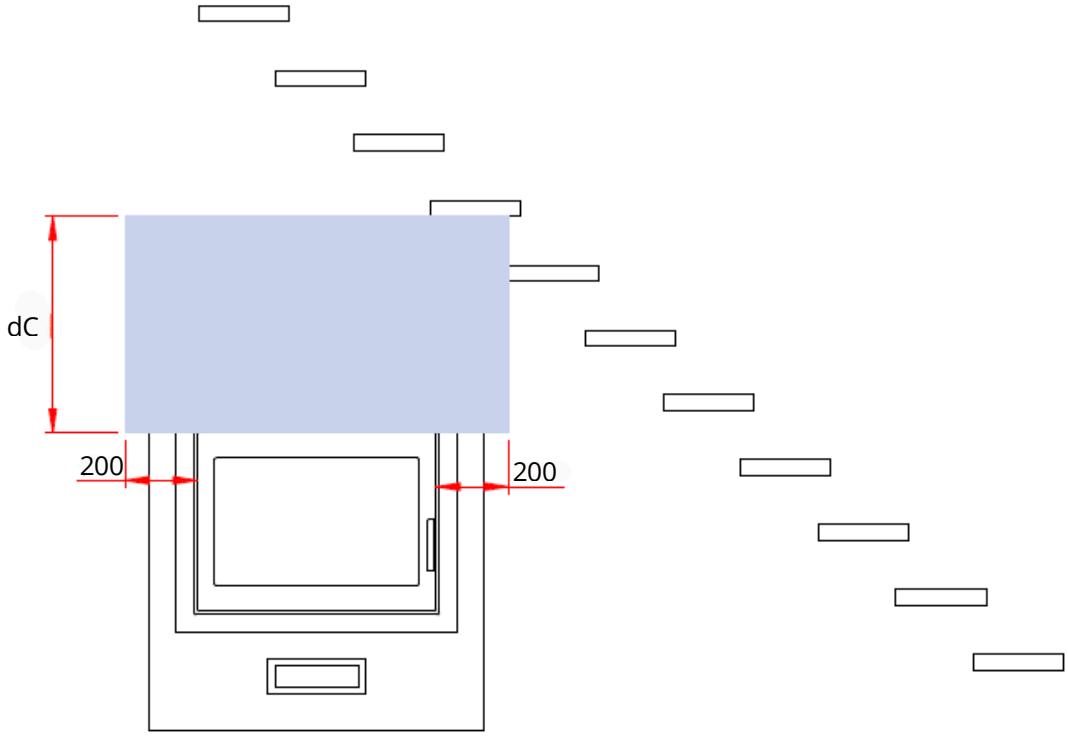

eksempel set forfra ved trappe