

GREEN  
TECH  
SOLUTION

*n*JØRD



# TECHNOLOGY SCREENING

FWN ARCTIC  
IMO NUMBER 9931484  
AUGUST 2025

# EXECUTIVE SUMMARY

Njord has completed a Technology Screening for vessel FWN Arctic. Below are the key findings.

## KEY FINDINGS

8

Number of techs.  
found relevant

15.0

Savings potential in %

5.05

Return on Investment  
in Years

845,000

167,361

Total Investment in USD

Yearly Bunker Savings in USD



# NJORD SCORE

Njord Score	A	B	C	D	E
Remaining Savings Potential	< 3%	< 6%	< 9%	< 12%	+ 12%

## The Njord Score of vessel FWN ARCTIC is D.

The score given is based on how much the vessel can improve its efficiency through the application of a combined Energy Savings Technology package, that does not supersede 2.5 years ROI.

4

Number of techs.  
found commercially  
viable

10.2

Savings potential  
in %

2.33

ROI in  
years

E

Benchmark  
score

*The figures above highlight the total number of commercially viable technologies yet to be explored, their combined savings impact and ROI. The benchmark Njord Score reflects how similar vessels, which Njord has worked on, are currently rated.*

READ MORE ABOUT THE  
NJORD SCORE HERE





<b>1</b>	<b>EXECUTIVE SUMMARY</b>	<b>2</b>
<b>2</b>	<b>NJORD SCORE</b>	<b>3</b>
<b>3</b>	<b>GENERAL INFORMATION</b>	<b>5</b>
<b>4</b>	<b>VESSEL PARTICULARS</b>	<b>6</b>
<b>5</b>	<b>BUSINESS CASE</b>	<b>8</b>
<b>6</b>	<b>REGULATORY IMPACT</b>	<b>9</b>
<b>7</b>	<b>BASIC TECHNOLOGIES</b>	<b>12</b>
<b>8</b>	<b>NEXT STEP - NJORD'S SOLUTION DESIGN</b>	<b>14</b>



# GENERAL INFORMATION

## METHODOLOGY

This Technology Screening is based on Njord's experience of +500 vessel assessments and +200 Energy Efficiency Technologies (EETs) installations. For FWN ARCTIC, Njord has utilized insights from work completed on similar vessels in terms of segment, size, and trading patterns. To avoid overlapping savings when applying multiple technologies, all technologies are prioritized based on impact. For example, if Technology X (priority 1) has a 10% individual impact and Technology Y (priority 2) has a 5% individual impact, Y's effect is calculated on the remaining 90% of fuel consumption. This approach ensures accuracy when applying multiple EETs and the avoidance of counting savings twice. Novel technologies have been considered for the vessel in a separate appendix.

## ASSUMPTIONS

The Technology Screening is based on data provided by Spliethoff's Bevrachtungskantoor B.V. to Njord.

Equipment and installation prices are based on average figures from recent projects, and includes all-in costs (equipment, logistics, and installation). Final prices will depend on the specific project, volume, and negotiations.

The saving potential is divided across two technology categories:


**Direct Savings Technologies (DS)** directly impact vessel performance post-installation and may influence EEXI.

**Enabled Savings Technologies (ES)** improve technical and/or operational efficiency.

The following bunker prices have been considered for the cost calculation:

VLSFO – 499 USD/MT

EU Carbon Price – 82.00 USD/MT

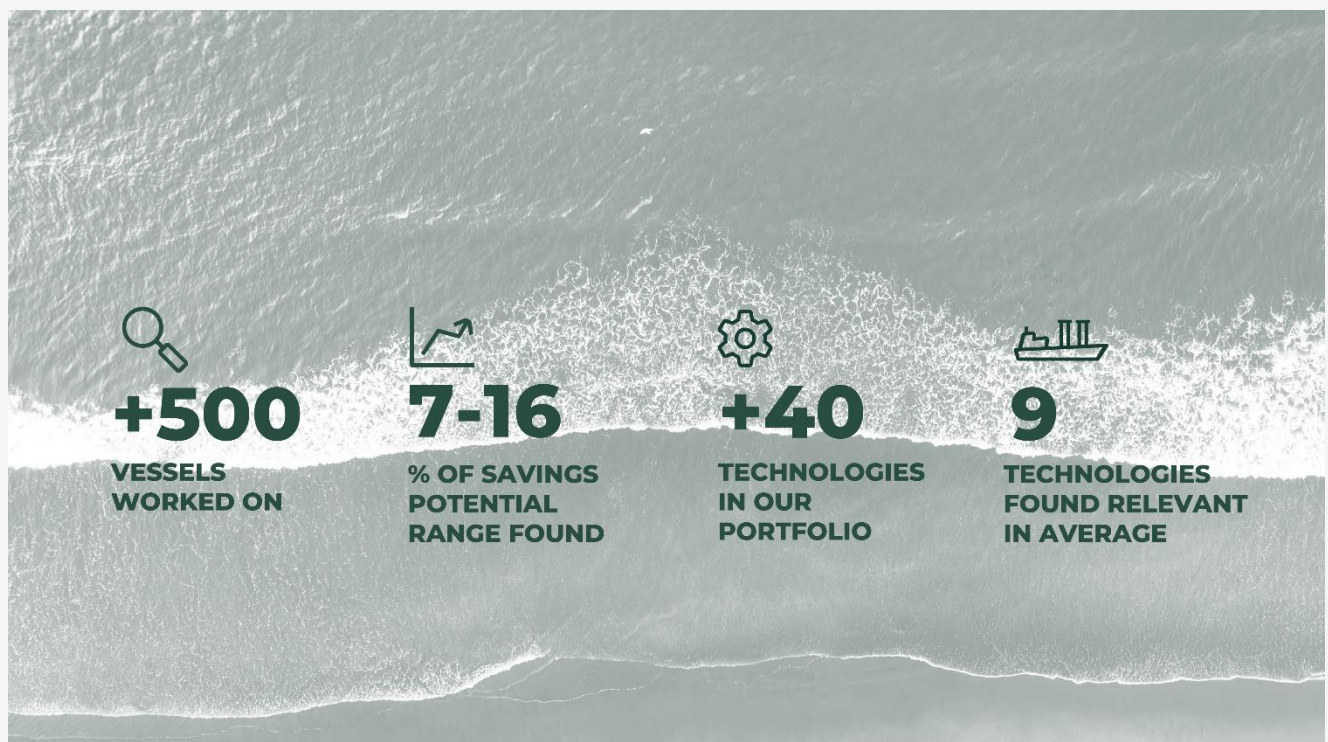



# VESSEL PARTICULARS

## General Information of Vessel

Vessel Name	FWN Arctic
IMO Number	9931484
Vessel Owner	FWN Arctic B.V.
Commercial Manager	Forestwave Navigation BV
Technical Manager	Forestwave Navigation BV
Vessel Type	General Cargo
Build Year	2023
Flag	Netherlands
Classification Society	Bureau Veritas
Gross Tonnage	8360
Dead Weight	12567
Next Drydock Scheduled Date	06.07.2028

Machinery Details	
Main Engine: Type and Make	Wartsila W6L32
Main Engine: No. of Engines	1
Main Engine: Max Power	3300 kW
Main Engine: Max RPM	750
Main Engine: Power Limitations	10% as per ISO-3046
Auxiliary Engine: Type and Make	Volvo Penta D13C1
Auxiliary Engine: No. of Engines	2
Auxiliary Engine: Max Power	756 kW
Boiler: Type and Make	VIESSMAN VITOPLEX 100 Type PV 1
Boiler: Capacity	200kW
Hull: Antifouling Paint Specification and Paint Name	Jotun SeaQuantum Classic S (Drk. & Lht. Red)
Ballast Water Treatment System. Make and model	Headway OceanGuard HMT-450
Loading Computer. Make and model	Delftload 2783 Version 15.40
Scrubber/EGCS? If yes, Make, Model and Type (Open or Closed Loop)	NO

Consumption	
Annual Main Engine Consumption	2133MT 0.1% SO, This is total sea consumption, we assume AE's/boiler are not used at sea.
Annual Auxiliary Engines Consumption	105MT 0.1% SO. This is the total consumption in port. Veslink assumes that the M.E. is not in use, and does not make a distinction between AUX's/boiler/other.
Annual Boiler Consumption	N/A



Annual "Other" Consumption	N/A
----------------------------	-----

Operation Profile	
No. of Days Ballast in 1 year	34
No. of Days Laden in 1 year	124 days in port. Veslink does not support distinction idle/loading/discharging in port.
No. of Days Idle/Load port in 1 year	N/A
No. of Days discharging in 1 year	N/A
General trade route of the vessel (voyages and ports/topography)	Europe/Turkey/Caribbean/South America/North Africa
Total Annual Distance (365 days)	53850 NM

Existing Energy saving devices and Equipment	
Main Engine	NONE
Hull	NONE
Auxiliary Engines	NONE
Boiler	NONE
Others	NONE
Voyage Planning	SPOS
Is Auto Logging available on the vessel?	NO
Are Mass Flow Meters installed? If yes, which are the consumers?	Volumetric Flowmeter (ME-VZF 40FL 130/25), (AE-VZF II 20RC 130/16), (Heater of Heatmaster system-VZF II 20RC 130/16)
Is BWTS Installed? if yes, type and capacity	Headway OceanGuard HMT-450
Is the vessels installed with a scrubber? if yes, please specify Open Loop / Closed Loop	NO
Which consumers are covered by the scrubber? example ME, Auxiliary Engines, Boiler	N/A
kWhr meter available?	YES
Shaft Power Meter available?	YES
Economisers (EGB) fitted on AEs and ME?	NO
Are VFDs installed? If YES, which all equipment are covered?	AC/Orcan/Steering gear
Other Machinery Details where ESDs applicable (e.g. Cargo plant for Gas Carriers)	N/A
Make and Model of Loading software onboard	Delftload 2783 Version 15.40

Any other information	
-----------------------	--



# BUSINESS CASE

## ANNUAL SAVINGS POTENTIAL OF THE TECHNOLOGIES CONSIDERED

Savings potential

**15.0%**

MT CO<sub>2</sub> per year savings

**1057**

MT Fuel savings

**335**

Main Engine

**324**

Aux Engine

**11**

Other

**0**

A total of 8 technologies have been used out of which 5 are of direct saving category and 3 are enabled savings.

2 technologies will have impact on EEXI value, and 9 technologies will have impact on CII ratings

## FINANCIALS FOR THE TECHNOLOGIES CONSIDERED

Return of investment (years)

**5.05**

Total investment USD

**845,000**

Yearly bunker savings USD

**167,361**

Bunker prices, as mentioned in the assumption section of this report, has been considered for calculation of yearly bunker savings and return on investment.





# REGULATORY IMPACT

## EU-ETS IMPACT

Return Of Investment (Years)

# 4.01

Total investment USD

# 845,000

Yearly bunker savings of USD

# 167,361

The vessel is found to be trading less than 50% in the EU region. We have considered for reference assuming 50% of the vessel trades in the EU region.

Estimated savings from EU ETS CO<sub>2</sub> for the years:

- 2026 (100%)

The carbon credits price is taken as 82.00 USD/ CO<sub>2</sub>-MT

# 43,329 USD

The amended return on investment stated above takes into consideration the amount of EU carbon tax saved by applying the technologies suggested over 1 years only. Any additional EU trading beyond this point will improve the business case further.



## FUELEU MARITIME IMPACT

Existing penalty – 62,594 \$  
Penalty post ESD – 53,205 \$  
Savings – 9,389 \$

Return Of Investment (Years)

# 3.84

Total investment USD

## 845,000

Yearly bunker savings of USD

## 167,361

For reference, we assumed that 50% of the vessel trades were in the EU region.

Total savings towards FuelEU:

## 9,389 USD

The amended return on investment stated above takes into consideration the amount of FuelEU Penalty savings and the EU carbon tax saved by applying the technologies suggested over one year only. Any additional EU trading beyond this point will improve the business case further.

The FuelEU maritime regulation sets the limit on the GHG intensity of energy used on board in the EU and imposes a penalty if a vessel's GHG intensity goes beyond the prescribed limit. Thus, the regulation promotes the use of shore power, certified renewable, and low-carbon fuels without recommending any particular type of fuel.

In addition, there is a specific reward factor for wind-assisted propulsion, which can be studied at the solution design stage.



## CII IMPACT







Year	2025	2026	2027	2028	2029	2030
Required CII	13.67	13.37	12.98	12.58	12.19	11.79
CII Rating	A	A	B	B	B	C
Corrected Rating- NJORD ESD	A	A	A	A	A	A

1. Annual Efficiency Ratio (AER) and CII Ratings are calculated on basis of submitted IMO DCS data for the year 2026 and as per MEPC. 78
2. \* The CII Calculation is without Correction factors for electrical consumption of cargo heating as per MEPC.355(78)
3. Operational profile of vessel for the following years is assumed to be same as 2026 and after adoption of Njord EET the Deadweight remains unchanged.
4. After applying the suggested Njord EET package, improvement in savings rate is observed. It remains in 'A' till 2030 from the current rating.





# BASIC TECHNOLOGIES

\*The savings ranges stated in this table showcases how technologies will perform on respective machinery (Main Engine/Auxiliary Engine/Boiler) if installed individually.

Technology		Description	Savings Category	Regulatory Impact EEXI/CII	Install in Drydock / Service	Savings Range %	Cost Range (USD)
	Flow Stream Duct	A pre-swirl hydrodynamic device to improve the flow into the propeller by creating a swirl in the opposite direction of the propeller's rotation, the device helps to straighten the wake and reduce rotational losses.	DS	CII and EEXI	Drydock	2.5 - 3.5	200K-250K
	Main Engine Lube Oil Fine Filters	Filtering engine oil instead of purification in a separator saves on separator running costs and lube oil replenishing intervals and eases the operation.	ES	CII	Both	0.2-0.8	35K-40K
	RPM & PITCH Optimisation	RPM and Pitch Optimization systems adjust engine speed and propeller pitch in real time using optimized combinator curves. This helps maintain consistent power and speed throughout a voyage, improving fuel efficiency and overall propulsion performance.	ES	CII	Both	5.0-8.0	150K-200K
	Data Auto-logging	Data Auto logging takes data from various engine parameters and navigational equipment; data analytics is employed to gain insights.	ES	CII	Both	1.0- 2.0	90K-120K
	Auto Pilot Upgrade	Updated autopilot includes unique algorithms that ensure highly precise steering performance where it is needed, even at low speed	ES	CII	Both	0.8 -1.5	25-30k
	Propeller Fouling Protection - Ultrasound for Propeller	Ultrasonic propeller antifouling system. This device emits ultrasonic waves through the shaft to prevent marine growth on the propeller blades. As it's a preventive system, installation must begin with a clean propeller surface.	DS	CII	Both	0.8-1.2	25K-35K



Technology		Description	Savings Category	Regulatory Impact EEXI/CII	Install in Drydock / Service	Savings Range %	Cost Range (USD)
	Variable Frequency Drives	Variable frequency drives enable capacity control of pumps and fans, instead of on/off operation. These drives operate autonomously by sensing the running parameters of the engine and system load.	DS	CII	Both	0.8-1.8	200K-220K
	LED	LED lights with low power consumption on AE have a longer running range and are a direct savings.	DS	CII	Both	0.4-1.0	40K-60K



# NEXT STEP - NJORD'S SOLUTION DESIGN

Get a detailed verification of each technology in scope, and have a tailor-made installation guide, ready to execute.

## NJORD'S SOLUTION DESIGN INCLUDES THE FOLLOWING:

- Confirmation of consumption profiles
- Confirmation of fuel savings per technology
- EEXI and CII impact analysis per technology
- Alignment and retrieval of CFD calculations from suppliers (if required, at cost)
- Recommendations for which supplier to choose per technology
- Determination of cost per technology (including and split in logistics, equipment, and installation costs)
- Performance studies for selected relevant technologies

## WE PARTNER WITH THE LEADING TECHNOLOGY PROVIDERS

to design systems custom made for your vessels. Get to know how this will impact on the existing vessel performance.

**THROUGH OUR SOLUTION DESIGN**, we provide you with the clarity and guidance you need to reduce emissions, comply with regulations, and save fuel.



**OUR TEAM OF INDUSTRY EXPERTS ANALYSE THE SYSTEMS ON THE VESSEL** and find the best suited technology and tailor fit it to the existing environment on board!

When we design solutions, we deep dive into actual operational and consumption profiles in the last 365 days to scope out the best possible fit.

**READ MORE ABOUT  
SOLUTION DESIGN HERE**

**BREAKDOWN OF SAVINGS,  
COSTS, AND PAYBACK  
TIME FOR INDIVIDUAL  
TECHNOLOGIES**

**DETAILED ANALYSIS OF  
EVERY TECHNOLOGY AND  
HOW IT AFFECTS**





**Mayur Parab**

Senior Technical Solutions Manager  
+91-8657887012  
[mayur.parab@njordsolution.com](mailto:mayur.parab@njordsolution.com)

**Maersk Tankers A/S**

Holmbladsgade 133  
2300 Copenhagen S, Denmark  
[www.njordsolution.com](http://www.njordsolution.com)

Powered by

