

GREEN
TECH
SOLUTION

nJØRD



TECHNOLOGY
SCREENING

DIAMANTGRACHT
IMO NUMBER 9420813
SEPTEMBER 2025

EXECUTIVE SUMMARY

Njord has completed a Technology Screening for vessel Diamantgracht. Below are the key findings.

KEY FINDINGS

9

Number of techs.
found relevant

15.5

Savings potential in %

3.28

Return on Investment
in Years

930,000

Total Investment in USD

283,381

Yearly Bunker Savings in USD



NJORD SCORE

Njord Score	A	B	C	D	E
Remaining Savings Potential	< 3%	< 6%	< 9%	< 12%	+ 12%

The Njord Score of vessel DIAMANTGRACHT is D.

The score given is based on how much the vessel can improve its efficiency through the application of a combined Energy Savings Technology package, that does not supersede 2.5 years ROI.

6

Number of techs.
found commercially
viable

10.8

Savings potential
in %

2.13

ROI in
years

D

Benchmark
score

The figures above highlight the total number of commercially viable technologies yet to be explored, their combined savings impact and ROI. The benchmark Njord Score reflects how similar vessels, which Njord has worked on, are currently rated.

[READ MORE ABOUT THE
NJORD SCORE HERE](#)





1	EXECUTIVE SUMMARY	2
2	NJORD SCORE	3
3	GENERAL INFORMATION	5
4	VESSEL PARTICULARS	7
5	BUSINESS CASE	9
6	REGULATORY IMPACT	10
7	BASIC TECHNOLOGIES	13
8	NEXT STEP - NJORD'S SOLUTION DESIGN	15



GENERAL INFORMATION

METHODOLOGY

This Technology Screening is based on Njord's experience of +500 vessel assessments and +200 Energy Efficiency Technologies (EETs) installations. For DIAMANTGRACHT, Njord has utilized insights from work completed on similar vessels in terms of segment, size, and trading patterns. To avoid overlapping savings when applying multiple technologies, all technologies are prioritized based on impact. For example, if Technology X (priority 1) has a 10% individual impact and Technology Y (priority 2) has a 5% individual impact, Y's effect is calculated on the remaining 90% of fuel consumption. This approach ensures accuracy when applying multiple EETs and the avoidance of counting savings twice.

Novel technologies are discussed separately and not included in the report.

ASSUMPTIONS

The Technology Screening is based on data provided by Spliethoff's Bevrachtingskantoor B.V. to Njord. Equipment and installation prices are based on

average figures from recent projects, and includes all-in costs (equipment, logistics, and installation). Final prices will depend on the specific project, volume, and negotiations.

The saving potential is divided across two technology categories:

Direct Savings Technologies (DS) directly impact vessel performance post-installation and may influence EEXI.

Enabled Savings Technologies (ES) improve technical and/or operational efficiency.

The following bunker prices have been considered for the cost calculation:


HFO – 406 USD/MT

MGO – 652 USD/MT

VLSFO – 499 USD/MT

EU Carbon Price – 82.00 USD/MT



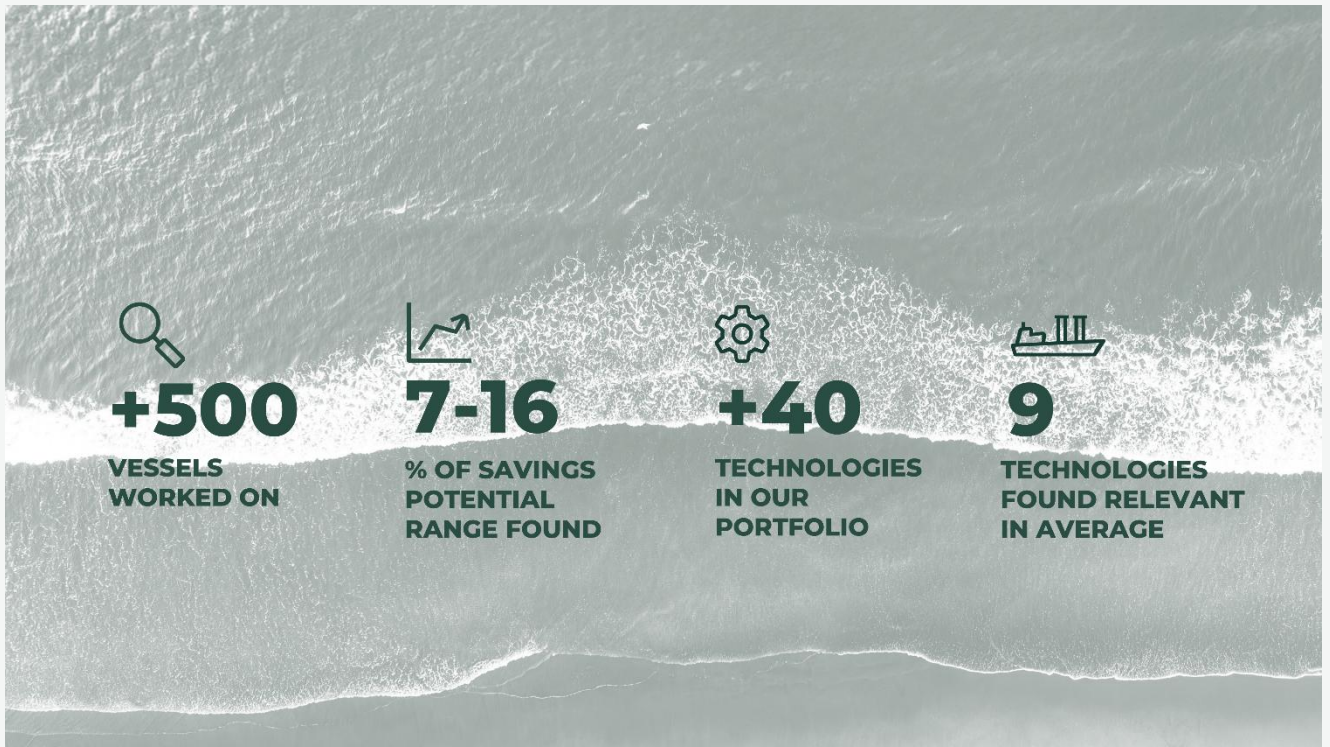

VESSEL PARTICULARS

General Information of Vessel

Vessel Name	Diamantgracht
IMO Number	9420813
Vessel Owner	Spliethoff's Bevrachtingskantoor B.V.
Commercial Manager	Spliethoff's Bevrachtingskantoor B.V.
Technical Manager	Spliethoff's Bevrachtingskantoor B.V.
Vessel Type	Multi Purpose vessel with container capacity
Build Year	2009
Flag	NLD
Classification Society	LR
Gross Tonnage	13706
Dead Weight	17966
Next Drydock Scheduled Date	May 2027

Machinery Details	
Main Engine: Type and Make	Wartsila W8L46C
Main Engine: No. of Engines	1
Main Engine: Max Power	8400 kW
Main Engine: Max RPM	500
Main Engine: Power Limitations	85% from max continuous output(not for EEXI)
Auxiliary Engine: Type and Make	MITSUBISHI HEAVY INDUSTRIES, LTD. Model S6R2-MPTKF
Auxiliary Engine: No. of Engines	3
Auxiliary Engine: Max Power	490kW
Boiler: Type and Make	Heatmaster THH 1250
Boiler: Capacity	1250kW
Hull: Antifouling Paint Specification and Paint Name	vertical sides: Intersmooth 7460 SPC-BEA 757-RED 150 micron Flat bottom: Interswift 6600 BMA664 Red 90 micron
Ballast Water Treatment System. Make and model	Panasia model GLoEN-P750
Loading Computer. Make and model	Click or tap here to enter text.
Scrubber/EGCS? If yes, Make, Model and Type (Open or Closed Loop)	Ecospray model: ECO-EGC open loop system

Consumption	
Annual Main Engine Consumption	3421 HFO / 41 LSMGO / 343 VLSFO
Annual Auxiliary Engines Consumption	423 LSMGO
Annual Boiler Consumption	45 LSMGO



Annual "Other" Consumption	4 LSMGO
----------------------------	---------

Operation Profile	
No. of Days Ballast in 1 year	26
No. of Days Laden in 1 year	207
No. of Days Idle/Load port in 1 year	59
No. of Days discharging in 1 year	67
General trade route of the vessel (voyages and ports/topography)	Worldwide
Total Annual Distance (365 days)	47593 NM

Existing Energy saving devices and Equipment	
Main Engine	Power controlCPP, Fixed RPM, shaft generator
Hull	non
Auxiliary Engines	non
Boiler	non only warning when Dumpcooler is active and burner active at same time (heating and cooling)
Others	Shaft generator
Voyage Planning	SPOS / One Ocean
Is Auto Logging available on the vessel?	Spliethoff Datacollector
Are Mass Flow Meters installed? If yes, which are the consumers?	Main engine VAF J5025PT2
Is BWTS Installed? if yes, type and capacity	Yes,Panasia model GLoEN-P750 capacity 750m3/hr
Is the vessels installed with a scrubber? if yes, please specify Open Loop / Closed Loop	Yes, open loop
Which consumers are covered by the scrubber? example ME, Auxiliary Engines, Boiler	Main engine
kWHr meter available?	no
Shaft Power Meter available?	no
Economisers (EGB) fitted on AEs and ME?	main engine only
Are VFDs installed? If YES, which all equipment are covered?	on supply pumps scrubber 2 pcs and on dilution pump 1 pcs on steering gear pump 2 pcs
Other Machinery Details where ESDs applicable (e.g. Cargo plant for Gas Carriers)	Not applicable
Make and Model of Loading software onboard	Seasafe (Gstab3)

Any other information	
-----------------------	--



BUSINESS CASE

ANNUAL SAVINGS POTENTIAL OF THE TECHNOLOGIES CONSIDERED

Savings potential

15.5%

MT CO₂ per year savings

2,074

MT Fuel savings

664

Main Engine

615

Aux Engine

48

Other

1

A total of 9 technologies have been used out of which 5 are of direct saving category and 4 are enabled savings.

2 technologies will have impact on EEXI value, and 9 technologies will have impact on CII ratings

FINANCIALS FOR THE TECHNOLOGIES CONSIDERED

Return of investment (years)

3.28

Total investment USD

930,000

Yearly bunker savings USD

283,381

Bunker prices, as mentioned in the assumption section of this report, has been considered for calculation of yearly bunker savings and return on investment.



REGULATORY IMPACT

EU-ETS IMPACT

Return Of Investment (Years)

2.51

Total investment USD

930,000

Yearly bunker savings of USD

283,381

We have considered for reference assuming 51% of the vessel trades in the EU region.

Estimated savings from EU ETS CO₂ for the years:

- 2026 (100%)

The carbon credits price is taken as 82.00 USD/ CO₂-MT

86,713 USD

The amended return on investment stated above takes into consideration the amount of EU carbon tax saved by applying the technologies suggested over 1 year only. Any additional EU trading beyond this point will improve the business case further.



FUELEU MARITIME IMPACT

Existing penalty – 135,164 \$
Penalty post ESD – 114,213 \$
Savings – 20,950 \$

Return Of Investment (Years)

2.38

Total investment USD

930,000

Yearly bunker savings of USD

283,381

For reference, we assumed that 51% of the vessel trades were in the EU region.

Total savings towards FuelEU:

20,950 USD

The amended return on investment stated above takes into consideration the amount of FuelEU Penalty savings and the EU carbon tax saved by applying the technologies suggested over one year only. Any additional EU trading beyond this point will improve the business case further.

The FuelEU maritime regulation sets the limit on the GHG intensity of energy used on board in the EU and imposes a penalty if a vessel's GHG intensity goes beyond the prescribed limit. Thus, the regulation promotes the use of shore power, certified renewable, and low-carbon fuels without recommending any particular type of fuel.

In addition, there is a specific reward factor for wind-assisted propulsion, which can be studied at the solution design stage.



CII IMPACT







Year	2025	2026	2027	2028	2029	2030
Required CII	11.90	11.64	11.30	10.95	10.61	10.27
CII Rating	E	E	E	E	E	E
Corrected Rating- NJORD ESD	D	D	E	E	E	E

1. Annual Efficiency Ratio (AER) and CII Ratings are calculated on basis of submitted data for the year 2024 and as per MEPC. 78
2. Operational profile of vessel for the following years is assumed to be same as 2024 and after adoption of Njord EET the Deadweight remains unchanged.
3. After applying the suggested Njord EET package, improvement in savings rate is observed. It improves to "D" till 2026 but then remains in "E" till 2030.






BASIC TECHNOLOGIES

*The savings ranges stated in this table showcases how technologies will perform on respective machinery (Main Engine/Auxiliary Engine/Boiler) if installed individually.

Technology		Description	Savings Category	Regulatory Impact EEXI/CII	Install in Drydock / Service	Savings Range %	Cost Range (USD)
	Main Engine Lube Oil Fine Filters	Filtering engine oil instead of purification in a separator saves on separator running costs and lube oil replenishing intervals and eases the operation.	ES	CII	Both	0.2-0.8	40K-60K
	Auto Pilot Upgrade	Updated autopilot includes unique algorithms that ensure highly precise steering performance where it is needed, even at low speed	ES	CII	Both	1.0 -2.0	15K-20k
	Propeller Fouling Protection - Ultrasound for Propeller	Ultrasonic propeller antifouling system. This device emits ultrasonic waves through the shaft to prevent marine growth on the propeller blades. As it's a preventive system, installation must begin with a clean propeller surface.	DS	CII	Both	0.5-1.0	25K-35K
	Premium Hull Coating - Premium Antifouling Coating	The Premium antifouling paint is ultra-low friction and has an excellent hydrolysis property. It uses silyl methacrylate as a binder, which enables worldwide trading vessels.	DS	CII	Drydock	1.0 - 2.0	90K–130K*
	RPM & PITCH Optimisation	RPM and Pitch Optimization systems adjust engine speed and propeller pitch in real time using optimized combinator curves. This helps maintain consistent power and speed throughout a voyage, improving fuel efficiency and overall propulsion performance.	ES	CII and EEXI	Both	8-10	160K-200K
	Flow Stream Duct	A pre-swirl hydrodynamic device to improve the flow into the propeller by creating a swirl in the opposite direction of the propeller's rotation, the device helps to straighten the wake and reduce rotational losses.	DS	CII and EEXI	Drydock	2.0 - 3.0	220K–260K



Technology		Description	Savings Category	Regulatory Impact EEXI/CII	Install in Drydock / Service	Savings Range %	Cost Range (USD)
	Auxiliary Engine Lube Oil Fine Filters	Filtering of engine oil instead of purification in a separator. This saves on separator running costs and lube oil replenishing intervals and eases the operation.	ES	CII	Both	0.4-1.0	60K-80K
	Variable Frequency Drives	Variable frequency drives enable capacity control of pumps and fans, instead of on/off operation. These drives operate autonomously by sensing the running parameters of the engine and system load.	DS	CII	Both	1.2-2.0	180K-220K
	LED	LED lights with low power consumption on AE have a longer running range and are a direct savings.	DS	CII	Both	0.4-1.0	40K-60K

*The numbers represent the total cost. However, delta paint cost has been considered for the business case.



NEXT STEP - NJORD'S SOLUTION DESIGN

Get a detailed verification of each technology in scope, and have a tailor-made installation guide, ready to execute.

NJORD'S SOLUTION DESIGN INCLUDES THE FOLLOWING:

- Confirmation of consumption profiles
- Confirmation of fuel savings per technology
- EEXI and CII impact analysis per technology
- Alignment and retrieval of CFD calculations from suppliers (if required, at cost)
- Recommendations for which supplier to choose per technology
- Determination of cost per technology (including and split in logistics, equipment, and installation costs)
- Performance studies for selected relevant technologies

WE PARTNER WITH THE LEADING TECHNOLOGY PROVIDERS to design

systems custom made for your vessels. Get to know how this will impact on the existing vessel performance.

THROUGH OUR SOLUTION DESIGN, we provide you with the clarity and guidance you need to reduce emissions, comply with regulations, and save fuel.



OUR TEAM OF INDUSTRY EXPERTS ANALYSE THE SYSTEMS ON THE VESSEL and find the best suited technology and tailor fit it to the existing environment on board!

When we design solutions, we deep dive into actual operational and consumption profiles in the last 365 days to scope out the best possible fit.

**READ MORE ABOUT
SOLUTION DESIGN HERE**

**BREAKDOWN OF SAVINGS,
COSTS, AND PAYBACK
TIME FOR INDIVIDUAL
TECHNOLOGIES**

**DETAILED ANALYSIS OF
EVERY TECHNOLOGY AND
HOW IT AFFECTS**



Samil Oberoi

Technical Solutions Manager
+91-8652894865
samil.oberoi@njordsolution.com

Maersk Tankers A/S

Holmbladsgade 133
2300 Copenhagen S, Denmark
www.njordsolution.com

Powered by

