

Project:

Type:

Qty:



FEATURES

- 

LumiWall are engineered for effortless, fast installation in both custom and pre-fabricated architectural coves or ceiling recesses, providing uniform upward wall-wash illumination.
- 

Designed for architects and lighting designers, LumiWall delivers sleek, linear illumination with professional-grade performance and flexibility for a wide range of interior applications.
- 

Quick-connect system for seamless continuous mounting
- 


Selectable color temperatures, CRI>90,
- 

Available in custom patterns, finishes, and lengths
- 

Integrated, dimmable drivers with flexible control options
- 

High-performance aluminum core LED boards for optimal thermal management

SPECIFICATIONS

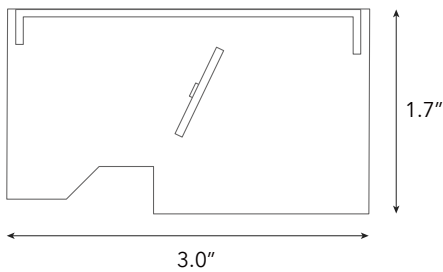

Order Code


ORDER CODE EXAMPLE: GOS-4-T-6W-27K-R36-BL-B-D10-NC

SERIES	SIZE	CCT	FINISH	OUTPUT	DIMMING	MOUNTING						
LumiWall	2	2 ft	27K	2700K/90 CRI	W	White	LOW	Low output	UNV	Universal (120/277V)	COVE	Lay-in to custom or pre-fabricated coves
	4	4 ft	30K	3000K/90 CRI	BL	Black	MED	Medium output	347V	347V		
	8	8 ft	35K	3500K/90 CRI	SLV	Silver	HIGH	High output				
	X"X"	Specify Length	40K	4000K/90 CRI	CC	Custom Color	CUST	Custom output				
	PAT	Pattern (Consult Factory)	50K	5000K/90 CRI								
			TW	Tunable White	2700K-6500K							
			WD	Warm Dim	3000K-1800K							


OPTICS		SENSORS/CONTROLS		EMERGENCY BACKUP		DIMMING	
SD	Standard diffuser	NA	None	EM06	- 6W/90 mins	D10	-0-10V
WA	Wide asymmetric optic	ACM	Acuity nLight Module Only Casambi Module	EM10	- 10W/90 mins	ELV	-ELV/Phase
		CCS	Casambi Module				
		AWNRR	Lutron Athena Wireless Node Module				
		OTHER	Consult Factory				

Project:	Type:	Qty:
----------	-------	------


WAO-FIXTURE DRAWING

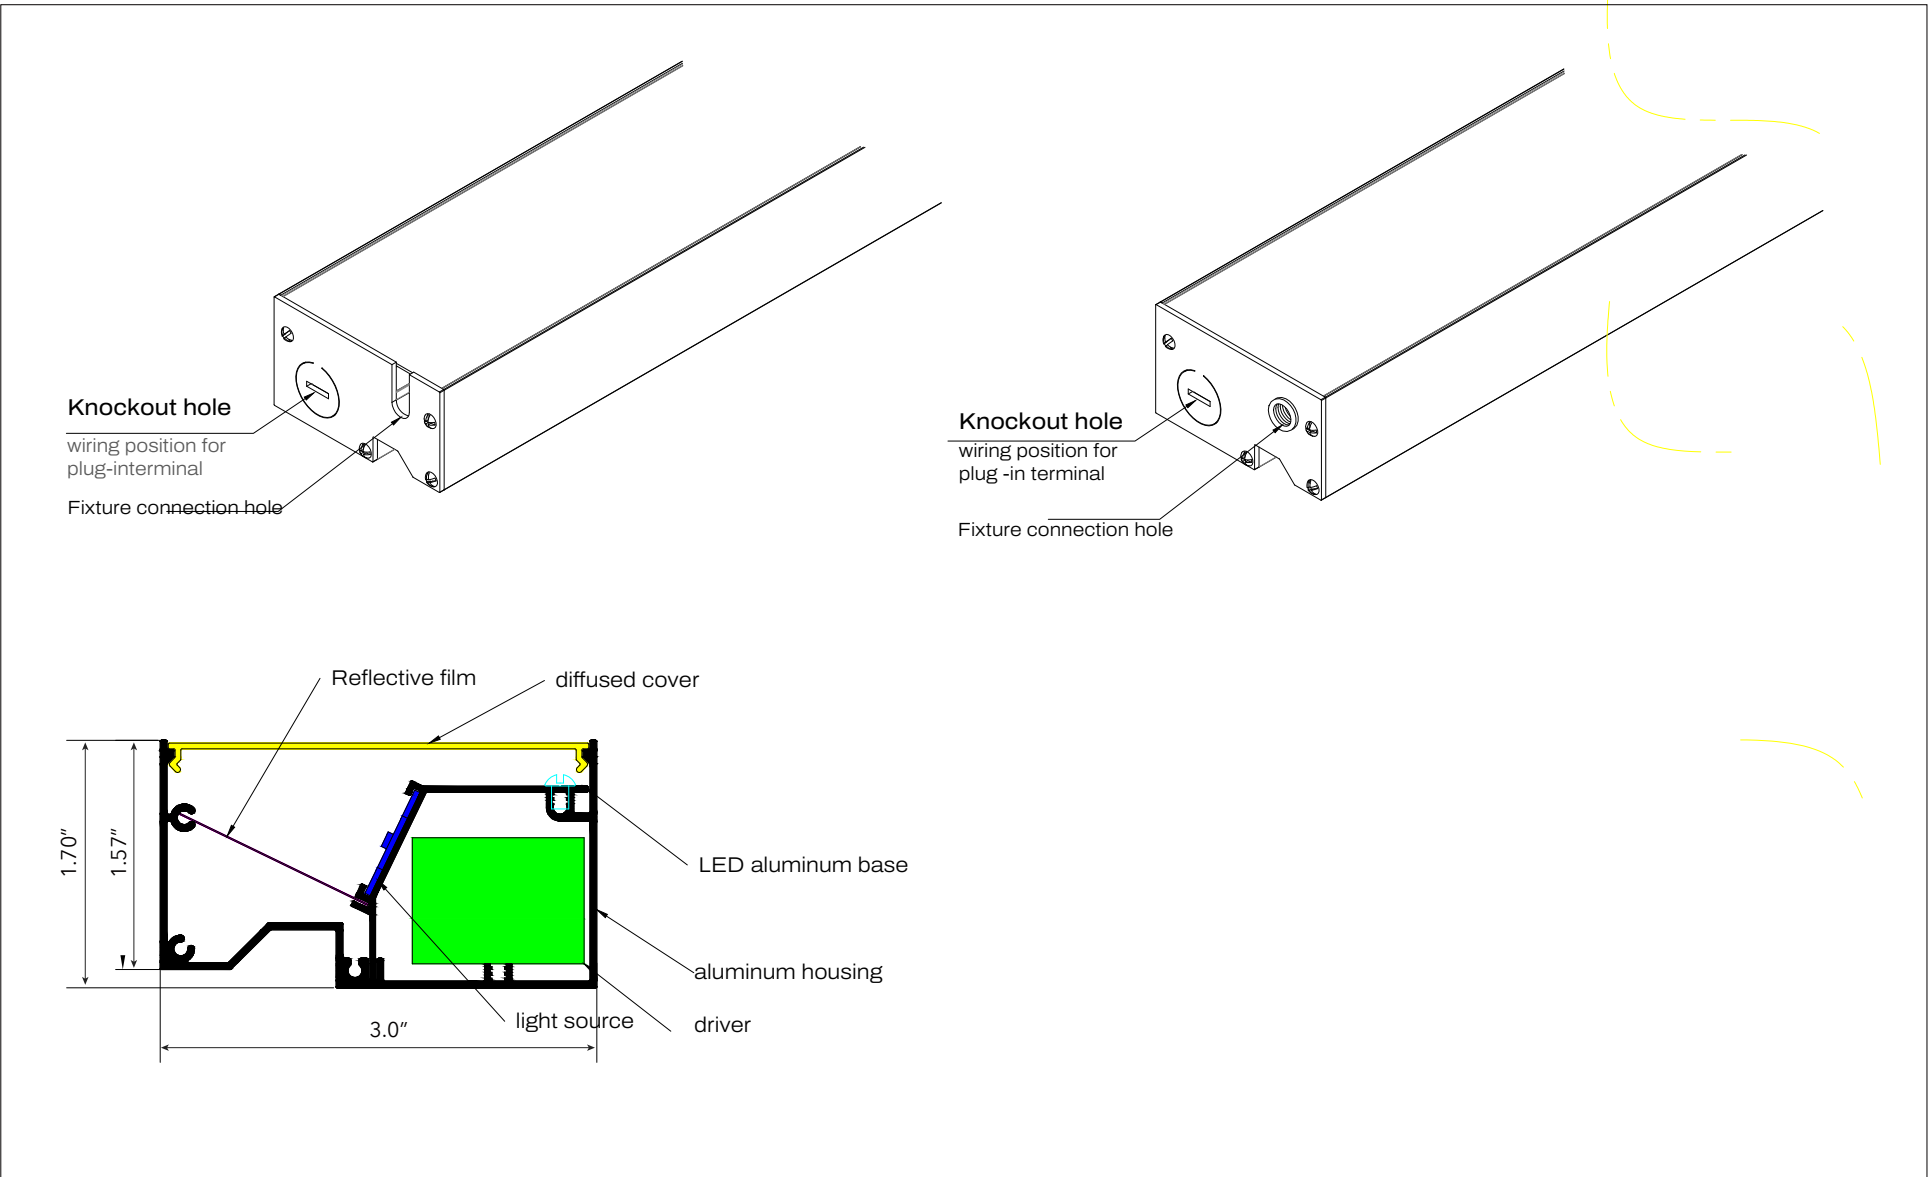

OPTICS

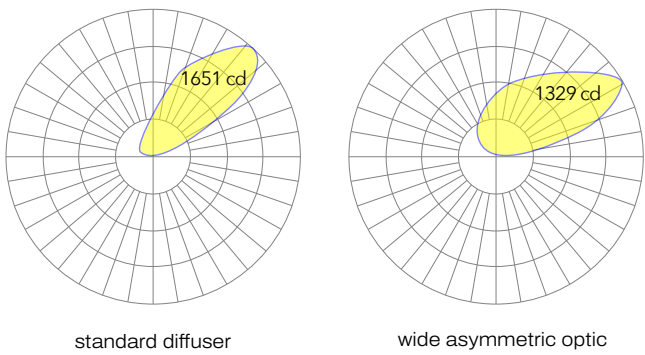

PATTERNS

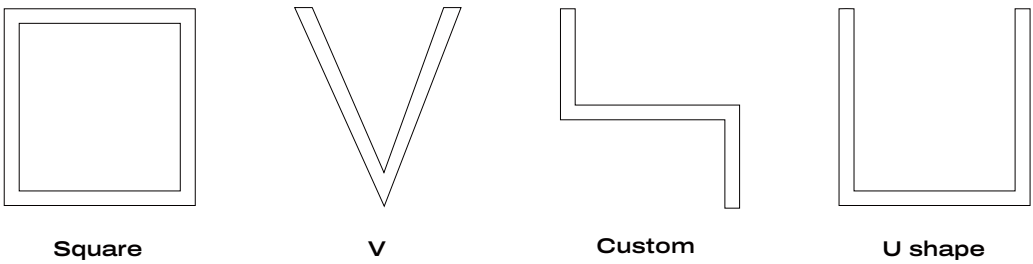

Featuring illuminated welded corners and angles. Contact the factory for custom design options and specific elevations.


Project:

Type:


Qty:

MOUNTING OPTIONS


All ceiling, cove details by others. Below drawings are for general application reference only.

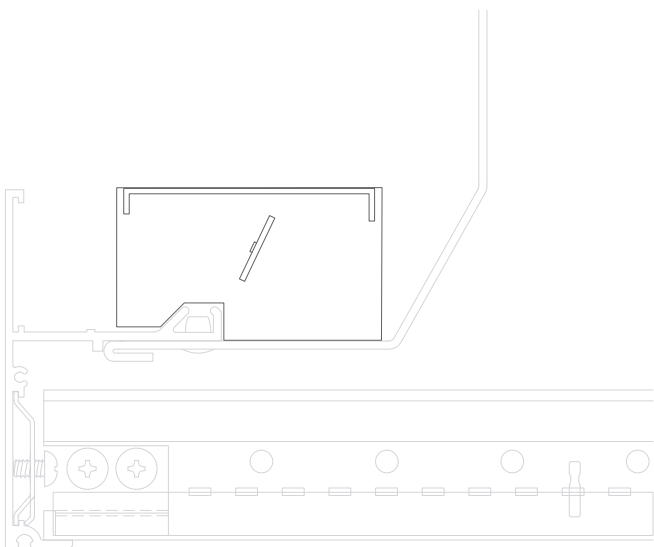

Cove

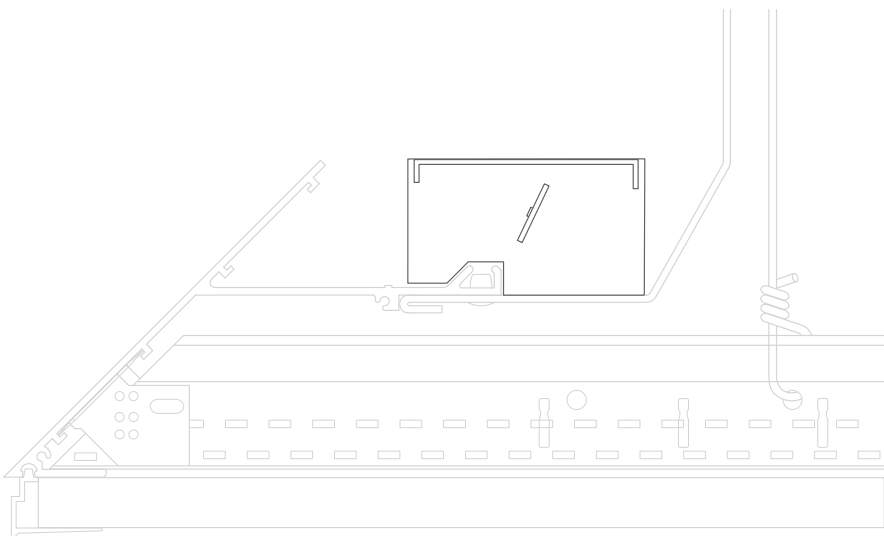

Knife edge

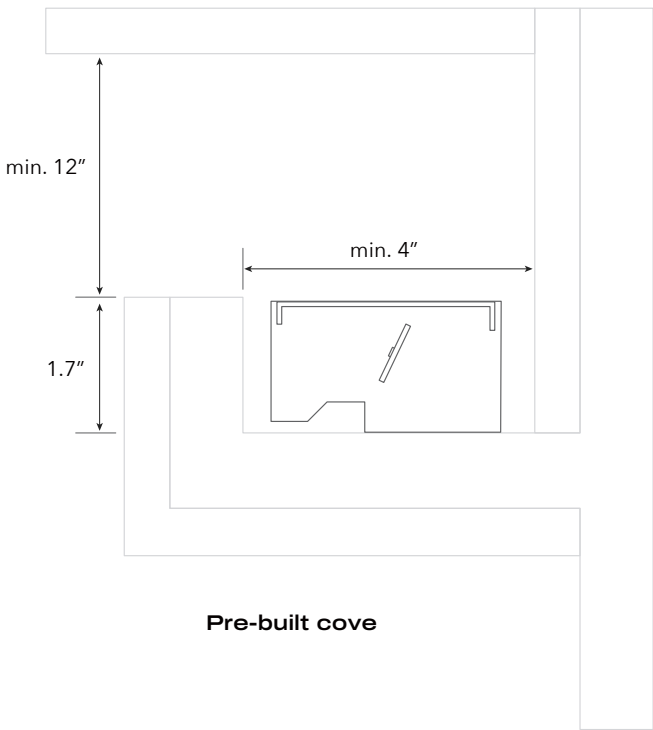

Pre-built cove

Performance

Output ¹	Watts/ft	Lumens/ft
Low	5	400
Medium	7	561
High	10	801

¹ Based on a typically configured with SD lens, 90 CRI, and 3500K luminaire using one driver. Custom outputs available. Please consult factory.
For 4000K multiply by 1.02, for 3000K 0.98, for 2700K 0.96; these multipliers also apply to Tunable White. For Tunable White outputs, multiply by 1.05 for 5000K and by 1.1 for 6500K.