

4inch double lens(DL)

Project:	Type:	Qty:
----------	-------	------



ATLAS Linear

ATLAS Linear features a precision-engineered aluminum frame paired with a high-transmission opal lens for clean, uniform illumination.

Delivering up to 90% energy savings compared to traditional lighting, ATLAS Linear adopts a direct-lit design without LGP, eliminating the risk of yellowing commonly found in edge-lit LED panels. The fixture provides flicker-free performance, helping reduce eye fatigue, and offers instant-on operation, reaching full brightness within 0.5 seconds.

Designed with sustainability in mind, ATLAS Linear contains no harmful substances and incorporates active power factor correction for high efficiency, low THD, and stable electrical performance. The luminaire supports a wide input voltage range of AC 120-277V and is compatible with 0-10V, PWM, and RX dimming, working seamlessly with most dimming systems on the market.

90% energy conservation	0.5S reaching full brightness	120-277V input voltage range
-----------------------------------	---	--

Order Code ORDER CODE EXAMPLE: ATLAS-SL-4"-LO-40W-LD-WITHEM-PWM

SERIES	WIDTH	WATTAGE	CCT	LENS	ACCESSORIES	FINISH	INSTALLATION TYPE
ATLAS-DL	4"	LO	30K 3000K	LM Milky lens	— Leave blank if not required	W White	RD Recessed
	6"	MO	40K 4000K	LD Clear lens	SEM Sensor&EM	B Black	SF Surface
		HO	45K 4500K	LX No lens	EM With EM	C Custom	AM Armstrong clips
		TW Tunable White 2700K-6500K					C# Custom #Consult factory and specify
		WD Warm Dim 3000K-1800K					

GRID			DIMMING		VOLTAGE	
SIZE		TYPE				
M6	600*600mm	24	24 (15/16") Grid	ND	Non dim	120V 120V
M12	1200*1200mm	15	15 (9/16") Grid	D10	0-10V	UNV 110-277V
2FT	2FT	15B	15B Bolt Slot Grid	ELV	ELV	
4FT	4FT			PMW	PWM	
5FT	5FT			DAL	DALI	

WIDTH	LENGTH	OUTPUT		EFFICIENCY	WIDTH	LENGTH	OUTPUT		EFFICIENCY
		TYPE	WATTAGE				TYPE	WATTAGE	
4"	23.7"	LO/MO/HO	10W/15W/20W	100-115lm/W	6"	23.7"	10W/15W/20W	100-115lm/W	
	47.76"		20W/30W/40W			47.76"	20W/30W/40W		
	95.75"		60W/70W/80W			95.75"	60W/70W/80W		

ATLAS Linear


4inch double lens(DL)

Project:

Type:

Qty:

DIMENSIONS

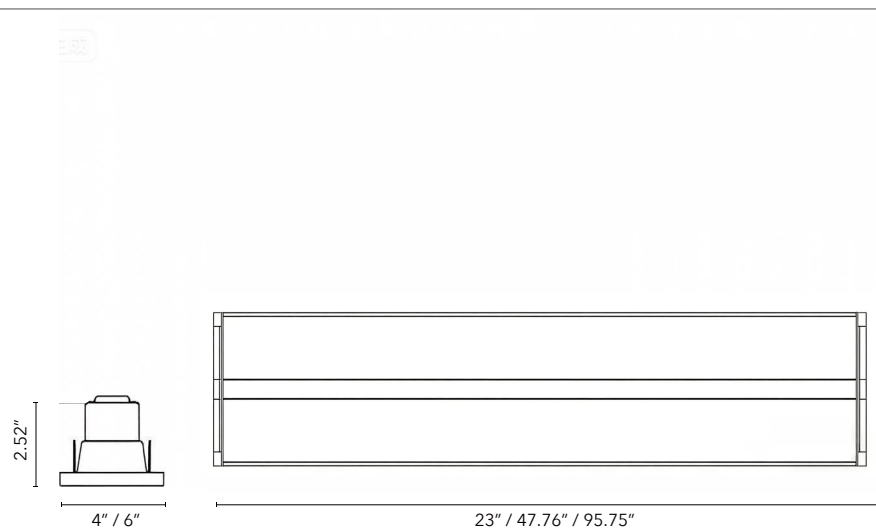

White-painted steel construction, designed for 4" wide applications.
For trimless plaster-in installations, two 4 ft sections may be combined to create an 8 ft run.
Compatible with tegular and lay-in ceiling systems.

*Accessories sold separately. Please contact the factory for configuration details.

