LINEAPRO MEGA


Pixel per Diode

RGBW combined source

24 **pixels in one 4 ft fixture.**

Every diode.
Its own color.

Individual RGBW control turns every LED into its own pixel. Create color waves, chases and gradients along a single fixture, or coordinate multiple fixtures across a continuous facade.

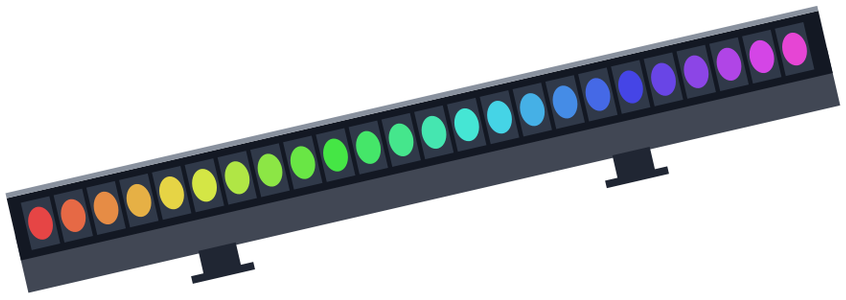


Fixture illustration - not to scale

APPLICATIONS

Media facades · Bridges · Landmarks
Hospitality · Events

ONE 4 FT FIXTURE / 24 DIODES

Standard control — 1 group · 4 DMX channels



One color across the fixture

Pixel per Diode — 24 groups · 96 DMX channels



Independent RGBW control at every diode

Running effect — Sequential frames



Regroup on site via RDM

1 / 2 / 4 / 6 / 12 / 24 groups

Pixel per Diode requires the RDM version. Illustrations show control behavior; pixel count applies to the 4 ft fixture. Configuration, ratings and warranty are subject to BINA confirmation.

CONTROL	COLOR (RGBW)	OPTICS	LENGTHS	POWER / INPUT	RATING / WARRANTY
DMX · RDM · PPF · PPD	**RGB + 2700-6500K**	**20° · 35° · 50° · 20×40°**	**600 · 900 · 1200 mm**	**20 · 30 · 40 W**	**IP66 · 5 years***
RDM required for PPD	White CCT options	Beam options	Nominal lengths	100-277 VAC	*Confirm selected model

LINEAPRO MEGA

Narrow Beam


RGBW combined source

8°

Super narrow beam.

Focused color for vertical architecture.

An ultra-narrow 8° optic concentrates RGBW light into a tight beam for tall facades, columns and pilasters. Choose from multiple beam angles to suit the architectural detail and mounting position.

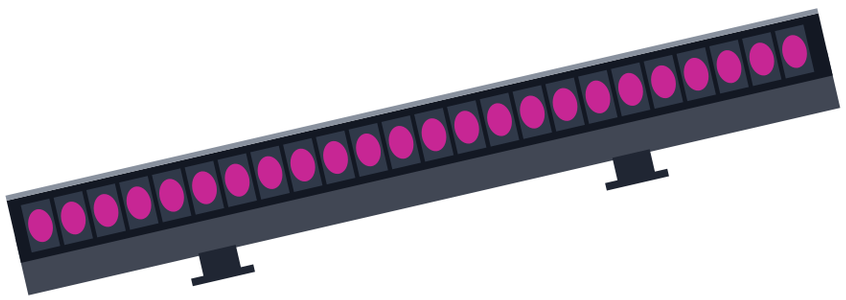

Fixture illustration - not to scale

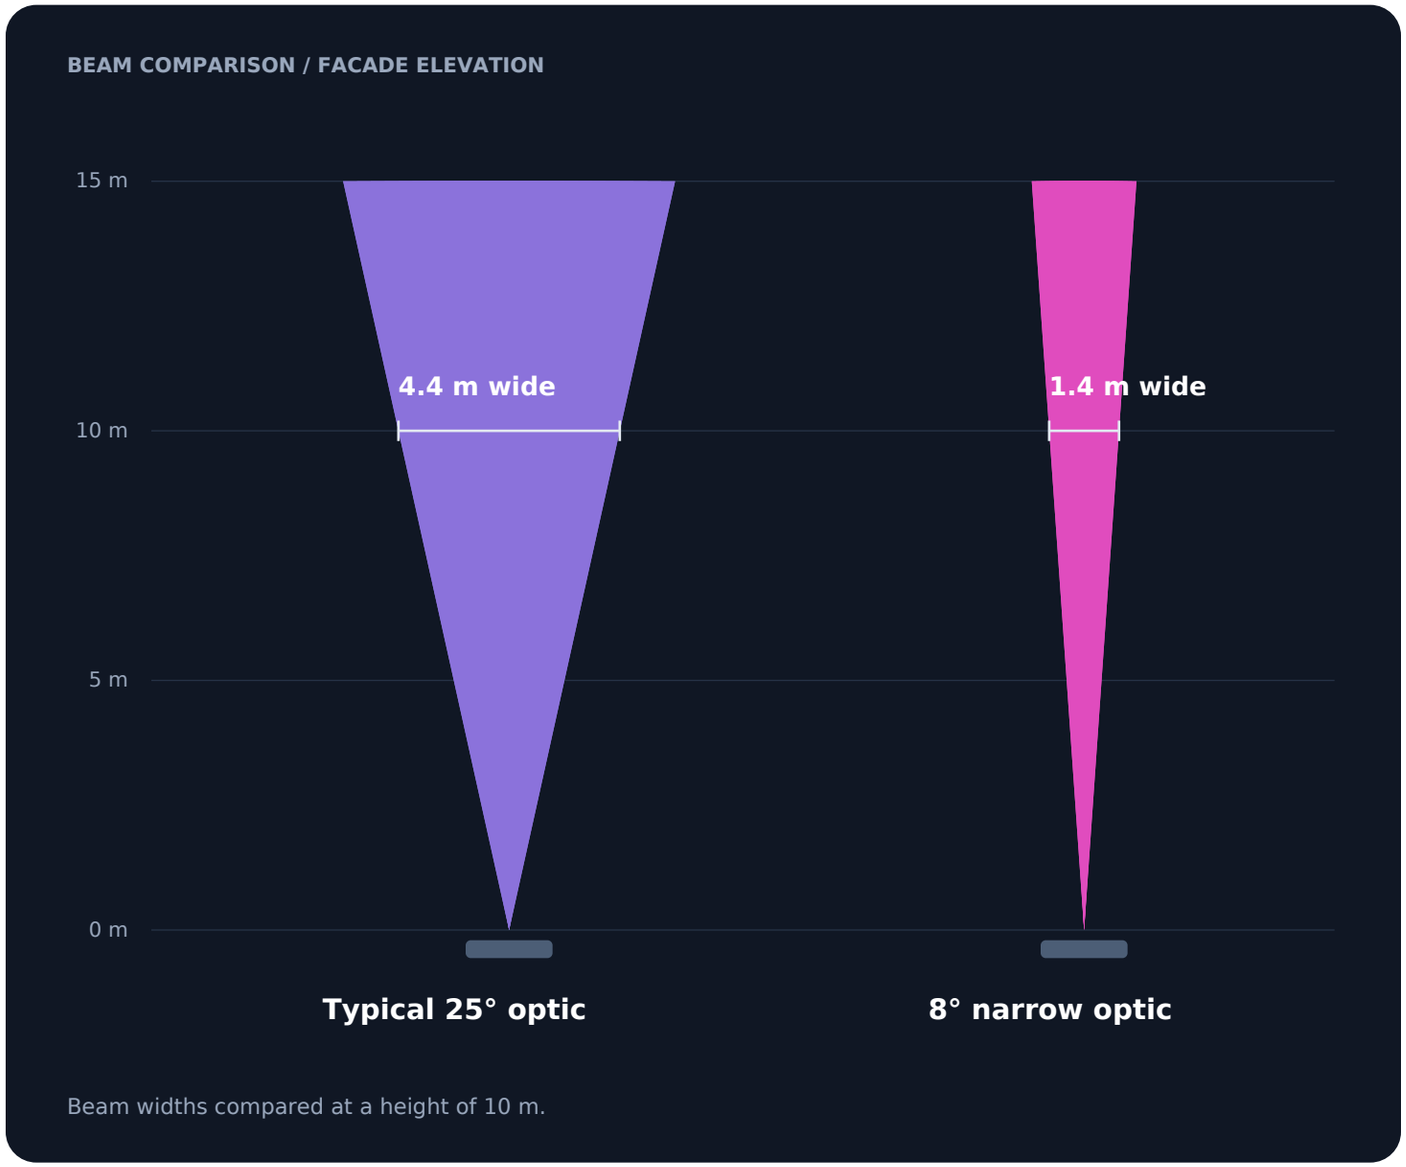


Illustration only; not photometric performance. Beam widths are calculated from nominal beam angles. Actual illumination depends on output, aiming, setback and surface conditions.

CHANNEL OUTPUT

Up to 2× output per channel versus traditional DMX dimming when only one or two colors are in use. RDM version; performance subject to BINA confirmation.

OPTICS	COLOR (RGBW)	LENGTHS	CONTROL	OUTDOOR RATING	COMPLIANCE*
8° · 25° · 33° · 10×35°	**RGB + 3000K / 4000K**	**400 · 600 · 1200 mm**	**DMX · RDM**	**IP66**	**ETL · CE · RoHS**
Beam options	White CCT options	Nominal lengths	Configuration dependent	Confirm selected model	*Confirm; 5-year warranty*

*Certification and warranty availability require BINA confirmation.